COMSOL-based Nuclear Reactor Kinetics Studies at the High Flux Isotope Reactor

David Chandler

Oak Ridge National Laboratory
Research Reactors Division
(research performed while a graduate student in the U. of Tennessee's Nuclear Engineering Dept.)

James D. Freels
ORNL, Research Reactors Division

G. Ivan Maldonado
U. Tennessee, Nuclear Engineering Department

R. T. Primm III
Primm Consulting, LLC

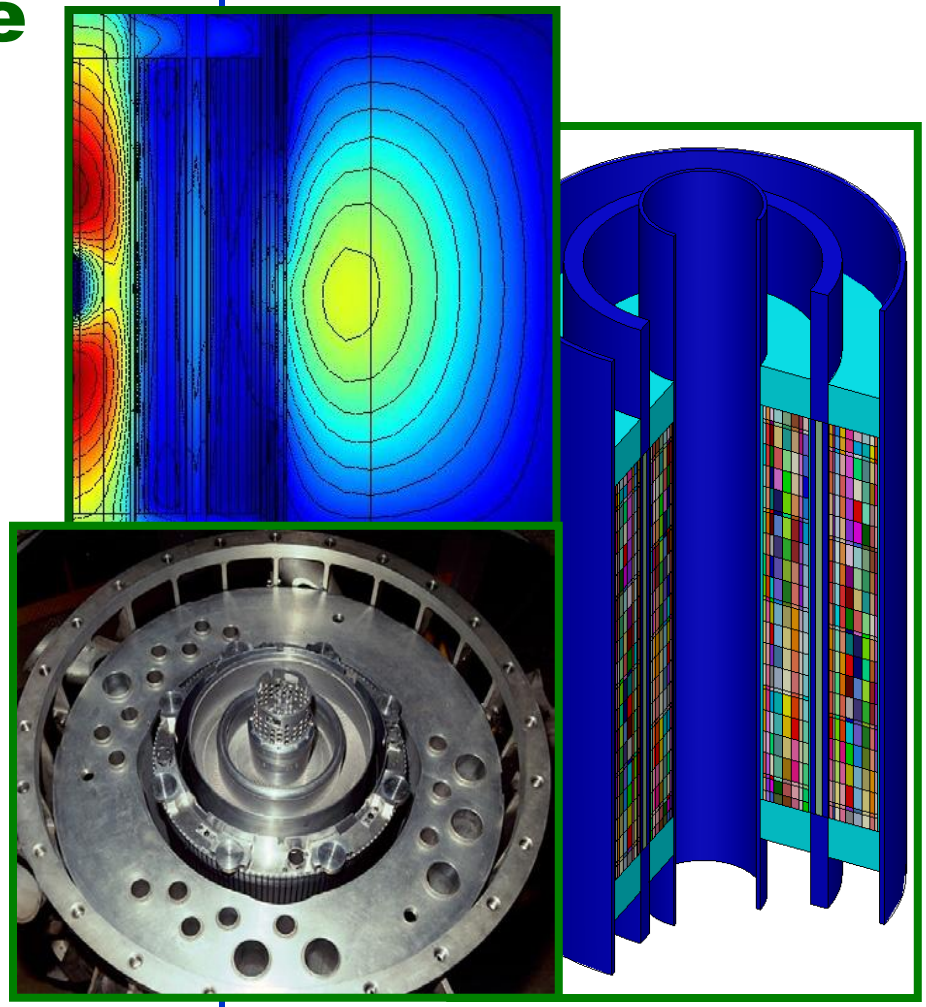

Presented at the COMSOL CONFERENCE BOSTON 2011 OCTOBER 13-15

THE UNIVERSITY of TENNESSEE KNOXVILLE

OAK RIDGE NATIONAL LABORATORY
MANAGED BY UT-BATTELLE FOR THE DEPARTMENT OF ENERGY

Presentation Outline

- Brief HFIR background
- Brief review of reactor physics concepts
- Reactor Kinetics Studies
  - Nuclear data generation via NEWT
  - Control cylinder ejection transient
  - Space-time kinetics equation-based modeling methodology
- Results
- Conclusions

Beryllium reflected, light-water cooled, pressurized, flux-trap type reactor.

- Currently operates at 85 MW_{th}
- Cycle length 21 – 26 calendar days
- Two Fuel Elements [Inner Fuel Element (IFE) and Outer Fuel Element (OFE)]
- Highly Enriched Uranium fuel (~93 wt.% ^{235}U) in the form of U_3O_8-Al with Al-6061 clad
- Two Control Elements (CEs) for regulation and safety purposes
- Cold and thermal neutron scattering, isotope production, materials irradiation, Neutron Activation Analysis

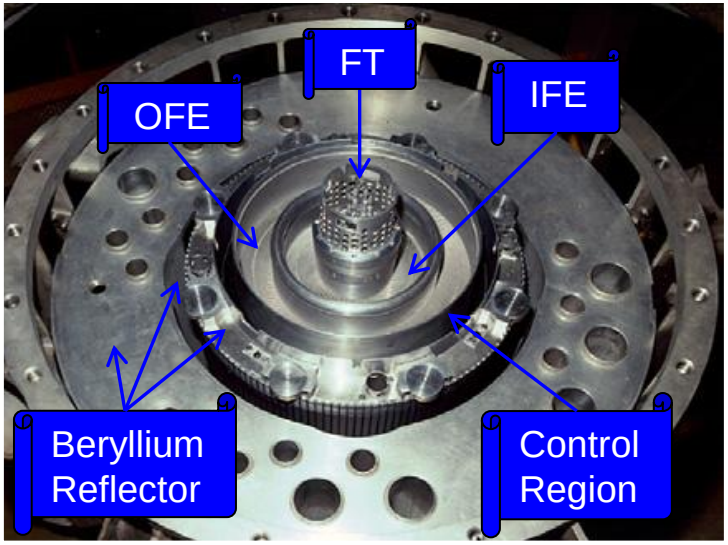

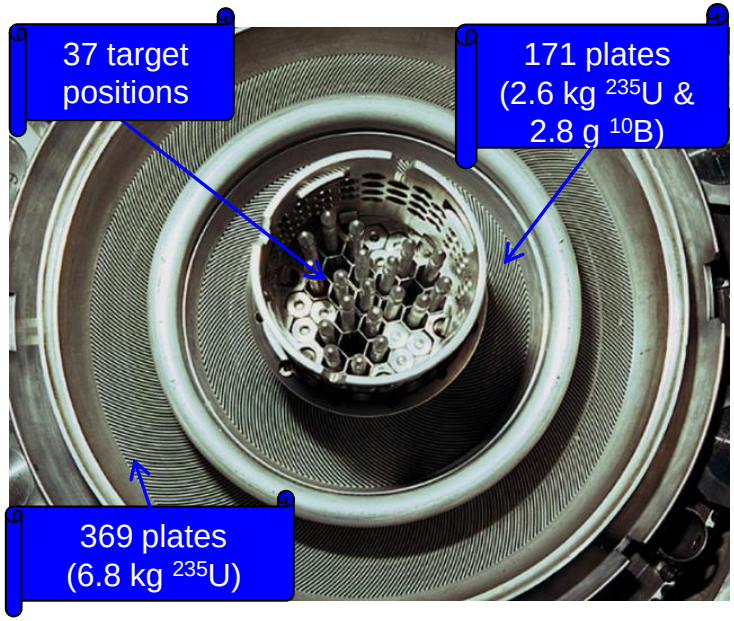

If positive reactivity is inserted, the power will increase. If negative reactivity is inserted, the power will decrease.

- **The effective neutron multiplication factor (k_{eff}) is the ratio of the number of neutrons produced in generation "i+1" to the number produced in generation "i"**
- **Reactivity (ρ cents,** dollars, Δk/k, etc.**) is a measure of the deviation from critical**

$$k_{eff} = \frac{\#\text{ of neutrons in generation "i+1"}}{\#\text{ of neutrons in generation "i"}} = \frac{\text{production}}{\text{absorption} + \text{leakage}}$$

$$\rho = \frac{k_{eff} - 1}{k_{eff}} = 1 - \frac{1}{k_{eff}}$$

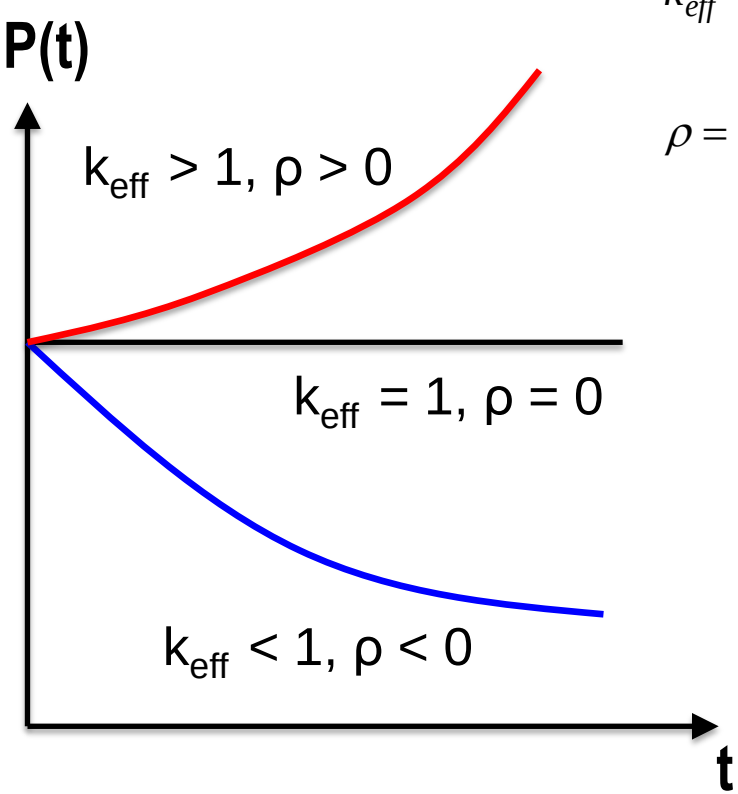

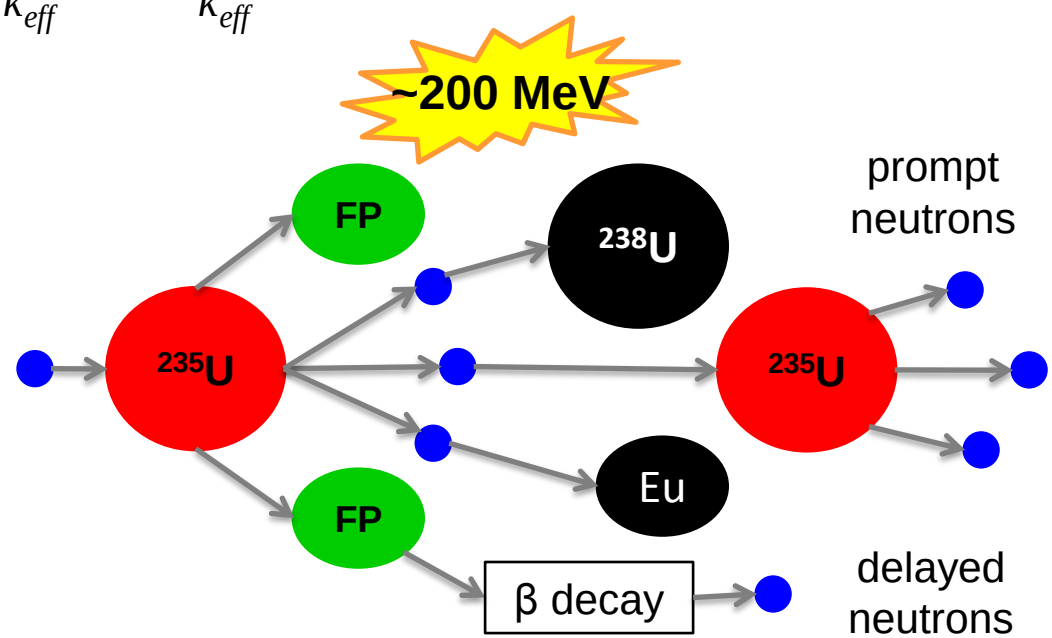

PDE coefficient form application mode.

Multi-Energy-Group Neutron Diffusion

$$\frac{1}{v^g}\frac{\partial \phi^g}{\partial t} - \nabla\cdot(D^g \nabla \phi^g) + \left(\Sigma_a^g + \sum_{g'=1,\neq g}^{G} \Sigma_s^{g\to g'}\right)\phi^g = (1-\beta_{eff})\chi_p^g \sum_{g'=1}^{G} \upsilon \Sigma_f^{g'} \phi^{g'} + \sum_{g'=1,\neq g}^{G} \Sigma_s^{g'\to g}\phi^{g'} + \sum_{i=1}^{I} \lambda_i \chi_i^g C_i$$

$g = 1:3$

$i = 1:6$

ϕ^g	neutron flux (neutrons/m^2-s)
v^g	average neutron velocity (m/s)
D^g	diffusion coefficient (m)
Σ_a^g	absorption cross section (1/m)
$\Sigma_s^{g\to g'}$	scattering cross section g→g' (1/m)
χ_p^g	probability of prompt neutron born in g
υ	average # of neutrons emitted per fission
$\Sigma_f^{g'}$	fission cross section (1/m)

Delayed Neutron Precursor Concentration

$$\frac{\partial C_i}{\partial t} + \lambda_i C_i = \beta_i \sum_{g=1}^{G} \upsilon \Sigma_f^g \phi^g$$

C_i	DNP concentration (neutrons/m^3)
λ_i	Decay constant (1/s)
χ_i^g	probability of delayed neutron born in g
β_i	fraction of neutrons born delayed

$$\beta_{eff} = \sum_{i=1}^{6} \beta_i$$

The TRITON/NEWT sequence in SCALE is used to calculate nuclear data.

- 2-D neutron discrete-ordinates code
- Provides a solution for multigroup transport calculations
- Calculates the spatial flux distribution and prepares collapsed cross sections

3-group #	238-group #	Lower Energy
1	44	100 keV
2	199	0.625 eV
3	238	10 μeV

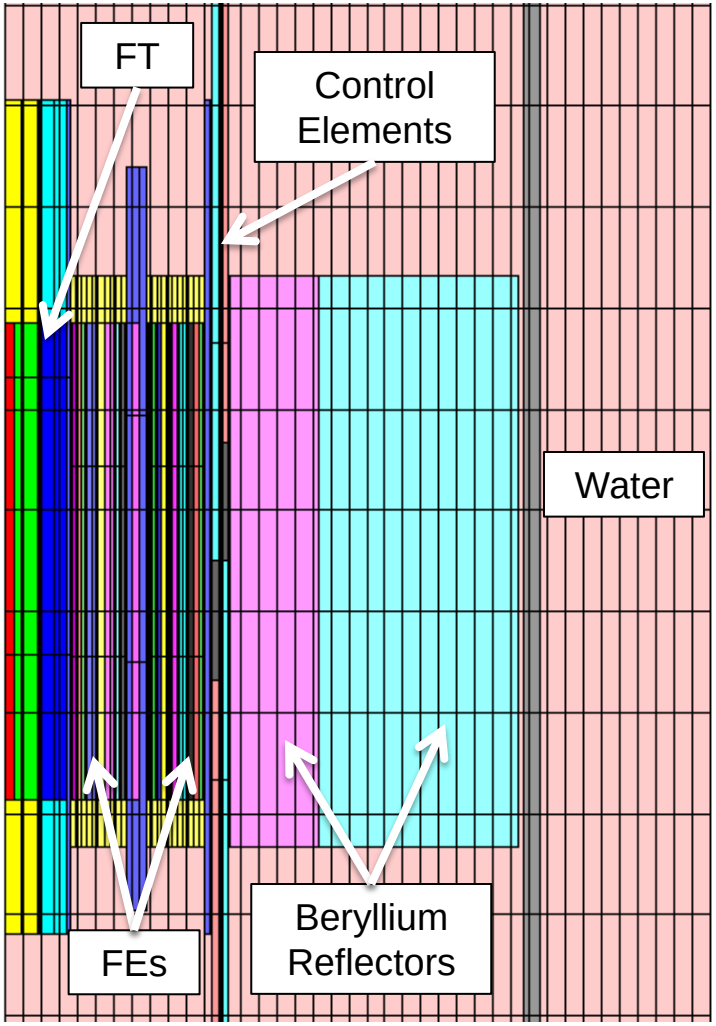

NEWT input modified from the model documented in:
Dr. G. Ilas, et. al., New Cross Section Processing Methodology for HFIR Core Analysis, PHYSOR-2008, Interlaken, Switzerland, Sep. 2008.

If the control cylinder is ejected, positive reactivity would be inserted; thus, giving rise to a power transient.

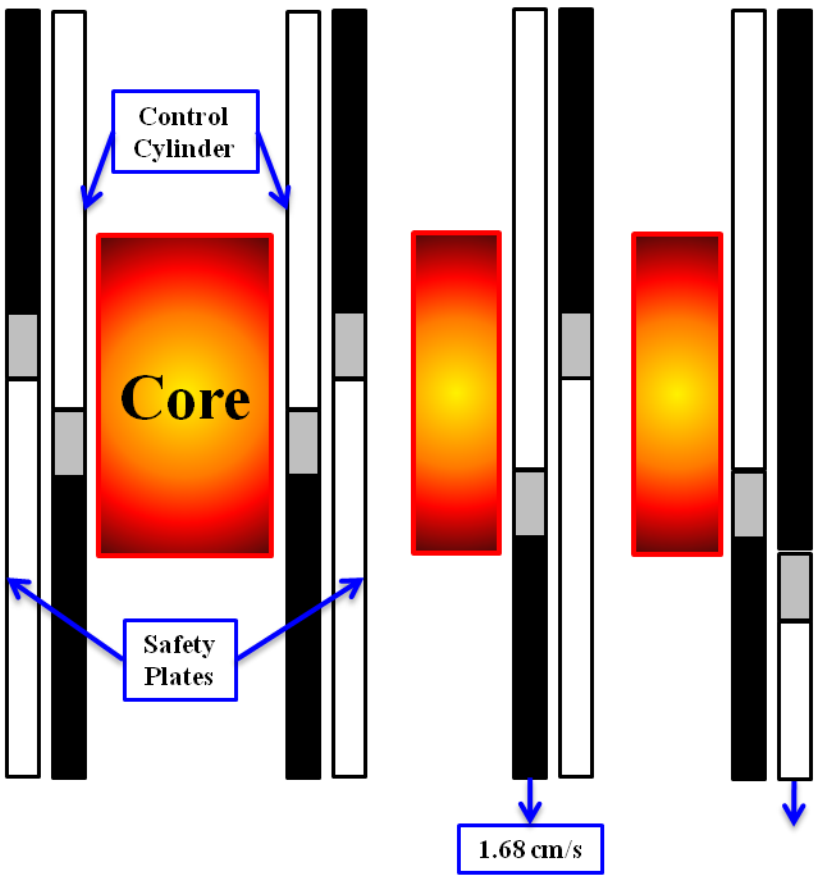

- **Transient initiated by a control cylinder ejection**
  - v_{cc} = -1.68 cm/s (-0.662 in/s)
- **Initial reactor power = 1 kW**
  - Zero power condition (lowest critical power and worst case scenario)
- **Power scram set point = 5.001 MW**
- **Safety plate response time = 10 ms**

$$\frac{d^2\Delta z_{sp}(t)}{dt^2} = -\left[4g - 19.7g\Delta z_{oce}\right]\frac{m}{s^2},\ for\ a \geq g$$

$$otherwise,\quad \frac{d^2\Delta z_{sp}(t)}{dt^2} = -g\left(\frac{m}{s^2}\right)$$

Three study steps are solved in sequential order.

1. Eigenvalue study

- Good spatially-dependent solution, but normalized to maximum value
- Solution used as the initial values (starting guesses) for study step 2

2. Stationary study

- Set up constraint (ODE) to normalize fluxes and determine k_{eff}

$$k_{eff}: \left(\iiint_V \sum_{g=1}^{3} \kappa \Sigma_f^g \phi^g \, dV \right) - P_o = 0 \qquad (\kappa \approx 3.1\text{x}10^{-11} \text{ J/fission})$$

- Solution used as initial values for study step 3

3. Time-dependent study

- Define moving interfaces, i.e. $Z_{gib}(t)$=-2.54[cm]-1.68[cm/s]*t[s]
- Assign axially-dependent properties (cross sections) to simulate control element movement, i.e. if(z<Z_{gib},Σ_{bi},if(z<Z_{git},Σ_{gi},Σ_{wi}))
- Smoothing functions applied to transitions from high absorption to low absorption, i.e. flc2hs(z–z_2,scale)
- Track power as a function of time $$P(W) = \iiint_V \sum_{g=1}^{3} \left(k^g \Sigma_f^g \phi^g \right) dV$$

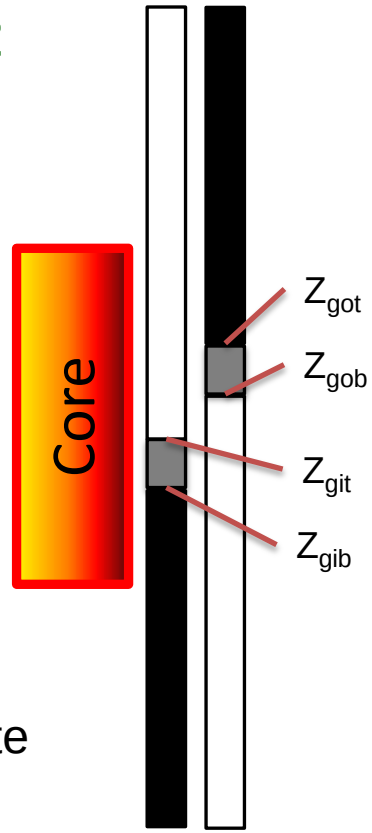

2-D axisymmetric geometry and vacuum boundary conditions are utilized.

$$\left.\begin{aligned} \mathbf{n}\cdot(c\nabla u+\alpha u-\gamma)+qu &= g-h^T\mu \\ hu &= r \end{aligned}\right\}$$

on boundary (dΩ)

- Symmetry BC defined at the axial centerline
- Vacuum BCs defined at the 3 outer pool boundaries
- Continuity BCs defined for all interior boundary interfaces

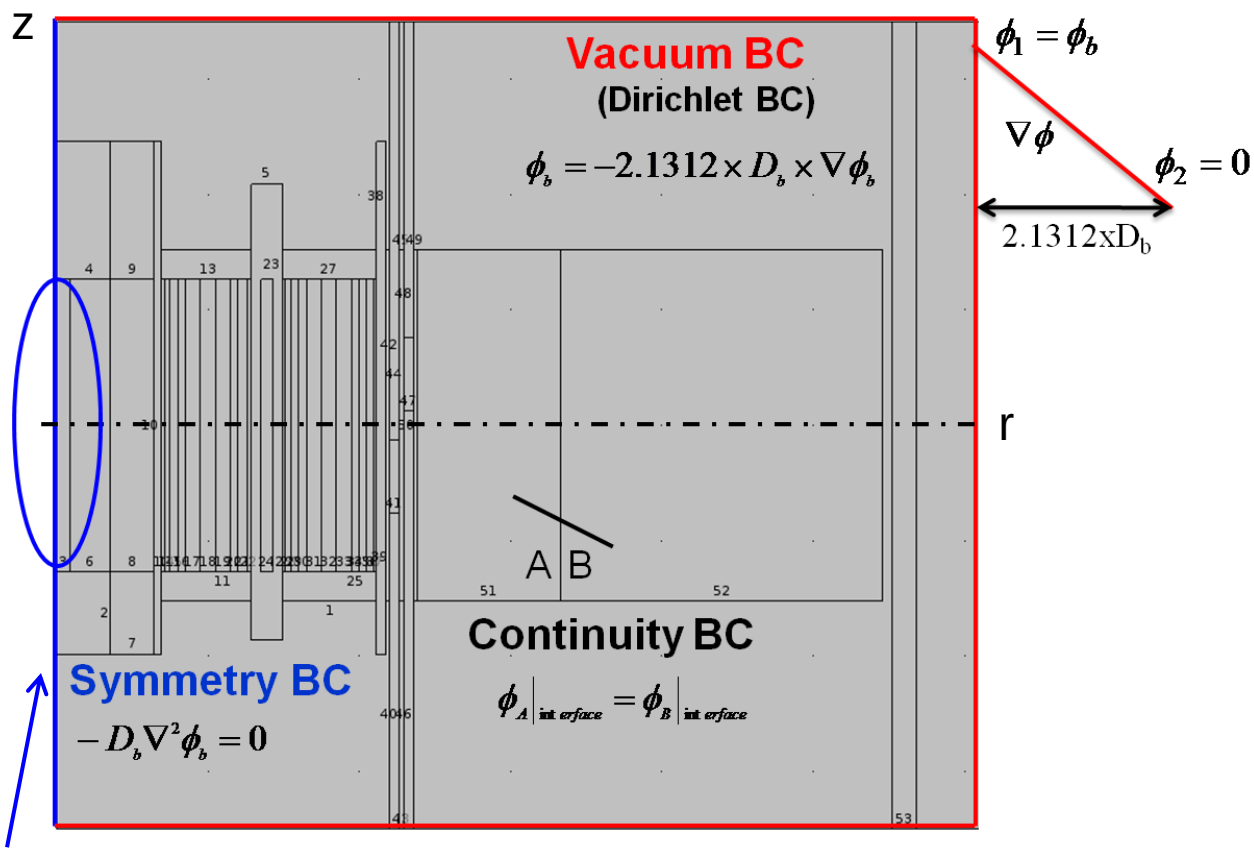

core axial centerline.

COMSOL's built-in mesh generator used to discretize the geometry and Direct solvers are utilized.

- Mapped mesh in moving domains
- Boundary layers in narrow domains located near steep flux gradients
- Free triangular mesh elsewhere
  - "Extremely fine" in core region (+refinements)
  - "Extra fine" in pool water outside of Be reflector
- Each model set up with ~100-150k elements
  - ~1-2 million DOF → 24 hr solution time
  - 3 compute nodes, dual quad core processors, 64 GB RAM
- PARDISO for stationary and eigenvalue
  - Efficient, but does not run in distributed parallel mode
- MUMPS for transient calculations
  - Less efficient, but runs in distributed parallel mode

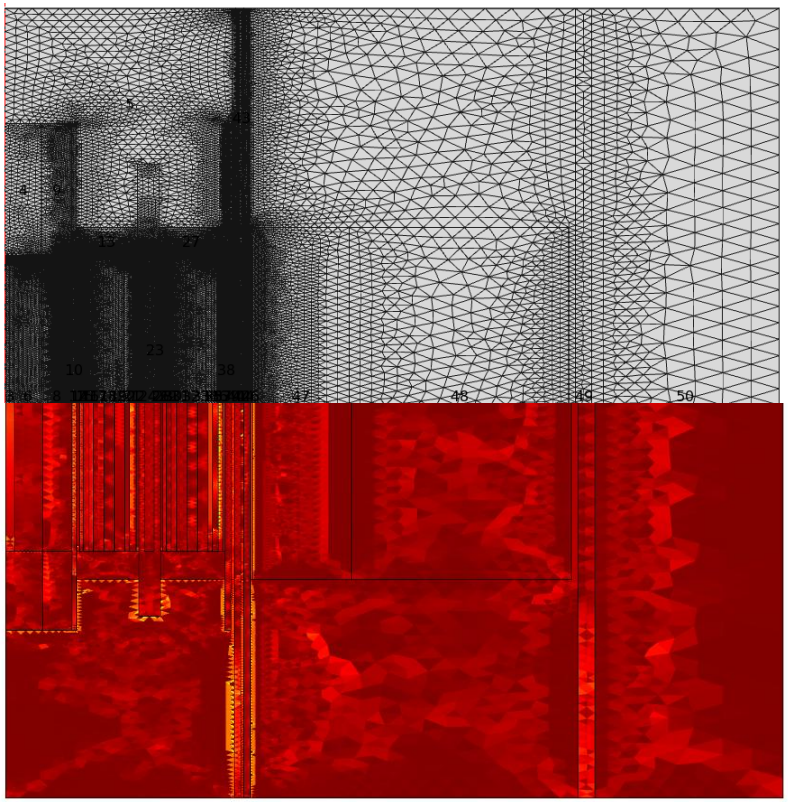

Beginning-of-cycle neutron fluxes.

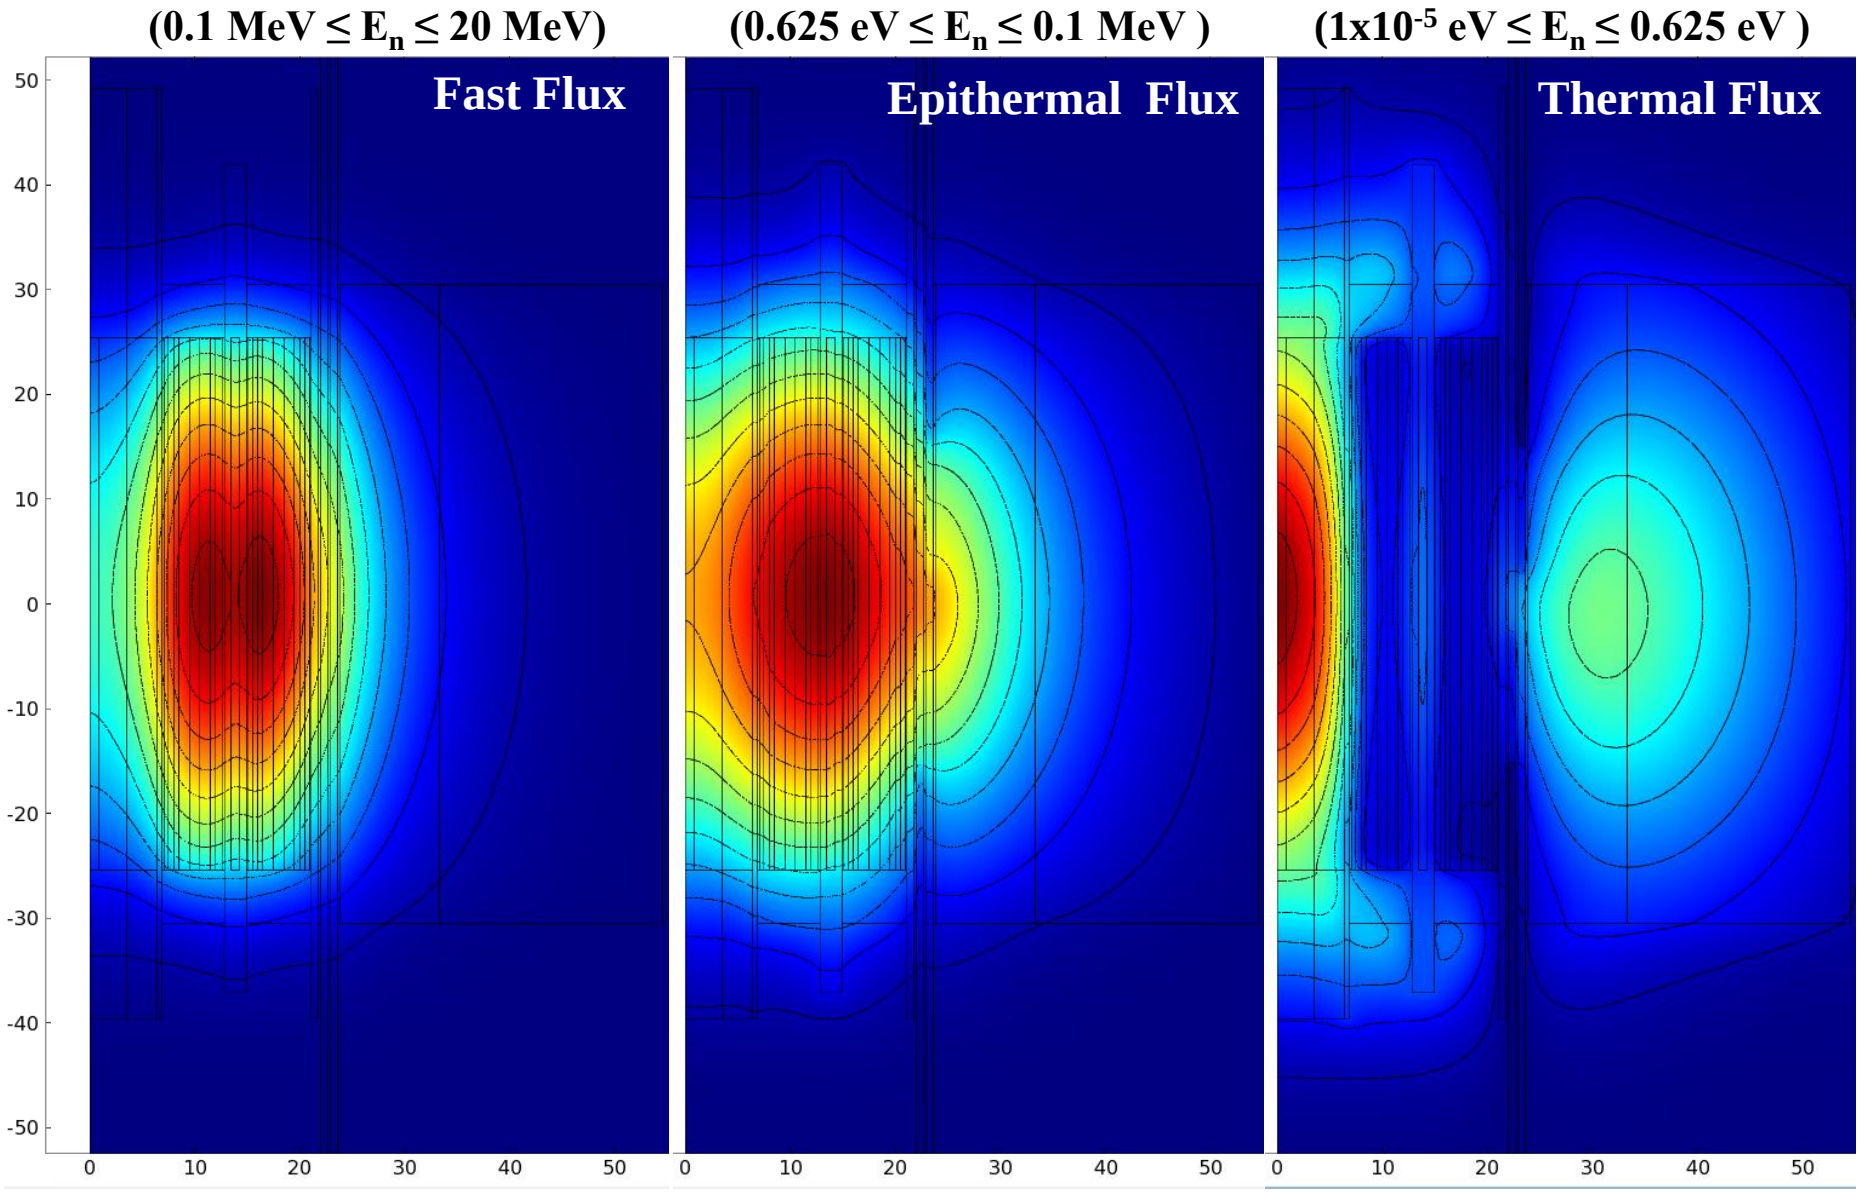

Power shifts to the OFE during control cylinder ejection and then back to IFE during safety plate insertion.

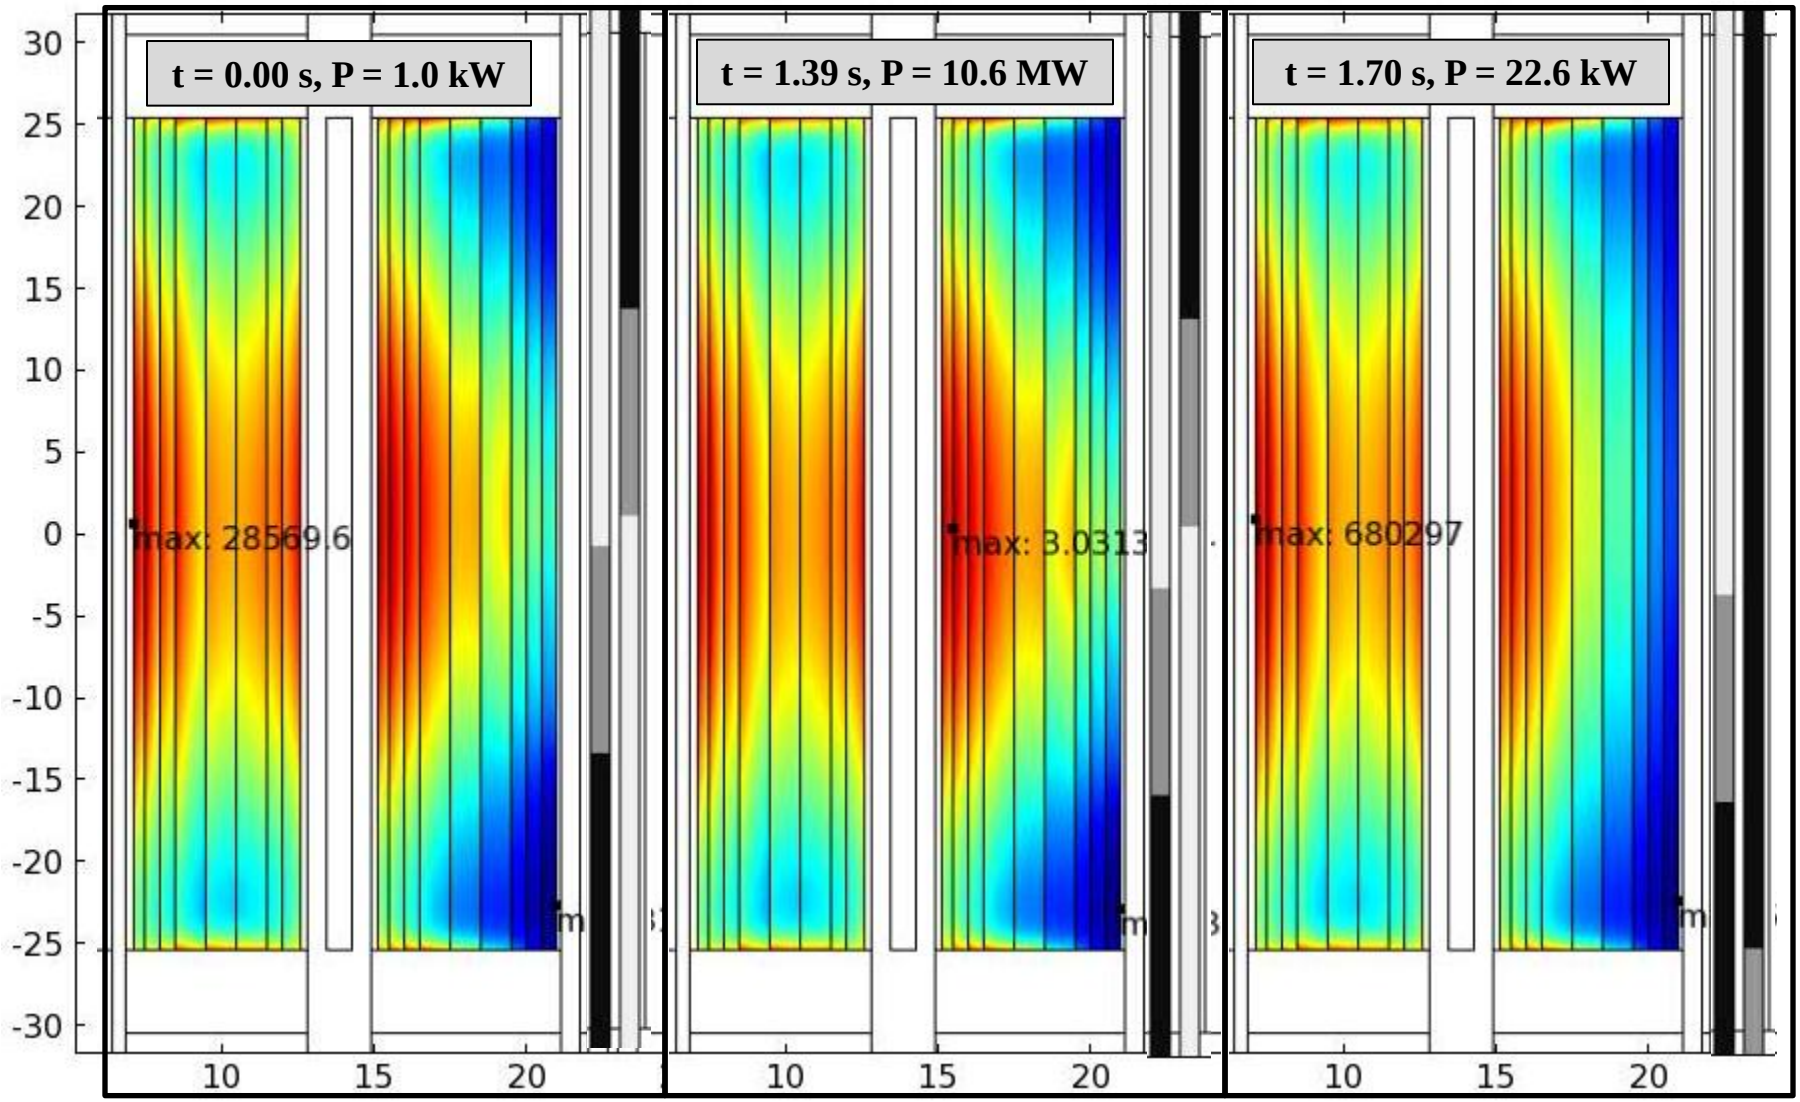

Summary and Conclusions

- **COMSOL-based neutron diffusion models of HFIR were created via equation-based modeling**
  - 3 neutron energy groups and 6 delayed neutron precursor groups
  - 2-D axisymmetric geometry
  - Nuclear data derived from TRITON/NEWT sequence in SCALE
- **New space-time (PDE and ODE modes) and point kinetics (ODE mode) methodologies were developed in COMSOL**
  - Point kinetics are much more computationally efficient and were shown to produce accurate results for small perturbations
- **Additional results and methods documented in full length paper**
- **COMSOL is also being used at the HFIR for thermal hydraulic and structural analyses**