

Neutron Activation Foil and Thermoluminescent Dosimeter Responses to a Bare Pulse of the CEA Valduc SILENE Critical Assembly



Approved for public release.
Distribution is unlimited.

Thomas M. Miller
Cihangir Celik
Kimberly L. McMahan
Yi-Kang Lee
Emmanuel Gagnier
Nicolas Authier
Jérôme Piot
Xavier Jacquet
Guillaume Rousseau
Kevin H. Reynolds

September 2016

**NEA/NSC/DOC(95)03/VIII
Volume VIII**

ALARM-TRAN-AIR-SHIELD-001

DOCUMENT AVAILABILITY

Reports produced after January 1, 1996, are generally available free via US Department of Energy (DOE) SciTech Connect.

Website <http://www.osti.gov/scitech/>

Reports produced before January 1, 1996, may be purchased by members of the public from the following source:

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
Telephone 703-605-6000 (1-800-553-6847)
TDD 703-487-4639
Fax 703-605-6900
E-mail info@ntis.gov
Website <http://www.ntis.gov/help/ordermethods.aspx>

Reports are available to DOE employees, DOE contractors, Energy Technology Data Exchange representatives, and International Nuclear Information System representatives from the following source:

Office of Scientific and Technical Information
PO Box 62
Oak Ridge, TN 37831
Telephone 865-576-8401
Fax 865-576-5728
E-mail reports@osti.gov
Website <http://www.osti.gov/contact.html>

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

ALARM-TRAN-AIR-SHIELD-001

CONTENTS

LIST OF FIGURES.....	vii
LIST OF TABLES	xi
1.0 DETAILED DESCRIPTION	1
1.1 Overview of Experiment	1
1.2 Description of Experimental Configuration	2
1.2.1 SILENE Room.....	4
1.2.2 Collimator Boxes	8
1.2.3 Collimator B Shielding	22
1.2.4 Foil Holders.....	25
1.2.5 Free Field Location.....	27
1.2.6 Scattering Box	31
1.2.7 Scattering Box Detector Mounting Plate	39
1.2.8 SILENE Diagnostics.....	41
1.3 Description of Material Data	44
1.3.1 SILENE Room.....	44
1.3.2 Collimator Boxes	45
1.3.3 Collimator B Shielding	46
1.3.4 Foil Holders.....	47
1.3.5 Free Field Location.....	47
1.3.6 Scattering Box	48
1.3.7 Scattering Box Detector Mounting Plate	49
1.3.8 SILENE Diagnostics.....	49
1.4 Description of the Source	49
1.4.1 SILENE Dimensions.....	49
1.4.2 SILENE Materials	52
1.4.3 Uranyl Nitrate Solution	53
1.5 Description of the Detectors	54
1.5.1 Neutron Activation Foil Dimensions	54
1.5.2 Neutron Activation Foil Materials	55
1.5.3 TLD Dimensions	57
1.5.4 TLD Materials	58
1.5.5 Detector Locations and Configurations	58
1.6 Measurement Techniques	68
1.7 Measurement Results	70

ALARM-TRAN-AIR-SHIELD-001

2.0 EVALUATION OF EXPERIMENTAL DATA	74
2.1 Comparison and Initial Evaluation of the Experimentally Measured Data	74
2.1.1 Analysis of the Experiment 1 Measured Data	77
2.1.2 Analysis of the Experiment 1 Measured Data Uncertainties.....	77
2.2 Missing and Contradictory Data and Resolution of These Data.....	78
2.2.1 SILENE Room.....	78
2.2.2 Collimator Boxes	79
2.2.3 Free Field Location.....	79
2.2.4 Scattering Box Detector Mounting Plate	79
2.2.5 SILENE Diagnostics	79
2.2.6 Neutron Activation Foil	79
2.2.7 Concrete Data	79
2.2.8 Plastic Bags in the Scattering Box	81
2.3 Uncertainty of the SILENE Fission Source	81
2.3.1 Propagation of Fixed Source Uncertainties	82
2.3.2 Uranyl Nitrate Solution Isotopic Uncertainties	83
2.4 Experimental and Benchmark Model Parameter Uncertainties	84
2.4.1 Geometric Dimension Uncertainties	84
2.4.2 Material Density Uncertainties	84
2.4.3 Material Elemental Composition Uncertainties.....	85
2.4.4 Shielding Blocks Composition Uncertainties	85
2.4.5 Shielding Blocks Orientation Uncertainties	85
2.4.6 PPB9 Uncertainties	86
2.4.7 Uranyl Nitrate Solution Uncertainties.....	86
2.4.8 Neutron Activation Foils Uncertainties	87
2.5 Evaluation of the Experimental Data Uncertainties	87
2.5.1 Uncertainty Dependencies.....	88
2.5.2 Case 1 Collimator A Uncertainties	90
2.5.3 Case 2 Collimator B Uncertainties	91
2.5.4 Case 3 Free Field Location Uncertainties	92
2.5.6 Case 5 Scattering Box Position 2 Uncertainties	94
2.5.7 Case 6 Scattering Box Position 3 Uncertainties	95
3.0 BENCHMARK SPECIFICATIONS	97
3.1 Description of Model	97
3.1.1 Simplification: SILENE Room Details	98

ALARM-TRAN-AIR-SHIELD-001

3.1.2 Unquantifiable Simplifications	98
3.1.3 All Other Simplifications	99
3.2 Dimensions	99
3.2.1 SILENE Room.....	99
3.2.2 Collimator Boxes	104
3.2.3 Collimator B Shielding	108
3.2.4 Simplified Foil Holder Model	108
3.2.5 Free Field Location.....	110
3.2.6 Scattering Box	110
3.2.7 Scattering Box Detector Mounting Plate	115
3.2.8 SILENE Critical Assembly	116
3.2.9 Neutron Activation Foils	116
3.2.10 TLD.....	126
3.3 Material Data	127
3.3.1 SILENE Room.....	127
3.3.2 Collimator Boxes	128
3.3.3 Collimator B Shielding	129
3.3.4 Simplified Foil Holder	129
3.3.5 Free Field Location.....	129
3.3.6 Scattering Box	129
3.3.7 Scattering Box Detector Mounting Plate	130
3.3.8 SILENE Critical Assembly	130
3.3.9 Neutron Activation Foils	131
3.3.10 TLD.....	132
3.4 Source Strength and Spectra.....	133
3.4.1 Response Functions and Normalization.....	133
3.5 Experimental and Benchmark Model Neutron and Photon Data	134
4.0 RESULTS OF SAMPLE CALCULATIONS	137
4.1 Source Strength and Spectra.....	137
4.2 Response Functions and Normalization	140
4.2.1 Neutron Activation Foil Response Functions and Normalization	141
4.2.2 Photon TLD Dose Response Functions and Normalization	151
4.3 Prompt Response Simulation Results.....	152
4.4 Delayed Photon Response Simulation Results	160
5.0 REFERENCES.....	163

**NEA/NSC/DOC(95)03/VIII
Volume VIII**

ALARM-TRAN-AIR-SHIELD-001

APPENDIX A: TYPICAL INPUT LISTINGS.....	164
APPENDIX B: ADVANTG INPUT LISTINGS	167
APPENDIX C: SOURCE DISTRIBUTIONS	168
APPENDIX D: TLD PHOTON DOSE RESPONSE FUNCTION	210
APPENDIX E: GRAPHICAL COMPARISON BETWEEN CALCULATION AND EXPERIMENT	211
APPENDIX F: LEAKAGE RESULTS FROM SIMULATION.....	219
APPENDIX G: DISCUSSION OF CAAS DETECTOR PERFORMANCE	232
APPENDIX H: ADDITIONAL DOCUMENTATION OF EXPERIMENTAL DETAILS	249
APPENDIX I: UNCERTAINTY ANALYSIS DETAILS.....	263

ALARM-TRAN-AIR-SHIELD-001

LIST OF FIGURES

Figure		Page
Fig. 1-1.	Experimental setup.	3
Fig. 1-2.	Overview of experiment configuration with dimensions.	3
Fig. 1-3.	SILENE critical assembly room (dimensions in meters).	4
Fig. 1-4.	Details of crane supports in SILENE room (dimensions in meters).	5
Fig. 1-5.	SILENE room doors.	5
Fig. 1-6.	SILENE room shielding doors; view from hallway outside the room (dimensions in mm).	6
Fig. 1-7.	SILENE room shielding doors; view from the side (dimensions in mm).	7
Fig. 1-8.	Location of axis of SILENE in room (dimensions in meters).	8
Fig. 1-9.	Collimators A and B on their stands (without concrete shielding).	8
Fig. 1-10.	Isometric view of collimator and stand.	9
Fig. 1-11.	Front view of collimator and stand.	10
Fig. 1-12.	Side view of collimator and stand.	11
Fig. 1-13.	Detail of collimator guide on stand.	12
Fig. 1-14.	Cross section of collimator layers, front view.	13
Fig. 1-15.	Cross section of collimator layers, side view.	14
Fig. 1-16.	Isometric view of collimator inner stainless steel frame (thickness 5 mm).	15
Fig. 1-17.	Isometric View of collimator outer stainless steel layer (thickness 2 mm).	16
Fig. 1-18.	Detail of collimator activation foil holder support bar.	17
Fig. 1-19.	Detail of small support stand inside collimator.	17
Fig. 1-20.	Location of collimator A stand within the SILENE room.	19
Fig. 1-21.	Location of collimator B stand within the SILENE room.	20
Fig. 1-22.	Height of collimator A above SILENE room floor.	21
Fig. 1-23.	Height of collimator B above SILENE room floor.	22
Fig. 1-24.	Collimator B, barite concrete shield block, and 1 cm gap.	23
Fig. 1-25.	Concrete shield block.	23
Fig. 1-26.	Dimensions of concrete shield blocks (all dimensions are cm).	24
Fig. 1-27.	Dimensions of concrete shield block lift points.	24
Fig. 1-28.	Collimator foil holder with neutron activation foils.	25
Fig. 1-29.	Front of foil holder without front plate.	26
Fig. 1-30.	Back and side of foil holder.	26
Fig. 1-31.	Front of foil holder with front plate.	27
Fig. 1-32.	Free field location stand.	28
Fig. 1-33.	Front view of free field stand.	29
Fig. 1-34.	Isometric view of free field stanD.	30
Fig. 1-35.	Detail of free field stand support bar.	31
Fig. 1-36.	Front of scattering box (side nearest SILENE).	32
Fig. 1-37.	Back of scattering box.	32
Fig. 1-38.	Elevation view of the scattering box from the front (dimensions in mm).	33
Fig. 1-39.	Elevation view of the scattering box from the side nearest the free field location (dimensions in mm).	34
Fig. 1-40.	Plan view of scattering box (dimensions in mm).	35
Fig. 1-41.	Details of vertical support bars (dimensions in mm).	35
Fig. 1-42.	Location of scattering box and stand within SILENE room.	36

ALARM-TRAN-AIR-SHIELD-001

Fig. 1-43.	Height of scattering box above SILENE room floor	37
Fig. 1-44.	Gap between scattering box concrete blocks.....	37
Fig. 1-45.	Front of the scattering box with block names; gap dimensions in cm.	38
Fig. 1-46.	Back of scattering box with block names; gap dimensions in cm.	38
Fig. 1-47.	Drawing of side of scattering box with block names; gap dimensions in cm.	39
Fig. 1-48.	Scattering box aluminum mounting plate.	39
Fig. 1-49.	Details of scattering box aluminum mounting plates.....	40
Fig. 1-50.	Plates mounted in the scattering box.	41
Fig. 1-51.	Detector diagnostics and stands.....	42
Fig. 1-52.	Dimensions in cm of detector diagnostics and stands.....	43
Fig. 1-53.	Location of detector diagnostics and stands within SILENE room.	43
Fig. 1-54.	Bare SILENE.....	50
Fig. 1-55.	Simplified SILENE geometry.	51
Fig. 1-56.	SILENE Lower Lead Ring.	52
Fig. 1-57.	Valduc Al ₂ O ₃ TLD container.	57
Fig. 1-58.	Collimator A detector configuration.	59
Fig. 1-59.	Detector locations within collimator A.	59
Fig. 1-60.	Collimator B detector configuration.	60
Fig. 1-61.	Detector locations within collimator B.	60
Fig. 1-62.	Free field detector configuration.	61
Fig. 1-63.	Detector locations on the free field stand.	61
Fig. 1-64.	Detail of the free field neutron activation foil holder.	62
Fig. 1-65.	Scattering box position 1 dimensions.	63
Fig. 1-66.	Scattering box position 2 dimensions.	63
Fig. 1-67.	Scattering box position 3 dimensions.	64
Fig. 1-68.	Scattering box position 4 dimensions.	64
Fig. 1-69.	Detectors at scattering box position 1.....	65
Fig. 1-70.	Location of detectors on scattering box position 1 mounting plate.	65
Fig. 1-71.	Detectors at scattering box position 2.....	66
Fig. 1-72.	Location of Detectors on Scattering Box Position 2 Mounting Plate.	66
Fig. 1-73.	Detectors at scattering box positions 3 and 4.	67
Fig. 1-74.	Location of detectors on scattering box positions 3 and 4 mounting plate.	67
Fig. 1-75.	Fission rate as a function of time.	70
Fig. 3-1.	Benchmark model overview.....	97
Fig. 3-2.	XY View of the SILENE room.	100
Fig. 3-3.	XZ view of the SILENE room.....	100
Fig. 3-4.	YZ view of the SILENE room.....	101
Fig. 3-5.	XY view of the SILENE room doors and hall.....	102
Fig. 3-6.	XZ view of the SILENE room doors and hall.	103
Fig. 3-7.	SILENE location in benchmark model.	103
Fig. 3-8.	Overall collimator model with internal cavity.....	104
Fig. 3-9.	Internal material layers of collimator model (blue indicates air).	104
Fig. 3-10.	Collimator stainless steel frame.	105
Fig. 3-11.	External stainless steel layer attached to the stainless steel frame.	105
Fig. 3-12.	XZ View of the collimator stand.	106
Fig. 3-13.	YZ view of the collimator stand (left looking towards SILENE [-x];	106
Fig. 3-14.	XY View of the collimator stand.	107
Fig. 3-15.	Location of the collimator stands, collimators, and collimator B shielding.	107

ALARM-TRAN-AIR-SHIELD-001

Fig. 3-16.	Concrete shield block model.	108
Fig. 3-17.	XZ view of the foil holder modeL.	109
Fig. 3-18.	YZ view of the foil holder model.	109
Fig. 3-19.	XY view of the foil holder model.	110
Fig. 3-20.	Scattering box benchmark model overview.	111
Fig. 3-21.	XZ View of the scattering box support stand.	112
Fig. 3-22.	YZ View of the scattering box support stand.	112
Fig. 3-23.	XY View of the scattering box support stand.	113
Fig. 3-24.	Location of the scattering box on the support stand and the support stand within the SILENE room.	114
Fig. 3-25.	Dimensions of the scattering box mounting plates.	115
Fig. 3-26.	Configuration of the scattering box mount.	115
Fig. 3-27.	SILENE assembly benchmark model dimensions.	116
Fig. 3-28.	Example of a benchmark model neutron activation foil.	116
Fig. 3-29.	YZ view of neutron activation foils within the foil holderS.	118
Fig. 3-30.	XZ view of the neutron activation foils within the foil holders.	119
Fig. 3-31.	Elevation view of the foil holder within the collimators.	120
Fig. 3-32.	Plan view of the foil holder within the collimators.	120
Fig. 3-33.	Elevation view of the foil holder at the free field location.	121
Fig. 3-34.	Plan view of the foil holder at the free field location.	121
Fig. 3-35.	Sketch to help locate the free field location (not to scale).	122
Fig. 3-36.	Scattering box position 1 (SB1) detector configuration.	123
Fig. 3-37.	Scattering box position 2 (SB2) detector configuration.	124
Fig. 3-38.	Scattering box position 3 (SB3) detector configuration.	125
Fig. 3-39.	Scattering box position 4 (SB4) detector configuration.	126
Fig. 3-40.	Al_2O_3 TLD benchmark model.	126
Fig. 4-1.	SILENE pulse 1 energy distribution of fission neutrons calculated with MCNP6 using ENDF/B-VII.1 cross section data (.80c).	138
Fig. 4-2.	SILENE pulse 1 axial distribution of fission neutrons calculated with MCNP6 using ENDF/B-VII.1 cross section data (.80c).	139
Fig. 4-3.	Select SILENE pulse 1 radial distributions of fission neutrons calculated with MCNP6 using ENDF/B-VII.1 cross section data (.80c).	140
Fig. 4-4.	^{59}Co (n,γ) cross section from MCNP ENDF/B-VII.1 (.80c).	141
Fig. 4-5.	^{197}Au (n,γ) cross section from MCNP ENDF/B-VII.1 (.80c).	142
Fig. 4-6.	^{115}In (n,γ) cross section from IRDF-2002 (.34y).	143
Fig. 4-7.	^{55}Mn (n,γ) cross section from MCNP ENDF/B-VII.1 (.80c).	144
Fig. 4-8.	^{54}Fe (n,p) cross section from MCNP ENDF/B-VII.1 (.80c).	145
Fig. 4-9.	^{56}Fe (n,p) cross section From MCNP ENDF/B-VII.1 (.80c).	146
Fig. 4-10.	^{24}Mg (n,p) cross section from MCNP ENDF/B-VII.1 (.80c).	147
Fig. 4-11.	^{58}Ni (n,p) cross section from MCNP ENDF/B-VII.1 (.80c).	148
Fig. 4-12.	^{115}In ($n,n'\gamma$) cross section from IRDF-2002 (.34y).	149
Fig. 4-13.	ICRU-57 air kerma response function taken from SCALE 6.2, but using modified upper and lower energy boundaries.	151
Fig. E-1.	Case 1 collimator A neutron activation foil code-to-code comparison of c/e ratios with 2-sigma error bars.	211
Fig. E-2.	Case 2 collimator B neutron activation foil code-to-code comparison of C/E ratios with 2-sigma error bars.	212

ALARM-TRAN-AIR-SHIELD-001

Fig. E-3.	Case 3 free field location neutron activation foil code-to-code comparison of C/E ratios with 2-sigma error bars.....	213
Fig. E-4.	Case 4 scattering box position 1 neutron activation foil code-to-code comparison of C/E ratios with 2-sigma error bars.....	214
Fig. E-5.	Case 5 scattering box position 2 neutron activation foil code-to-code comparison of C/E ratios with 2-sigma error bars.....	215
Fig. E-6.	Case 6 scattering box position 3 neutron activation foil code-to-code comparison of C/E Ratios with 2-sigma error bars.....	216
Fig. E-7.	Case 7 scattering box position 4 neutron activation foil code-to-code comparison of C/E ratios with 2-sigma error bars.....	217
Fig. E-8.	All Al ₂ O ₃ TLD code-to-code comparison of C/E ratios with 2-sigma error bars (all cases).....	218
Fig. F-1.	Neutron leakage from SILENE fuel solution calculated with MCNP6 using ENDF/B-VII.1 cross section data (.80c).....	219
Fig. F-2.	Photon leakage from SILENE fuel solution calculated with MCNP6 using ENDF/B-VII.1 neutron cross section data (.80c and .04p).....	220
Fig. I-1.	Cobalt Activity vs. SILENE Reactor Steel Density (2-sigma error bars).....	264
Fig. I-2.	Cobalt Activity vs. Cr Weight Fraction of SILENE Reactor Steel (2-sigma error bars).....	265

ALARM-TRAN-AIR-SHIELD-001

LIST OF TABLES

Table	Page	
Table 1-1.	SILENE concrete composition	44
Table 1-2.	Standard composition of S235JR steel.....	45
Table 1-3.	Composition of Z2 CN 18-10 stainless steel for the collimator boxes	45
Table 1-4.	PPB9 composition after drying	46
Table 1-5.	Barite concrete composition according to LERM analysis and density according to the manufacturer Soutrenon	47
Table 1-6.	Standard composition of AG3M aluminum	47
Table 1-7.	Magnetite concrete composition according to LERM analysis and density according to the manufacturer Soutrenon	48
Table 1-8.	Standard concrete composition according to LERM analysis and density according to the manufacturer Soutrenon	49
Table 1-9.	Standard composition of Z2 CN 18-10 stainless steel	52
Table 1-10.	Standard composition of A42 steel	52
Table 1-11.	Analysis of alduc high purity lead	53
Table 1-12.	Isotopic composition of uranyl nitrate solution in 1999	53
Table 1-13.	Results of the September 8, 2010 uranyl nitrate solution analysis	54
Table 1-14.	Dimensions and masses of neutron activation foils	55
Table 1-15.	Results of Goodfellow [1] chemical analysis	56
Table 1-16.	Results of Goodfellow [2] chemical analysis	56
Table 1-17.	Results of Goodfellow [4] chemical analysis	56
Table 1-18.	Results of FILAB [1] chemical analysis	56
Table 1-19.	Results of FILAB [2] chemical analysis	56
Table 1-20.	Results of FILAB [3] chemical analysis	56
Table 1-21.	Results of FILAB [4] chemical analysis	56
Table 1-22.	Results of FILAB [5] chemical analysis	57
Table 1-23.	Results of FILAB [6] chemical analysis	57
Table 1-24.	Standard composition of AU4G aluminum alloy	58
Table 1-25.	Neutron activation foils and measured activation products(a)	69
Table 1-26.	Neutron activation foils measurement results	72
Table 1-27.	TLD Dose Measurement Results	73
Table 2-1.	Comparison of $^{197}\text{Au}(n,\gamma)^{198}\text{Au}$ reaction data	75
Table 2-2.	Comparison of $^{59}\text{Co}(n,\gamma)^{60}\text{Co}$ reaction data	75
Table 2-3.	Comparison of $^{115}\text{In}(n,\gamma)^{116}\text{In}$ reaction data	75
Table 2-4.	Comparison of $^{56}\text{Fe}(n,p)^{56}\text{Mn} + ^{55}\text{Mn}(n,\gamma)^{56}\text{Mn}$ reaction data	75
Table 2-5.	Comparison of $^{58}\text{Ni}(n,p)^{58}\text{Co}$ reaction data	76
Table 2-6.	Comparison of $^{115}\text{In}(n,n'\gamma)^{115m}\text{In}$ reaction data	76
Table 2-7.	Comparison of $^{54}\text{Fe}(n,p)^{54}\text{Mn}$ reaction data	76
Table 2-8.	Comparison of $^{24}\text{Mg}(n,p)^{24}\text{Na}$ reaction data	76
Table 2-9.	Comparison of Al_2O_3 doses	76
Table 2-10.	Comparison of HBG doses	76
Table 2-11.	Comparison of DXT doses	77
Table 2-12.	SILENE room air composition	78
Table 2-13.	Sensitivity / uncertainty dependency table	89

ALARM-TRAN-AIR-SHIELD-001

Table 2-14.	Case 1 collimator A detector total experimental uncertainties	91
Table 2-15.	Case 2 collimator B detector total experimental uncertainties	92
Table 2-16.	Case 3 free field location detector total experimental uncertainties	93
Table 2-17.	Case 4 scattering box position 1 detector total experimental uncertainties	94
Table 2-18.	Case 5 scattering box position 2 detector total experimental uncertainties	95
Table 2-19.	Case 6 scattering box position 3 detector total experimental uncertainties	95
Table 2-20.	Case 7 scattering box position 4 detector total experimental uncertainties	96
Table 3-1.	Scattering box benchmark model gaps	111
Table 3-2.	Thickness of each benchmark model neutron activation foil	117
Table 3-3.	SILENE concrete benchmark model number densities	127
Table 3-4.	SILENE air benchmark model number densities	127
Table 3-5.	Steel S235JR (low carbon steel) benchmark model number densities	128
Table 3-6.	Collimator box Z2 CN 18-10 stainless steel benchmark model number densities	128
Table 3-7.	Collimator box copper benchmark model number densities	128
Table 3-8.	Collimator box lead benchmark model number densities	128
Table 3-9.	Collimator box PPB9 benchmark model number densities	128
Table 3-10.	Barite concrete benchmark model number densities	129
Table 3-11.	AG3M aluminum alloy benchmark model number densities	129
Table 3-12.	Magnetite concrete benchmark model number densities	130
Table 3-13.	Standard concrete benchmark model number densities	130
Table 3-14.	Aluminum benchmark model number densities	130
Table 3-15.	Standard composition Z2 CN 18-10 benchmark model number densities	130
Table 3-16.	Natural cadmium benchmark model number densities	130
Table 3-17.	A42 steel benchmark model number densities	131
Table 3-18.	Lower lead ring benchmark model number densities	131
Table 3-19.	Uranyl nitrate benchmark model number densities	131
Table 3-20.	Collimator A neutron activation foil benchmark model number densities	131
Table 3-21.	Collimator B neutron activation foil benchmark model number densities	132
Table 3-22.	Free field neutron activation foil benchmark model number densities	132
Table 3-23.	Scattering box 1 neutron activation foil benchmark model number densities	132
Table 3-24.	Scattering box 2 neutron activation foil benchmark model number densities	132
Table 3-25.	Scattering box 3 neutron activation foil benchmark model number densities	132
Table 3-26.	Scattering box 4 neutron activation foil benchmark model number densities	132
Table 3-27.	AU4G aluminum alloy benchmark model number densities	133
Table 3-28.	Al ₂ O ₃ TLD powder benchmark model number densities	133
Table 3-29.	Benchmark neutron activation foil data	135
Table 3-30.	Benchmark TLD dose data	136
Table 4-1.	Case 1 collimator A complete tally normalization for neutron activation products	150
Table 4-2.	Case 2 collimator B complete tally normalization for neutron activation products	150
Table 4-3.	Case 3 free field complete tally normalization for neutron activation products	150
Table 4-4.	Case 4 scattering box 1 complete tally normalization for neutron activation products ..	150
Table 4-5.	Case 5 scattering box 2 complete tally normalization for neutron activation products ..	150
Table 4-6.	Case 6 scattering box 3 complete tally normalization for neutron activation products ..	150
Table 4-7.	Case 7 scattering box 4 complete tally	150
Table 4-8.	Sample neutron activation calculation results with MCNP6 ENDF/B-VII.1 (US) ..	153
Table 4-9.	Sample TLD dose calculation results with MCNP6 ENDF/B-VII.1 (US) ..	154
Table 4-10.	Sample neutron activation calculation results with SCALE 6.2 ENDF/B-VII.1 (US) ...	155

ALARM-TRAN-AIR-SHIELD-001

Table 4-11.	Sample TLD dose calculation results with SCALE 6.2 ENDF/B-VII.1 (US).....	156
Table 4-12.	Sample neutron activation calculation results with TRIPOLI-4 JEFF-3.1.1 (CEA-V.5.1.1, France)	157
Table 4-13.	Sample TLD dose calculation results with TRIPOLI-4 JEFF-3.1.1 (CEA-V.5.1.1, France)	158
Table 4-14.	Sample neutron activation calculation results with COG 11.1 ENDF/B-VII.1 (US)	159
Table 4-15.	Sample TLD dose calculation results with COG 11.1 ENDF/B-VII.1 (US).....	160
Table 4-16.	Collimator A TLD absorbed dose (Gy) due to delayed fission and activation gammas	161
Table 4-17.	COG TLD doses with delayed fission photons	162
Table A-1.	Links to MCNP6 input and weight window files	165
Table A-2.	Links to SCALE 6.2 input and weight window files	166
Table B-1.	Links to ADVANTG and MCNP5 input files	167
Table C-1.	Energy distribution of fission neutrons (cont).....	168
Table C-2.	Axial distribution of fission neutrons	174
Table C-3.	Radial distributions of fission neutrons (cont)	175
Table D-1.	Benchmark model representation of the ICRU-57 air kerma flux-to-dose conversion factors	210
Table F-1.	Neutron Leakage from SILENE Fuel Solution and Relative Errors.....	220
Table F-2.	Photon Leakage from SILENE Fuel Solution and Relative Errors	227
Table I-1.	Results of Steel Density Perturbation Simulations	264
Table I-2.	Results of Steel Cr Weight Fraction Perturbation Simulations	265
Table I-3.	Case 1 Collimator A $^{59}\text{Co}(n,\gamma)^{60}\text{Co}$ Experimental Uncertainties.....	266
Table I-4.	Case 1 Collimator A $^{115}\text{In}(n,\gamma)^{116}\text{In}$ Experimental Uncertainties	267
Table I-5.	Case 1 Collimator A $^{115}\text{In}(n,n'\gamma)^{115m}\text{In}$ Experimental Uncertainties	268
Table I-6.	Case 1 Collimator A $^{54}\text{Fe}(n,p)^{54}\text{Mn}$ Experimental Uncertainties	269
Table I-7.	Case 1 Collimator A $^{56}\text{Fe}(n,p)^{56}\text{Mn} + ^{55}\text{Mn}(n,\gamma)^{56}\text{Mn}$ Experimental Uncertainties.....	270
Table I-8.	Case 1 Collimator A $^{24}\text{Mg}(n,p)^{24}\text{Na}$ Experimental Uncertainties.....	271
Table I-9.	Case 1 Collimator A $^{58}\text{Ni}(n,p)^{58}\text{Co}$ Experimental Uncertainties	272
Table I-10.	Case 1 Collimator A Al_2O_3 TLD Experimental Uncertainties	273
Table I-11.	Case 2 Collimator B $^{59}\text{Co}(n,\gamma)^{60}\text{Co}$ Experimental Uncertainties	274
Table I-12.	Case 2 Collimator B $^{197}\text{Au}(n,\gamma)^{198}\text{Au}$ Experimental Uncertainties	275
Table I-13.	Case 2 Collimator B $^{115}\text{In}(n,\gamma)^{116}\text{In}$ Experimental Uncertainties	276
Table I-14.	Case 2 Collimator B $^{115}\text{In}(n,n'\gamma)^{115m}\text{In}$ Experimental Uncertainties	277
Table I-15.	Case 2 Collimator B $^{54}\text{Fe}(n,p)^{54}\text{Mn}$ Experimental Uncertainties	278
Table I-16.	Case 2 Collimator B $^{56}\text{Fe}(n,p)^{56}\text{Mn} + ^{55}\text{Mn}(n,\gamma)^{56}\text{Mn}$ Experimental Uncertainties.....	279
Table I-17.	Case 2 Collimator B $^{24}\text{Mg}(n,p)^{24}\text{Na}$ Experimental Uncertainties	280
Table I-18.	Case 2 Collimator B $^{58}\text{Ni}(n,p)^{58}\text{Co}$ Experimental Uncertainties	281
Table I-19.	Case 2 Collimator B Al_2O_3 TLD Experimental Uncertainties	282
Table I-20.	Case 3 Free Field $^{59}\text{Co}(n,\gamma)^{60}\text{Co}$ Experimental Uncertainties	283
Table I-21.	Case 3 Free Field $^{197}\text{Au}(n,\gamma)^{198}\text{Au}$ Experimental Uncertainties	284
Table I-22.	Case 3 Free Field $^{115}\text{In}(n,\gamma)^{116}\text{In}$ Experimental Uncertainties	285
Table I-23.	Case 3 Free Field $^{115}\text{In}(n,n'\gamma)^{115m}\text{In}$ Experimental Uncertainties	286
Table I-24.	Case 3 Free Field $^{54}\text{Fe}(n,p)^{54}\text{Mn}$ Experimental Uncertainties	287

ALARM-TRAN-AIR-SHIELD-001

Table I-25.	Case 3 Free Field $^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} + ^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$ Experimental Uncertainties	288
Table I-26.	Case 3 Free Field $^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$ Experimental Uncertainties	289
Table I-27.	Case 3 Free Field $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ Experimental Uncertainties	290
Table I-28.	Case 3 Free Field Al_2O_3 TLD Experimental Uncertainties	291
Table I-29.	Case 4 Scattering Box 1 $^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$ Experimental Uncertainties	292
Table I-30.	Case 4 scattering box 1 $^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$ experimental uncertainties	293
Table I-31.	Case 4 scattering box 1 $^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$ experimental uncertainties	294
Table I-32.	Case 4 scattering box 1 $^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$ experimental uncertainties	295
Table I-33.	Case 4 scattering box 1 $^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$ experimental uncertainties.....	296
Table I-34.	Case 4 scattering box 1 $^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} + ^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$ experimental uncertainties	297
Table I-35.	Case 4 scattering box 1 $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ experimental uncertainties	298
Table I-36.	Case 4 scattering box 1 Al_2O_3 TLD experimental uncertainties.....	299
Table I-37.	Case 5 scattering box 2 $^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$ experimental uncertainties	300
Table I-38.	Case 5 scattering box 2 $^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$ experimental uncertainties	301
Table I-39.	Case 5 scattering box 2 $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ experimental uncertainties	302
Table I-40.	Case 5 scattering box 2 Al_2O_3 TLD experimental uncertainties.....	303
Table I-41.	Case 6 scattering box 3 $^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$ experimental uncertainties	304
Table I-42.	Case 6 scattering box 3 $^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$ experimental uncertainties	305
Table I-43.	Case 6 scattering box 3 $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ experimental uncertainties	306
Table I-44.	Case 6 scattering box 3 Al_2O_3 TLD experimental uncertainties.....	307
Table I-45.	Case 7 scattering box 4 $^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$ experimental uncertainties	308
Table I-46.	Case 7 scattering box 4 $^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$ experimental uncertainties	309
Table I-47.	Case 7 scattering box 4 $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ experimental uncertainties	310
Table I-48.	Case 7 scattering box 4 Al_2O_3 TLD experimental uncertainties.....	311

ALARM-TRAN-AIR-SHIELD-001

**NEUTRON ACTIVATION FOIL AND THERMOLUMINESCENT DOSIMETER
RESPONSES TO A BARE PULSE OF THE CEA VALDUC SILENE
CRITICAL ASSEMBLY**

Evaluators

Thomas M. Miller
Cihangir Celik
Kimberly L. McMahan
Oak Ridge National Laboratory

Yi-Kang Lee
Emmanuel Gagnier
Commissariat à l'Énergie Atomique et aux Énergies Alternatives, Centre de Saclay

Nicolas Authier
Jérôme Piot
Xavier Jacquet
Guillaume Rousseau
Commissariat à l'Énergie Atomique et aux Énergies Alternatives, Centre de Valduc

Kevin H. Reynolds
Y-12 National Security Complex

Internal Reviewer

Soon S. Kim
Lawrence Livermore National Laboratory

Independent Reviewers

Matthieu Duluc
François Trompier
Marie Anne Chevallier
Sylvain Beytout (External Contractor, MILLENNIUM)
Institut de Radioprotection et de Sûreté Nucléaire

Luka Snoj
Institut Jožef Stefan

Jeffrey A. Favorite
Los Alamos National Laboratory

ALARM-TRAN-AIR-SHIELD-001

NEUTRON ACTIVATION FOIL AND THERMOLUMINESCENT DOSIMETER RESPONSES TO A BARE PULSE OF THE CEA VALDUC SILENE CRITICAL ASSEMBLY

IDENTIFICATION NUMBER: ALARM-TRAN-AIR-SHIELD-001

KEY WORDS: acceptable, CAAS, energy spectrum, neutron, neutron activation, photon, SILENE, TLD, uranyl nitrate

1.0 DETAILED DESCRIPTION

1.1 Overview of Experiment

This benchmark experiment was conducted as a joint venture between the US Department of Energy (DOE) and the French Commissariat à l'Energie Atomique (CEA). Staff at the Oak Ridge National Laboratory (ORNL) in the US and the Centre de Valduc in France planned this experiment. The experiment was conducted on October 11, 2010 in the SILENE critical assembly facility at Valduc. Several other organizations contributed to this experiment and the subsequent evaluation, including CEA Saclay, Lawrence Livermore National Laboratory (LLNL), the Y-12 National Security Complex (NSC), Babcock International Group in the United Kingdom, and Los Alamos National Laboratory (LANL).

The goal of this experiment was to measure neutron activation and thermoluminescent dosimeter (TLD) doses from a source similar to a fissile solution critical excursion. The resulting benchmark can be used for validation of computer codes and nuclear data libraries as required when performing analysis of criticality accident alarm systems (CAASs). A secondary goal of this experiment was to perform a qualitative test on the performance of two CAAS detectors similar to those currently and formerly in use in some US DOE facilities. The detectors tested were the CIDAS MkX and the Rocky Flats NCD-91. The CIDAS detects gammas with a Geiger-Muller tube and the Rocky Flats detects neutrons via charged particles produced in a thin ${}^6\text{LiF}$ disc depositing energy in a Si solid state detector. These detectors were being evaluated to determine whether they would alarm, so they were not expected to generate benchmark quality data.

The neutron activation measurements were performed using several different types of activation foils. These foils included Au, Ni, In, Ti, Fe, Mg, and Co. The neutron activation foils were placed at several locations around the bare SILENE critical assembly, some with additional concrete shielding and some unshielded. Within a few hours after SILENE was pulsed, these foils were collected, and their activation was measured by CEA Valduc staff. Note that the Ti foil activation data were not included as part of the experimental data reported by Valduc, but they were part of the experimental setup. This foil was included because the Valduc staff had experience irradiating Ti with fast systems, and they wanted to evaluate using Ti with a thermal system. Several Ti neutron activation reactions have a threshold energy above 5 MeV, but ${}^{47}\text{Ti}(\text{n},\text{p}){}^{48}\text{Sc}$ has a threshold around 2 MeV. This reaction did not produce good experimental results because the natural abundance of ${}^{47}\text{Ti}$ is only about 7.5%. Furthermore, the half-life is about 3.5 days, which was logistically a problem because there were five other activation products with shorter half-lives that needed to be measured first.

There were also three types of TLDs. The TLDs provided by CEA Valduc were Al_2O_3 powder (TLD-500), and LiF TLDs were provided by ORNL (TLD-700 crystals and powder). The TLDs were placed around the bare SILENE critical assembly in close proximity to the neutron activation foils. The TLDs were collected at

ALARM-TRAN-AIR-SHIELD-001

the same time as the neutron activation foils after the experiment was conducted, but the TLD doses were not read until several weeks or months later at Valduc and ORNL. Similar to this experiment, measurements of neutron activation and TLD doses were performed at the SILENE critical assembly facility using a lead shield ([ALARM-TRAN-PB-SHIELD-001](#)) and a polyethylene shield ([ALARM-TRAN-CH2-SHIELD-001](#)).

The neutron activation and TLD dose data submitted here are for a pulse of the SILENE critical assembly when the critical assembly is bare (i.e. no shielding around the SILENE critical assembly). In some instances, additional concrete shielding was used between the bare SILENE critical assembly and the neutron activation foils and TLDs. In total, 41 neutron activation products were measured from 33 activation foils, and 17 TLDs measured photon doses at 7 locations. Based on the analysis of the measured data, the uncertainties of the measurements, and the benchmark uncertainties, 39 measurements of neutron activation products and 7 TLD dose measurements from 7 locations were found to be acceptable for use as benchmark data.

1.2 Description of Experimental Configuration

Detectors were placed at 7 different locations around the SILENE critical assembly to measure neutron activation and photon dose. SILENE was not surrounded by any reflector, so some of the detectors were unshielded (or only shielded by air). The remaining detectors were shielded from the bare SILENE assembly by blocks of concrete. The detectors used were neutron activation foils and thermoluminescent dosimeters (TLDs). The 7 locations where measurements were made are referred to as *collimator A*, *collimator B*, *free field*, and *scattering box* (positions 1 through 4). A photograph of this experiment is shown in Fig. 1-1, and a plan view drawing of this experiment is shown in Fig. 1-2. In Fig. 1-2, SILENE is represented as a red circle, and dimensions measured from SILENE are from the upper portion (see Fig. 1-54), which has an outside radius of 18.4 cm. In this figure, it also appears that the shielding in front of collimator B is 0.21 m thick, but this distance includes a 1 cm gap between the shielding and the front of the collimator. See Figs. 1-65 through 1-68 for the definition of scattering box positions 1 through 4. Measurements made for large distances in this experiment (greater than 50 to 100 cm) were made using a laser-based distance measuring device. Small distances (less than 50 to 100 cm) were made using a meter stick or measuring tape that had increments of millimeters. All of the angles shown in the figures in Sect. 1.0 are approximate, and are based on markings on the floor of the SILENE reactor room (see Fig. 1-1). The angles used to locate pieces of equipment around SILENE in the benchmark model (Sect. 3.0) are calculated more precisely using trigonometry and distance measurements between fixed pieces of equipment and/or the SILENE room walls.

ALARM-TRAN-AIR-SHIELD-001



Fig. 1-1. Experimental setup.

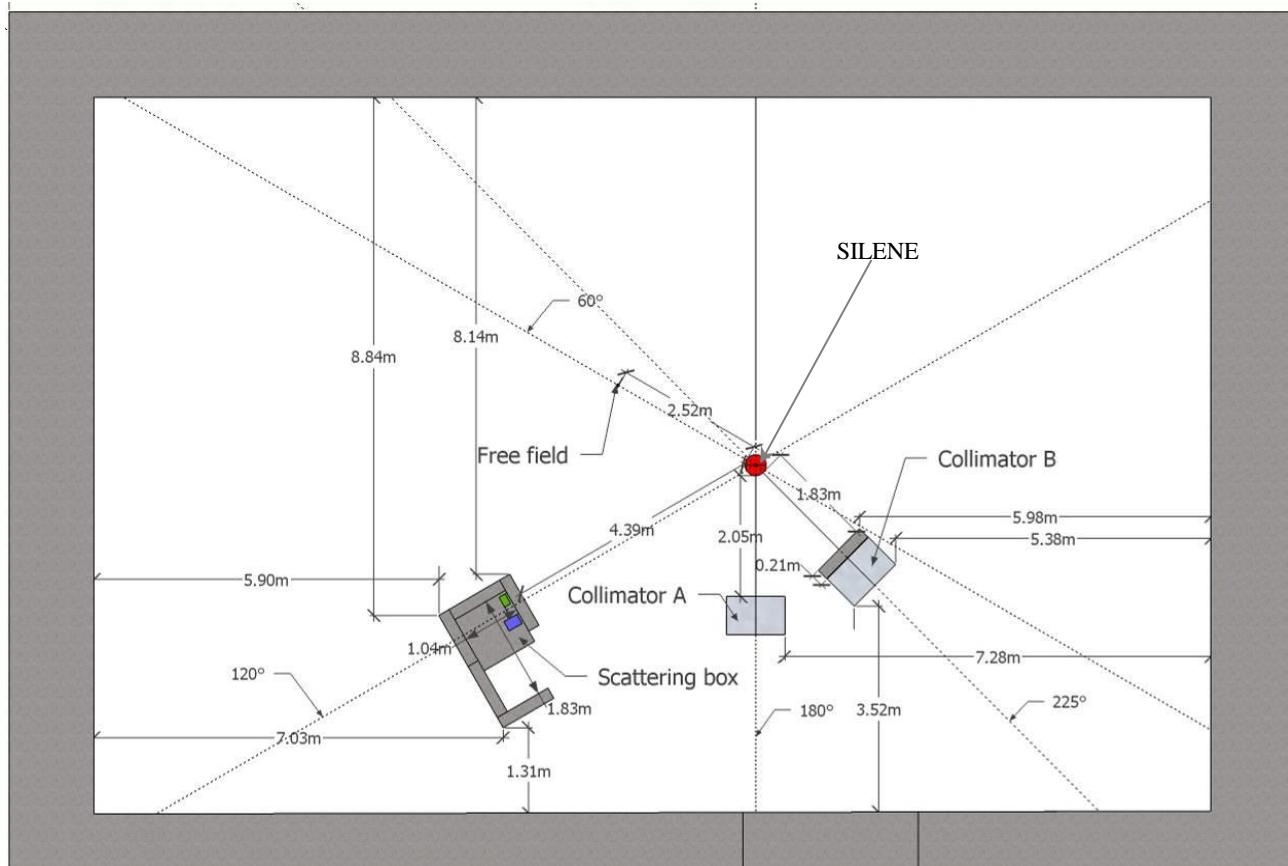


Fig. 1-2. Overview of experiment configuration with dimensions.

ALARM-TRAN-AIR-SHIELD-001

The following subsections provide details about the experimental setup and dimensions. Due to the importance of the source (SILENE critical assembly) and detectors (neutron activation foils and TLDs) in shielding benchmarks, the discussion of these items is in Sects. 1.4 and 1.5, respectively.

1.2.1 SILENE Room – The walls, floor, and ceiling surrounding SILENE are constructed of thick concrete. The dimensions of this room are shown in Figs. 1-3 and 1-4.

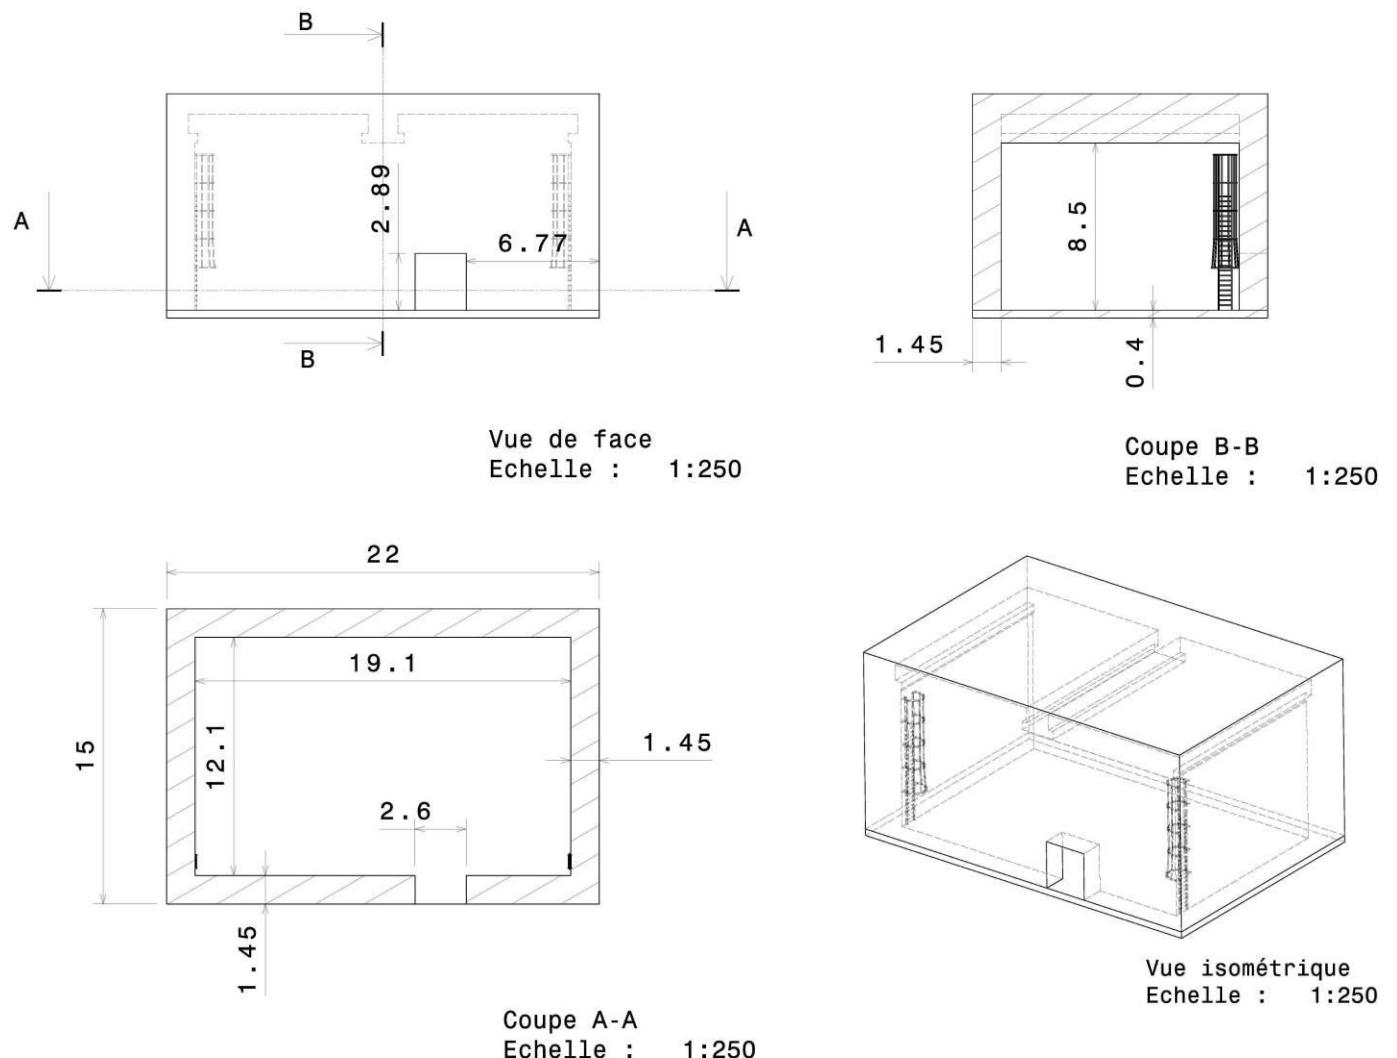


Fig. 1-3. SILENE critical assembly room (dimensions in meters).

ALARM-TRAN-AIR-SHIELD-001

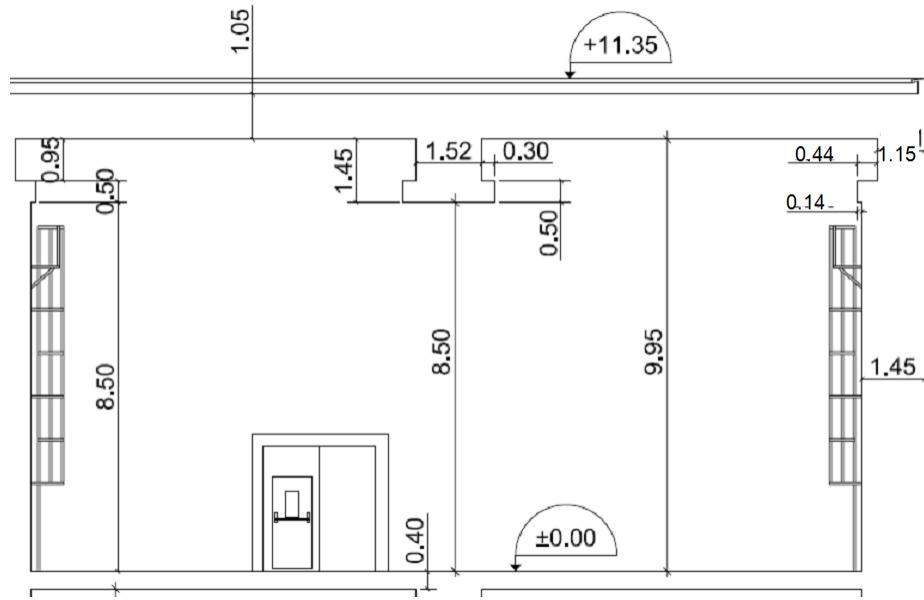


Fig. 1-4. Details of crane supports in SILENE room (dimensions in meters).

Figures 1-3 and 1-4 do not include details about the doors of this room, but Figs. 1-5 through 1-7 provide these details. Figure 1-5 shows the two hollow steel doors that provide passage through the SILENE room walls (inner door also shown in Figs. 1-4 and 1-1 behind the collimators). Figures 1-6 and 1-7 show the two large concrete doors outside the SILENE room that provide shielding between SILENE and the space outside the SILENE room. In Fig. 1-5, the two concrete shield doors appear to be the same size, but actually the concrete shield door nearest the concrete wall is 60 cm × 490 cm × 390 cm, while the other concrete shield door is 74 cm × 450 cm × 360 cm.

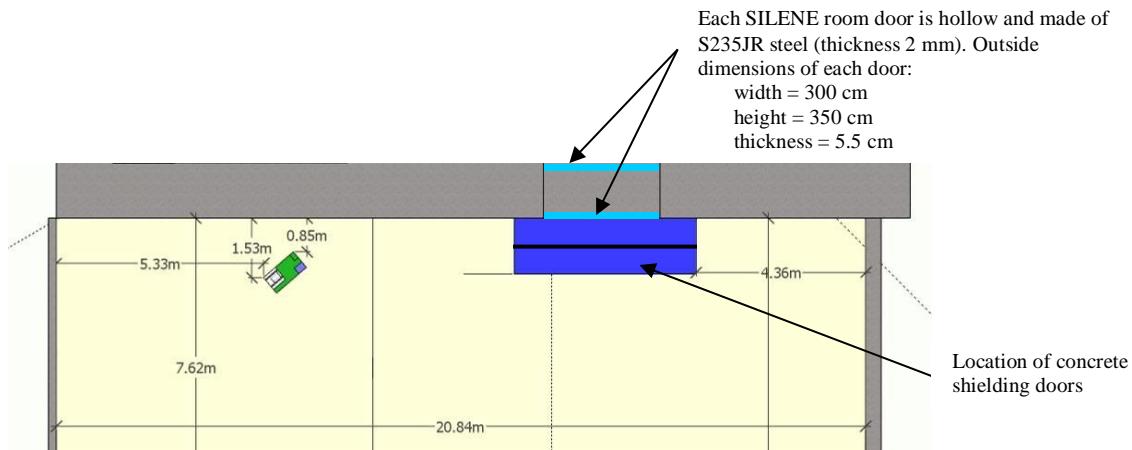


Fig. 1-5. SILENE room doors.

ALARM-TRAN-AIR-SHIELD-001

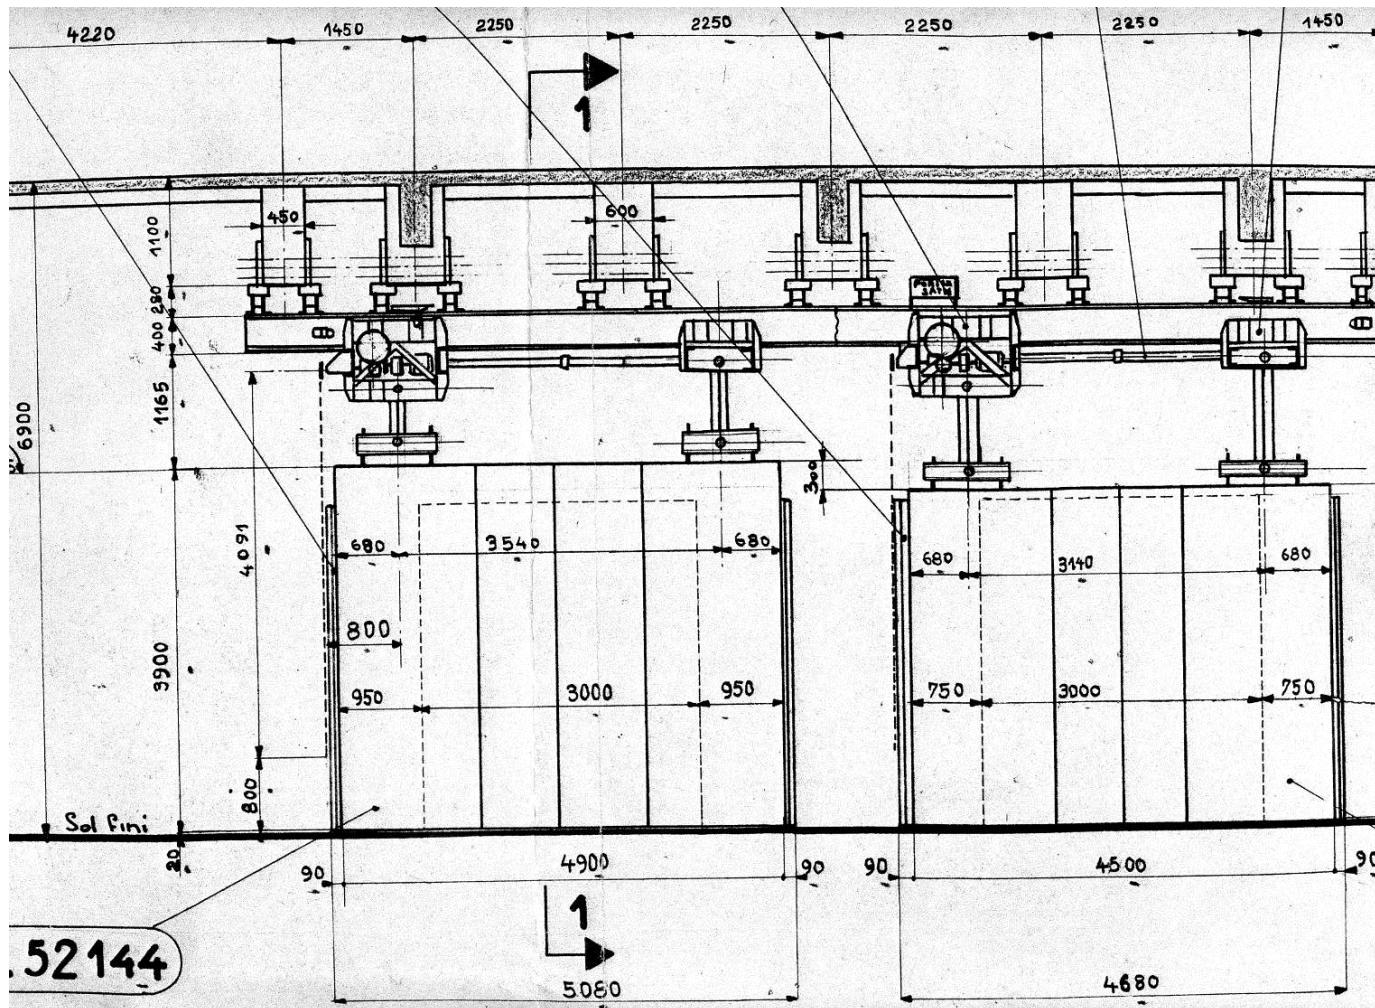


Fig. 1-6. SILENE room shielding doors; view from hallway outside the room (dimensions in mm).

(The door on the left is nearest to the wall.)

ALARM-TRAN-AIR-SHIELD-001

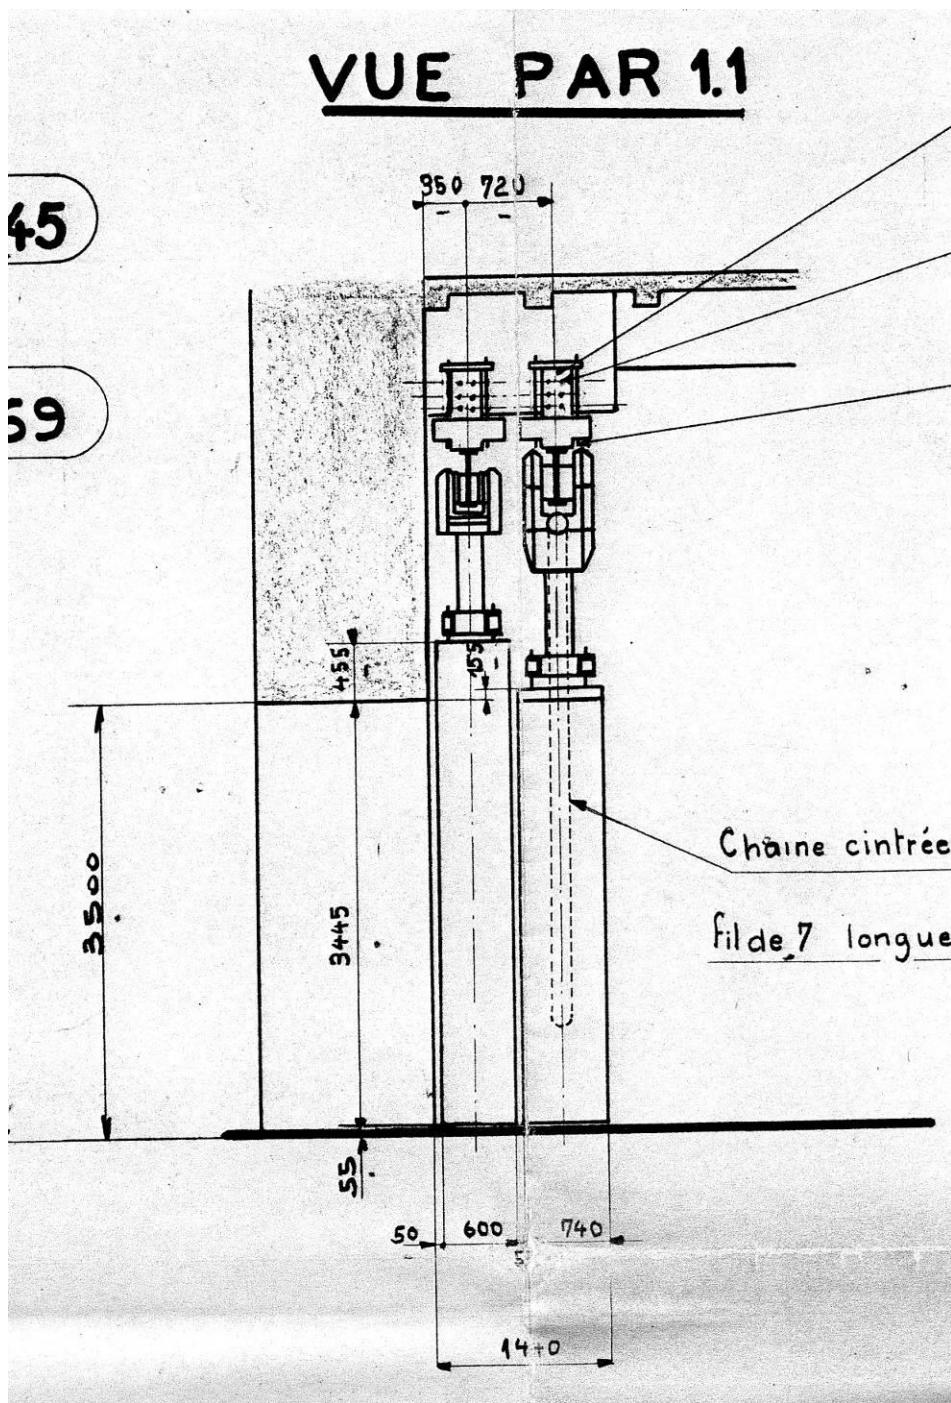


Fig. 1-7. SILENE room shielding doors; view from the side (dimensions in mm).

None of the previous figures show the exact location of SILENE in the room where the experiment was performed. Figure 1-8 shows the location of the central axis of the cylindrical SILENE critical assembly within this room.

ALARM-TRAN-AIR-SHIELD-001

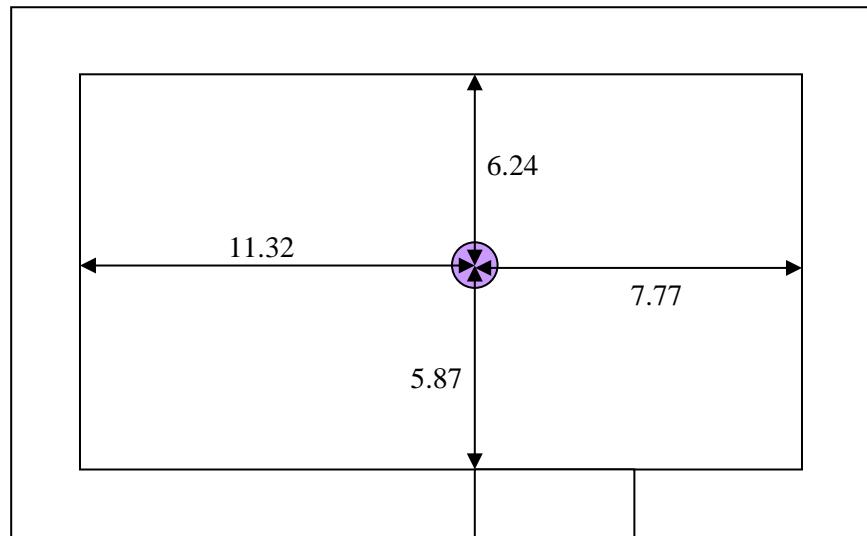


Fig. 1-8. Location of axis of SILENE in room (dimensions in meters).

1.2.2 Collimator Boxes – The collimator boxes are open on the side nearest SILENE. Collimator A can be seen in Fig. 1-1, and both collimators can be seen in Fig. 1-9 below. There was a 20 cm thick block of concrete between SILENE and collimator B in this experiment, which is also visible in Fig. 1-1. No concrete was placed between SILENE and collimator A in this experiment.

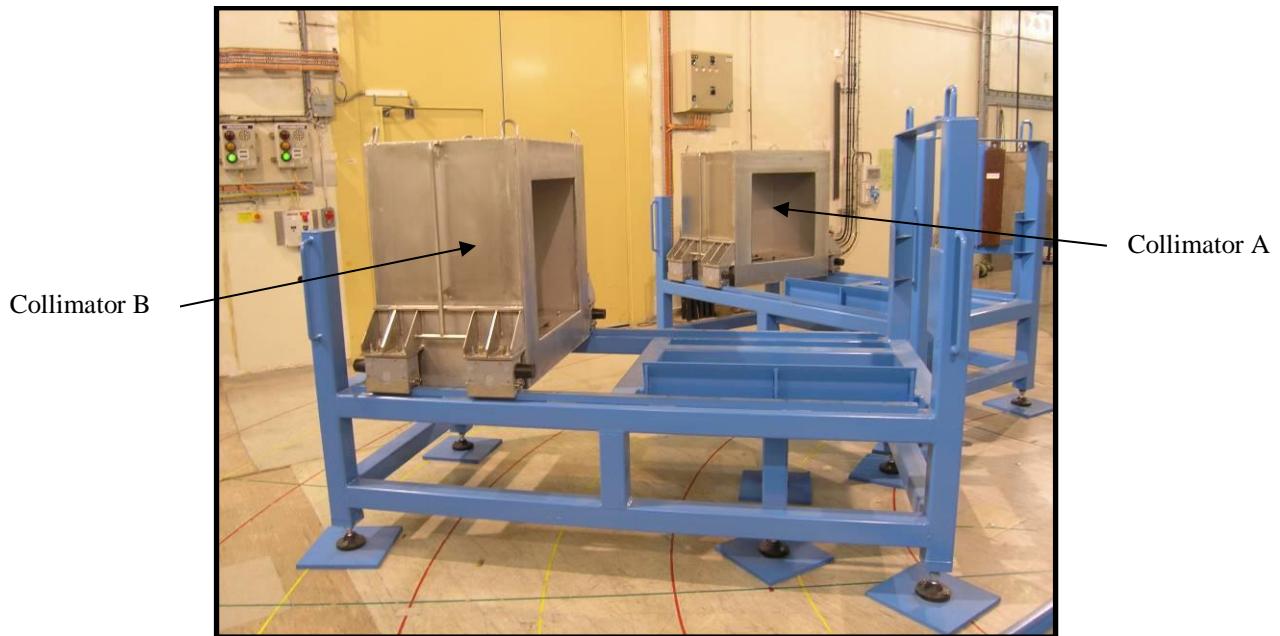


Fig. 1-9. Collimators A and B on their stands (without concrete shielding).

These two collimator boxes have identical designs of layered materials. The layers are stainless steel, copper, lead, and a plaster containing boron and polyethylene. The French name of this plaster is *plâtre polyéthylène boré*, which is referred to as *PPB9* for the remainder of this evaluation. Samples or detectors can be placed inside the collimator boxes, and the shielding provided by the boxes exposes the samples or detectors to

ALARM-TRAN-AIR-SHIELD-001

direct fission radiation from SILENE, isolating the samples or detectors from scattered radiation within the SILENE room. The two attachments on each side of the collimators are housing for wheels that roll along a track on the collimator stands (4 wheels per collimator). These wheels and the track allow for easy movement of the collimators.

The collimators sit on steel S235JR stands (painted blue in photographs) that allow shielding materials to be placed between SILENE and the inner cavity of the collimators. This is best observed in Fig. 1-1, Collimator B. Note that the stands are constructed of hollow rectangular tubes measuring 10 cm × 10 cm with a wall thickness of 5 mm. Figures 1-10 through 1-13 provide details about the collimator stands and some of the outside dimensions of the collimators. Figures 1-14 through 1-17 provide details about the different layers of material that make the internal portions of the collimators, which are uniform on all sides of the collimator boxes. Finally, Figs. 1-18 and 1-19 show details inside the collimators.

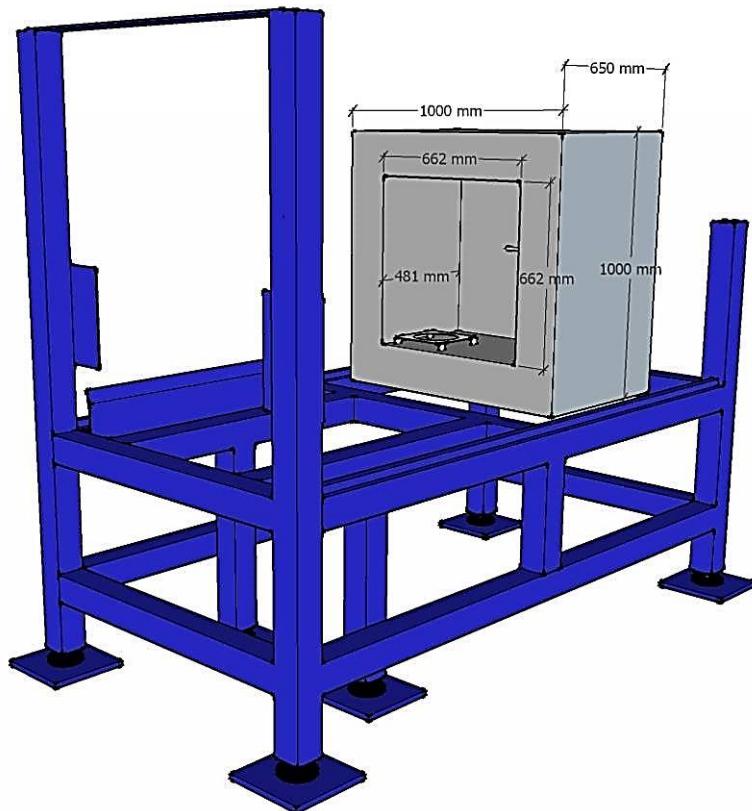


Fig. 1-10. Isometric view of collimator and stand.

ALARM-TRAN-AIR-SHIELD-001

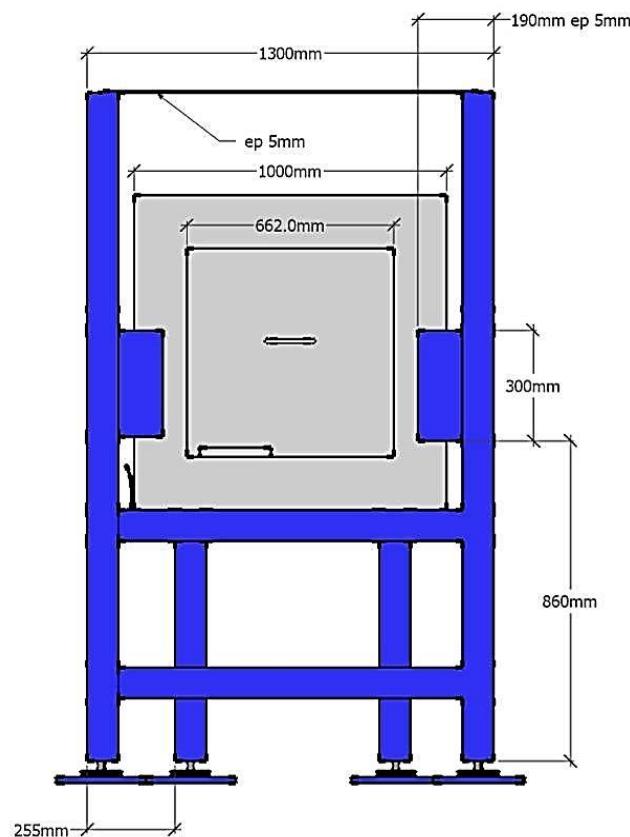


Fig. 1-11. Front view of collimator and stand.

ALARM-TRAN-AIR-SHIELD-001

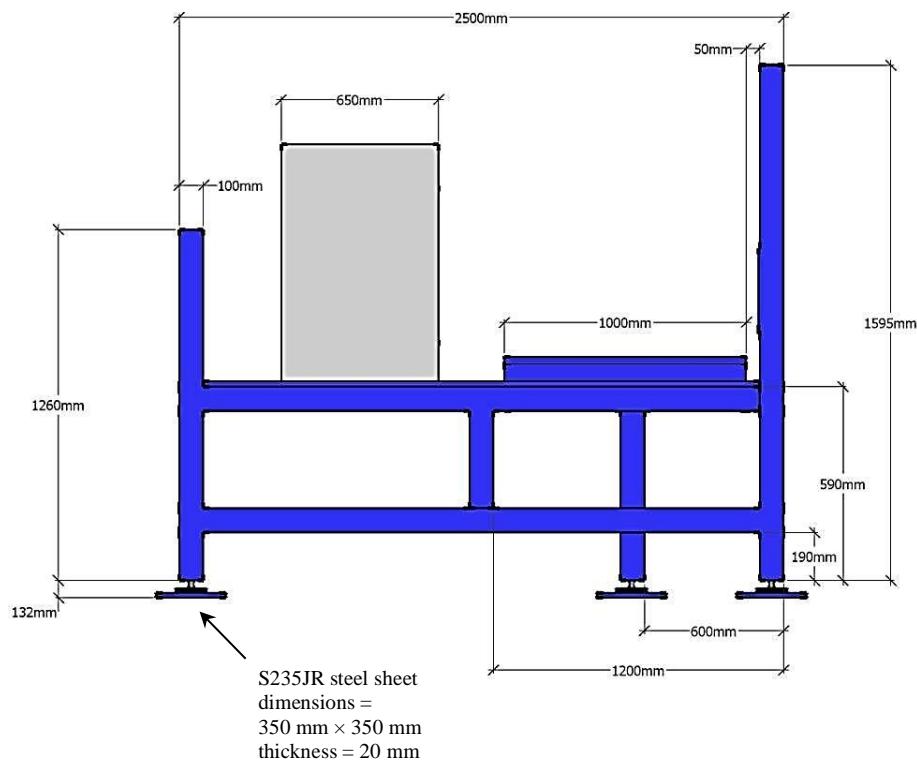


Fig. 1-12. Side view of collimator and stand.

ALARM-TRAN-AIR-SHIELD-001

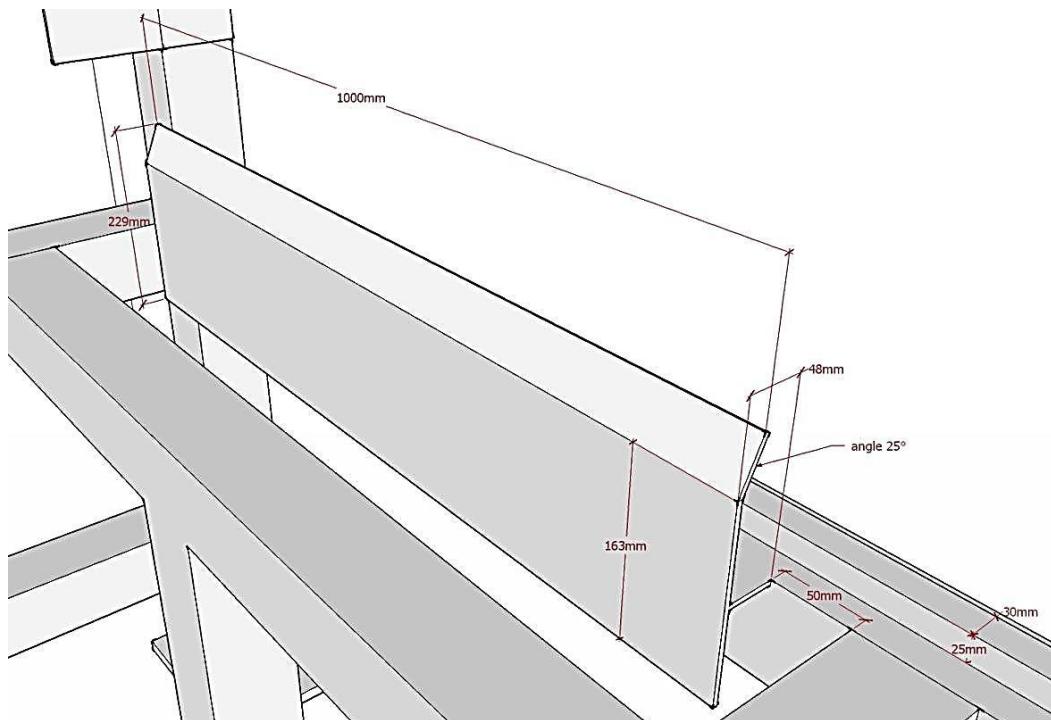


Fig. 1-13. Detail of collimator guide on stand.

ALARM-TRAN-AIR-SHIELD-001

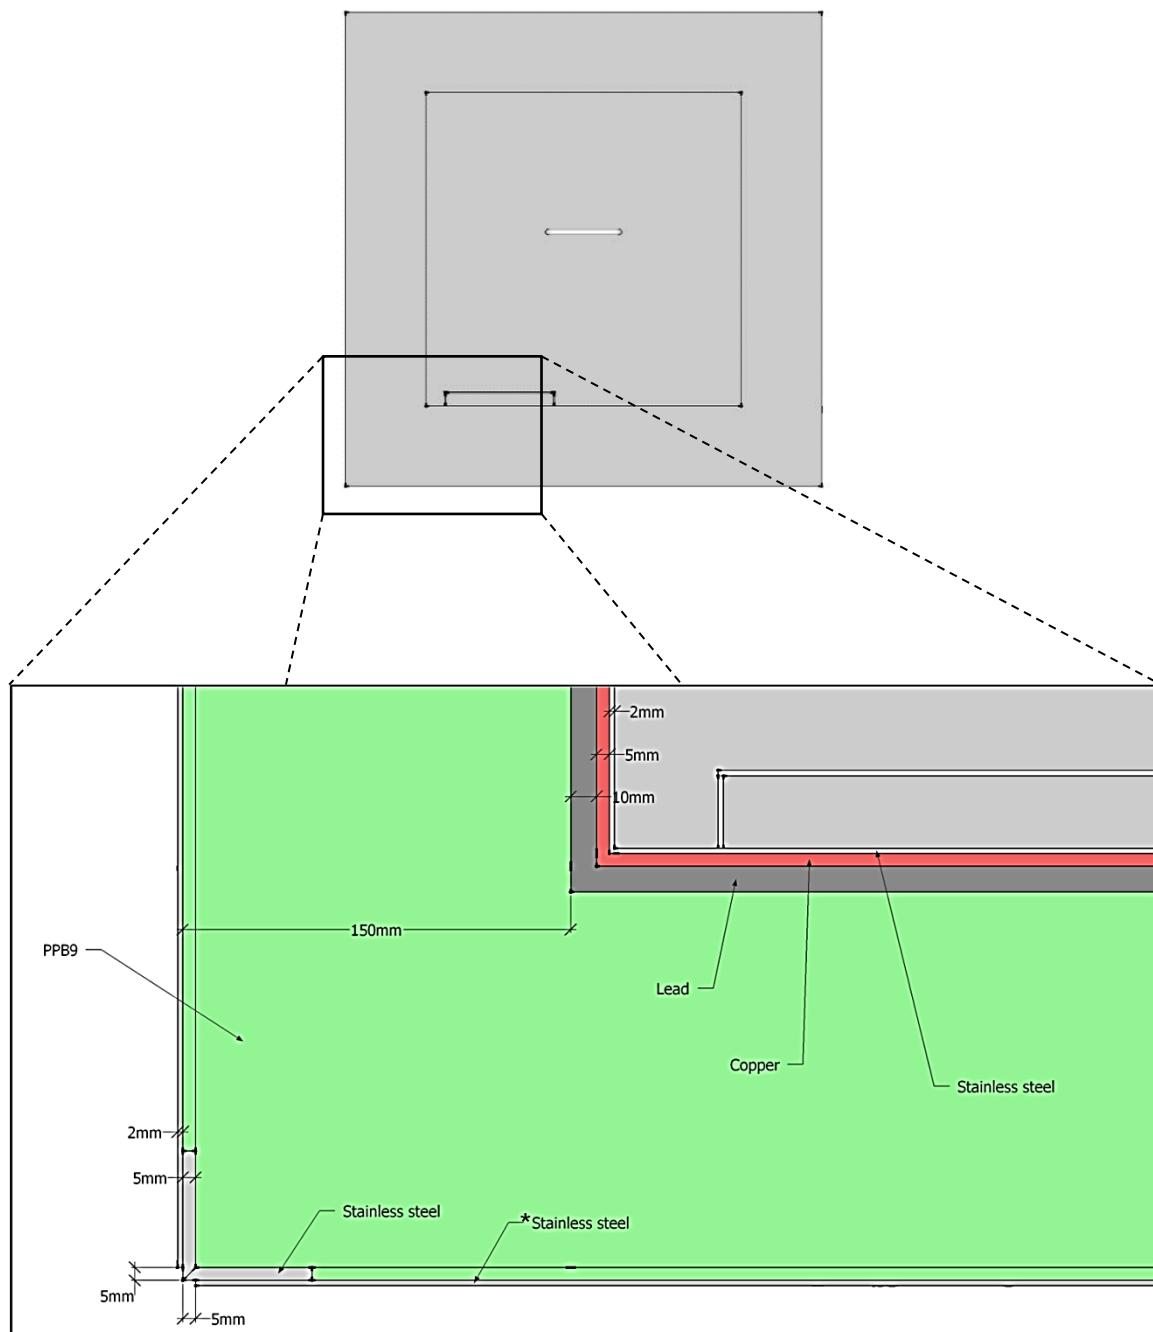


Fig. 1-14. Cross section of collimator layers, front view.

ALARM-TRAN-AIR-SHIELD-001

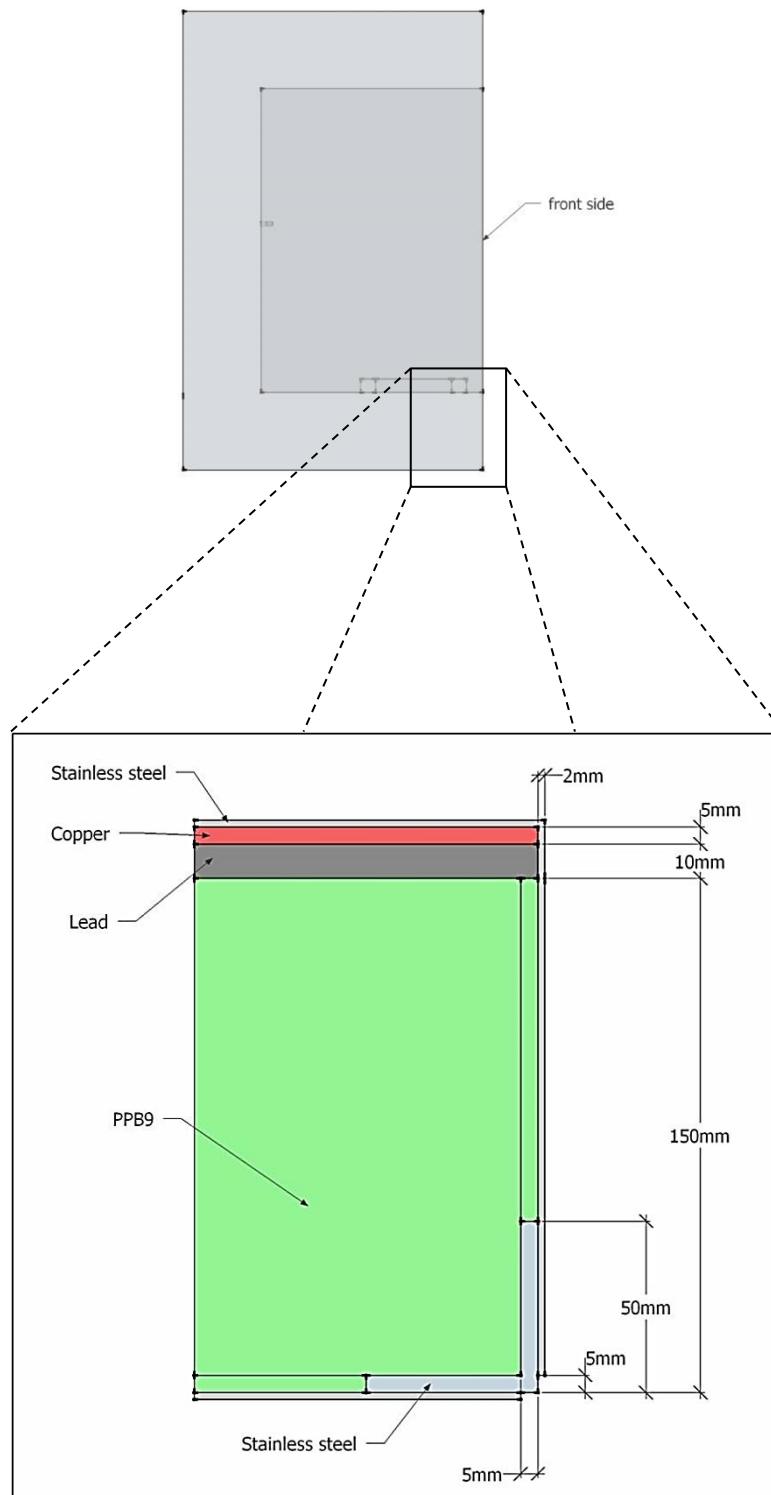


Fig. 1-15. Cross section of collimator layers, side view.

ALARM-TRAN-AIR-SHIELD-001

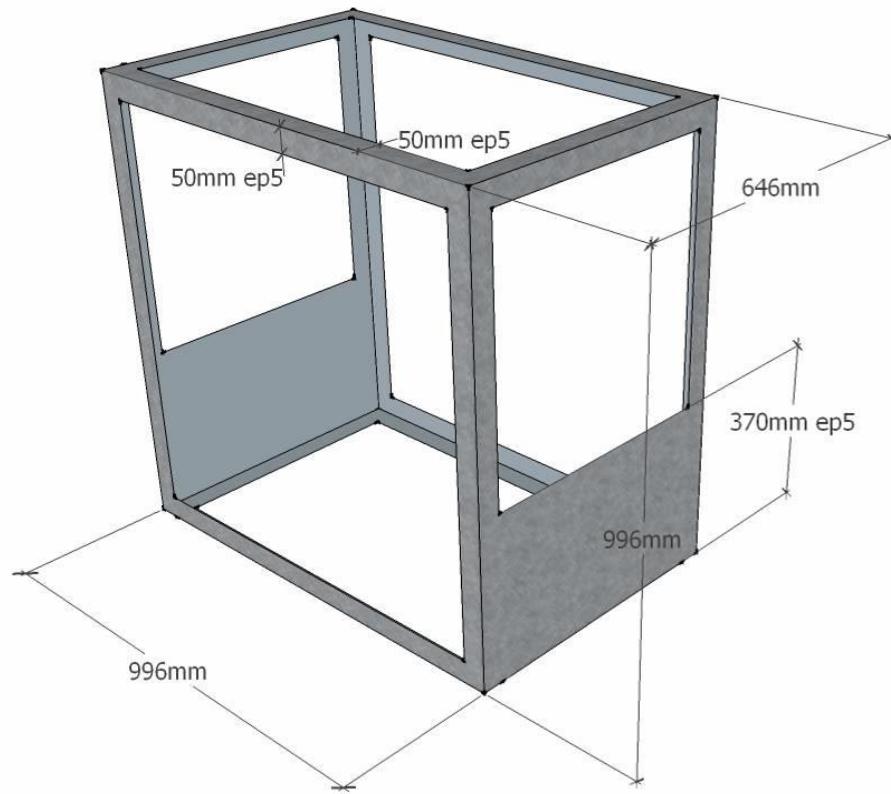


Fig. 1-16. Isometric view of collimator inner stainless steel frame (thickness 5 mm).

ALARM-TRAN-AIR-SHIELD-001

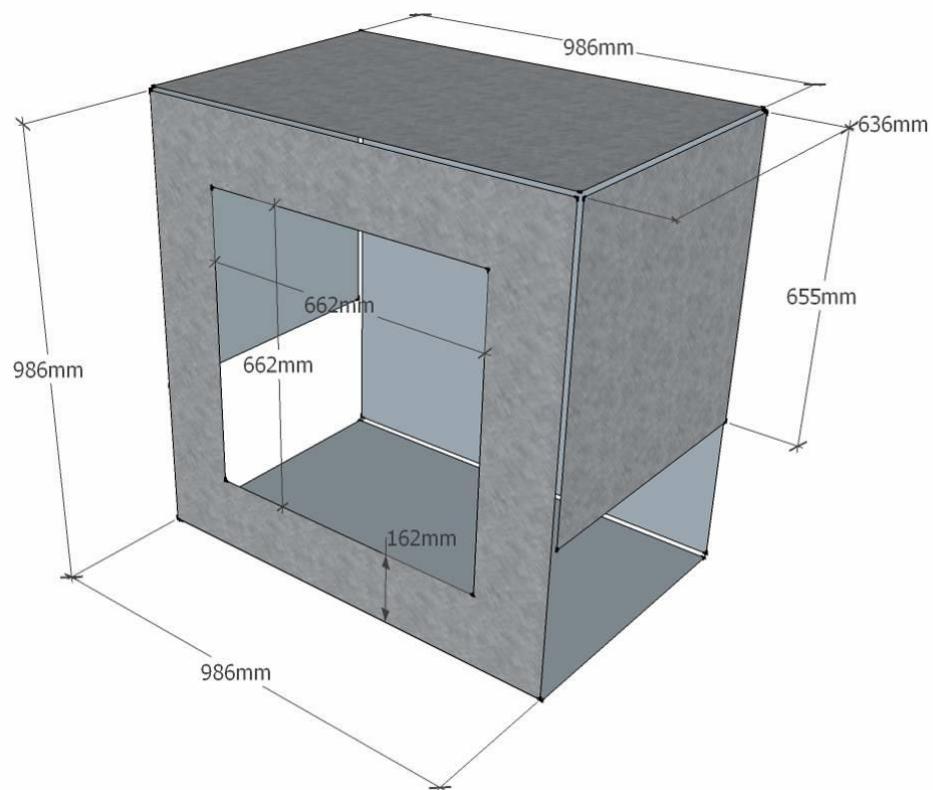


Fig. 1-17. Isometric View of collimator outer stainless steel layer (thickness 2 mm).

ALARM-TRAN-AIR-SHIELD-001

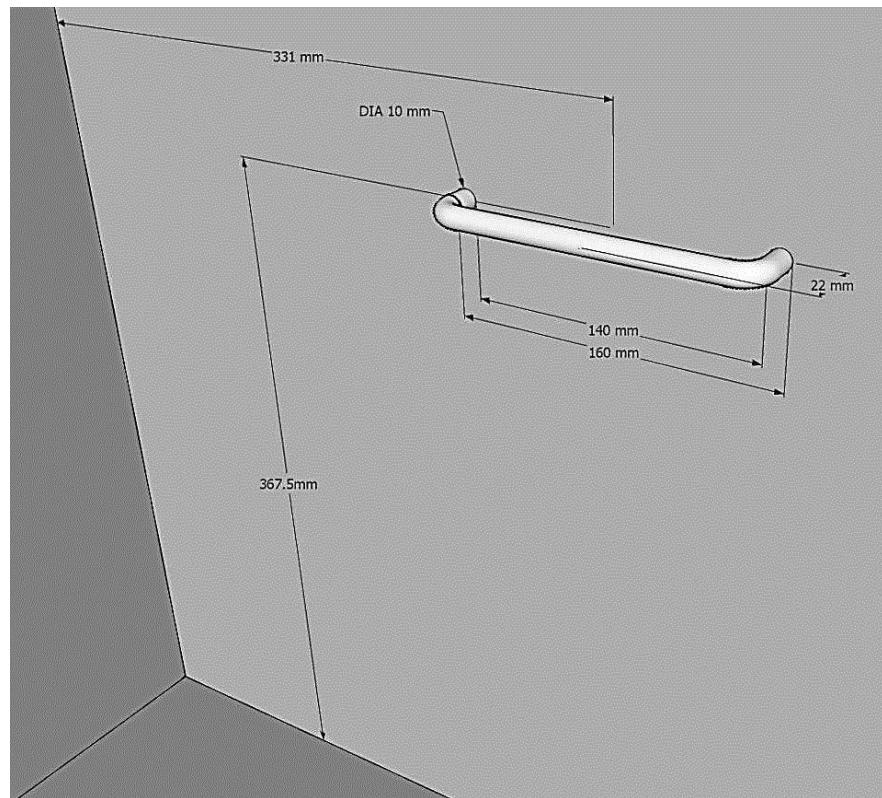


Fig. 1-18. Detail of collimator activation foil holder support bar.

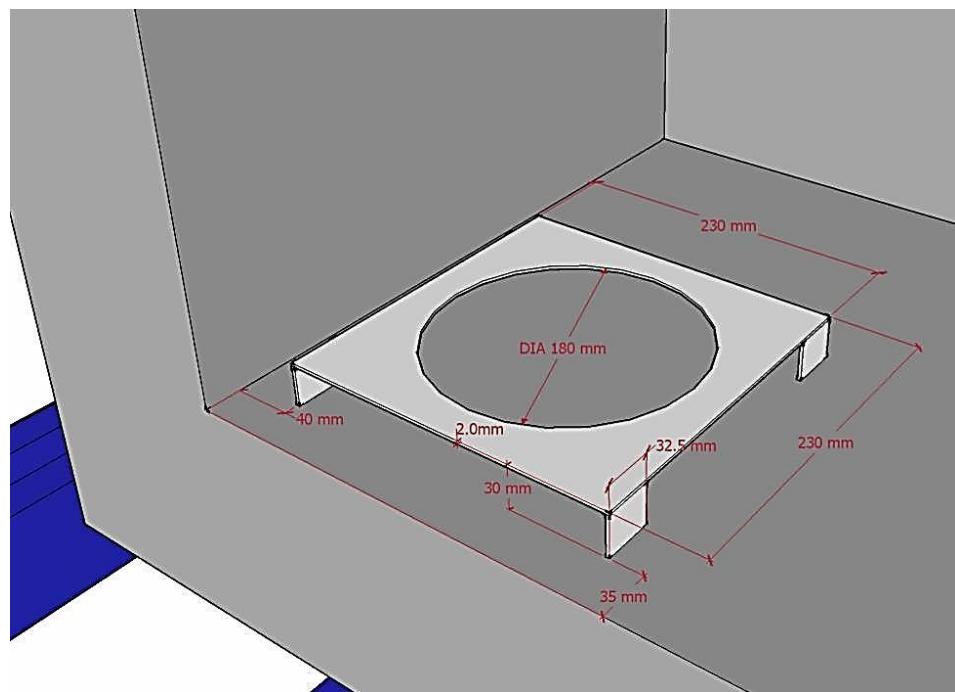


Fig. 1-19. Detail of small support stand inside collimator.

ALARM-TRAN-AIR-SHIELD-001

While the previous figures provide details about the collimator dimensions and materials within the collimators, Figures 1-20 through 1-23 locate the collimators and stands within the SILENE room. In Figs. 1-20 and 1-21, SILENE is represented by a red circle. The distance from SILENE to the collimator stands shown in Figs 1-20 and 1-21 is measured from the bottom portion of SILENE, which has an outside radius of 20 cm. All other dimensions in Figs. 1-20 and 1-21 are measured from one of the four concrete walls of the SILENE room to the collimator stand. Figures 1-22 and 1-23 show multiple measurements of the distance of each collimator box above the concrete floor. Each collimator is centered on its stand from side to side (left to right in Fig. 1-20). The location of each collimator on the stand from front to back (top to bottom in Fig. 1-20) is approximately the same for both collimators. These distances are shown in Fig. 1-2.

ALARM-TRAN-AIR-SHIELD-001

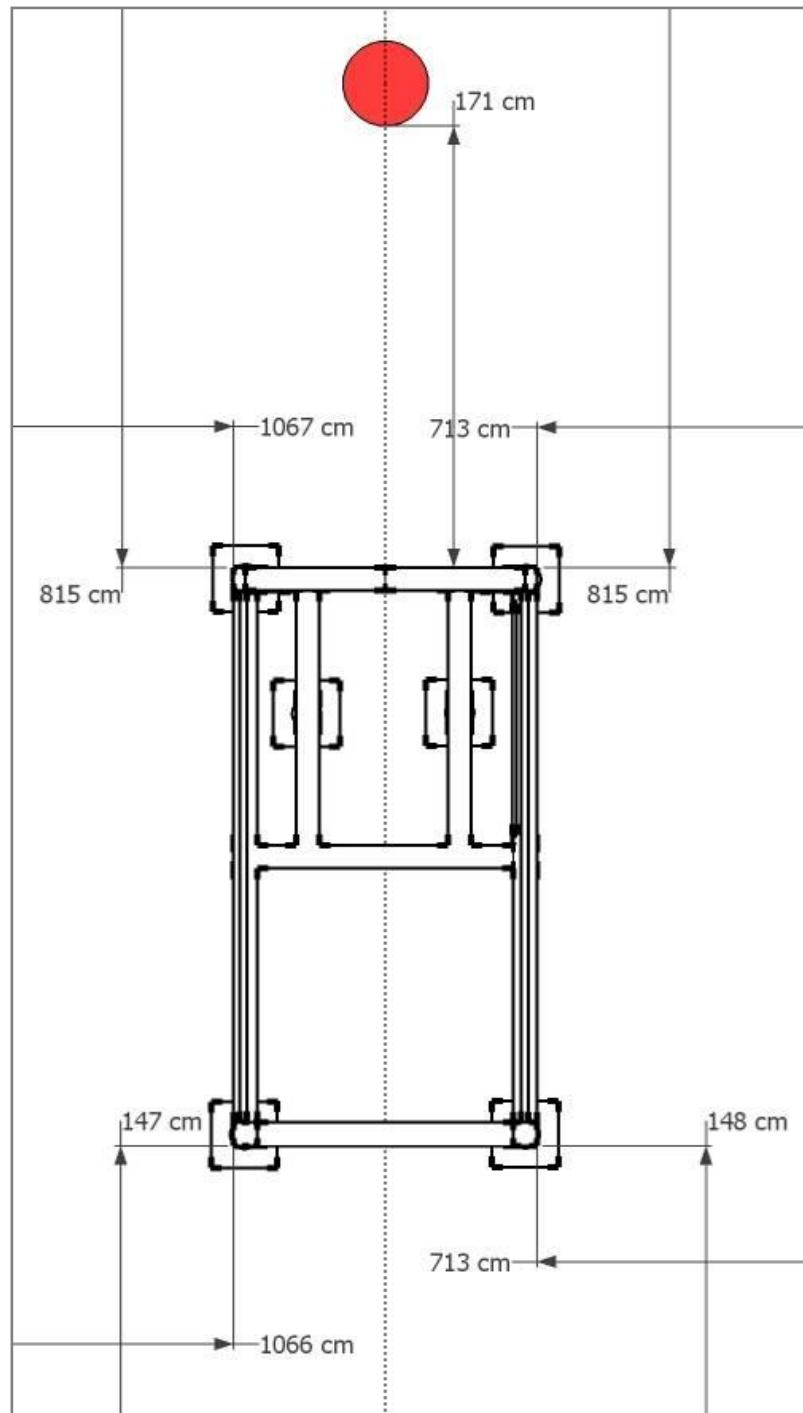


Fig. 1-20. Location of collimator A stand within the SILENE room.

ALARM-TRAN-AIR-SHIELD-001

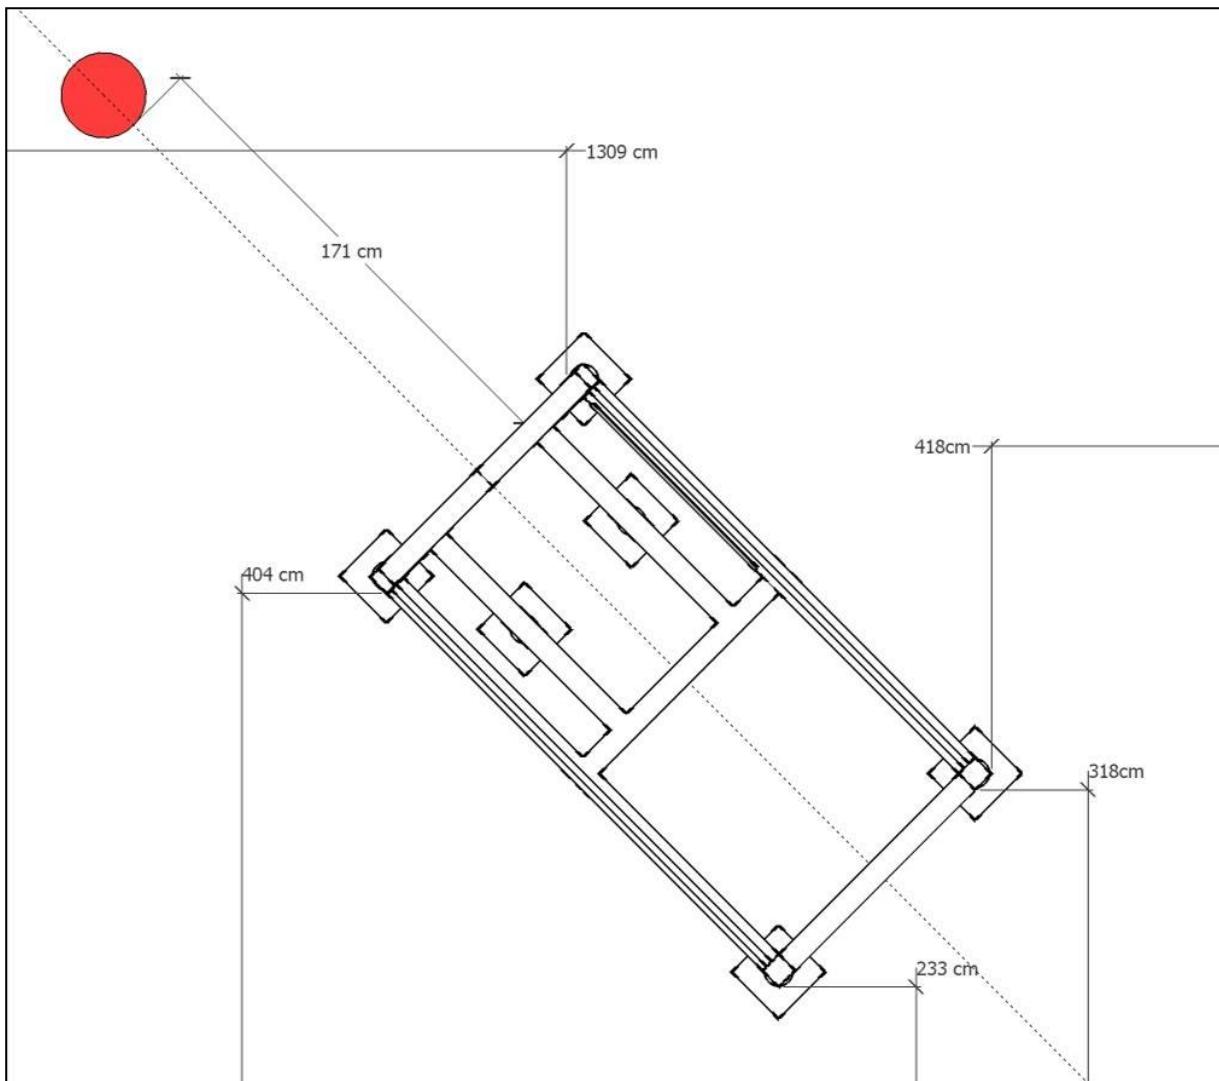


Fig. 1-21. Location of collimator B stand within the SILENE room.

ALARM-TRAN-AIR-SHIELD-001

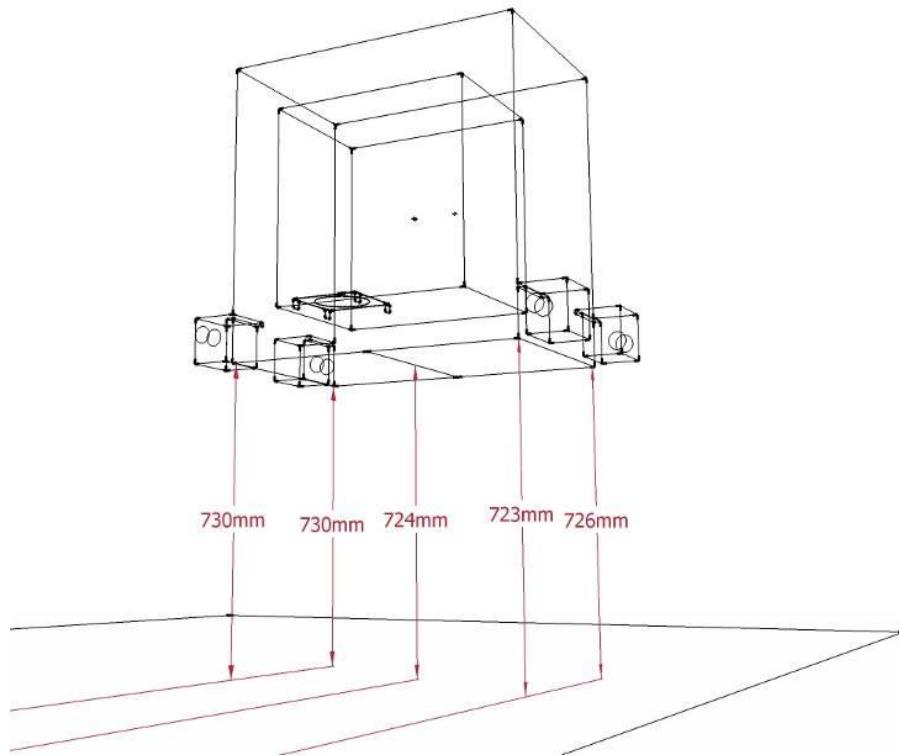


Fig. 1-22. Height of collimator A above SILENE room floor.

ALARM-TRAN-AIR-SHIELD-001

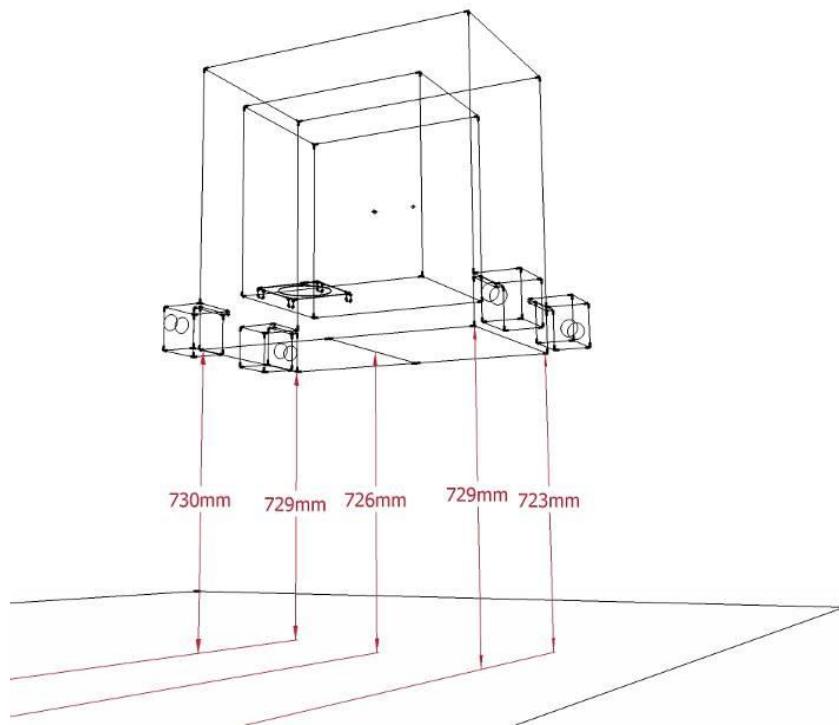


Fig. 1-23. Height of collimator B above SILENE room floor.

1.2.3 Collimator B Shielding –A 20 cm thick barite concrete block was between SILENE and collimator B in this experiment, which can be seen in Fig. 1-1 and below in Fig. 1-24. Barely observable in Fig. 1-24 is a 1 cm gap between the barite shield and the collimator. This gap allowed for access of cables to the CAAS detectors inside collimator B. Figure 1-25 is a photograph of one of the concrete shield blocks used in this experiment, which is followed by drawings with dimensions in Figs. 1-26 and 1-27. The frames and lift points of all the concrete blocks are all made of S235JR steel.

ALARM-TRAN-AIR-SHIELD-001

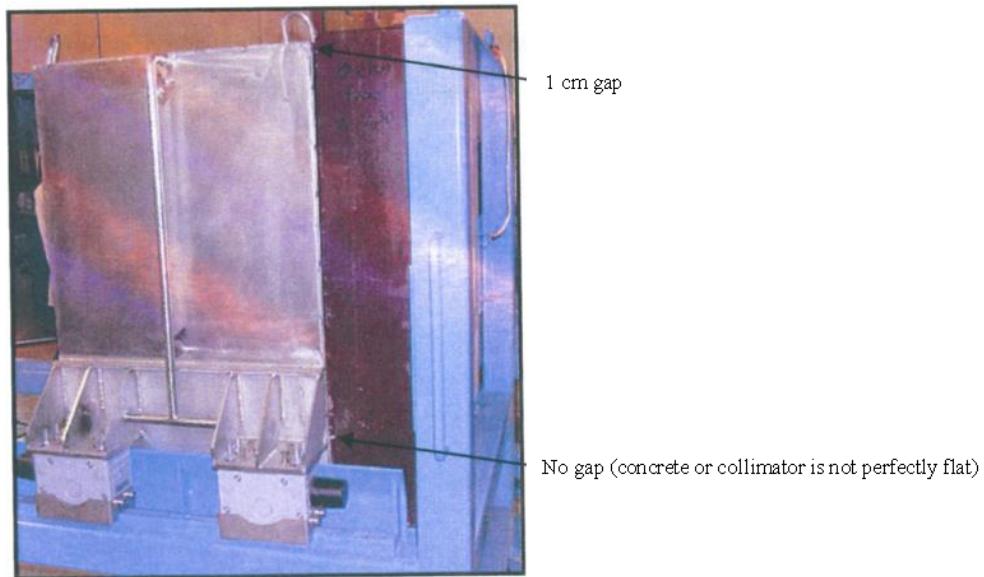


Fig. 1-24. Collimator B, barite concrete shield block, and 1 cm gap.



Fig. 1-25. Concrete shield block.

ALARM-TRAN-AIR-SHIELD-001

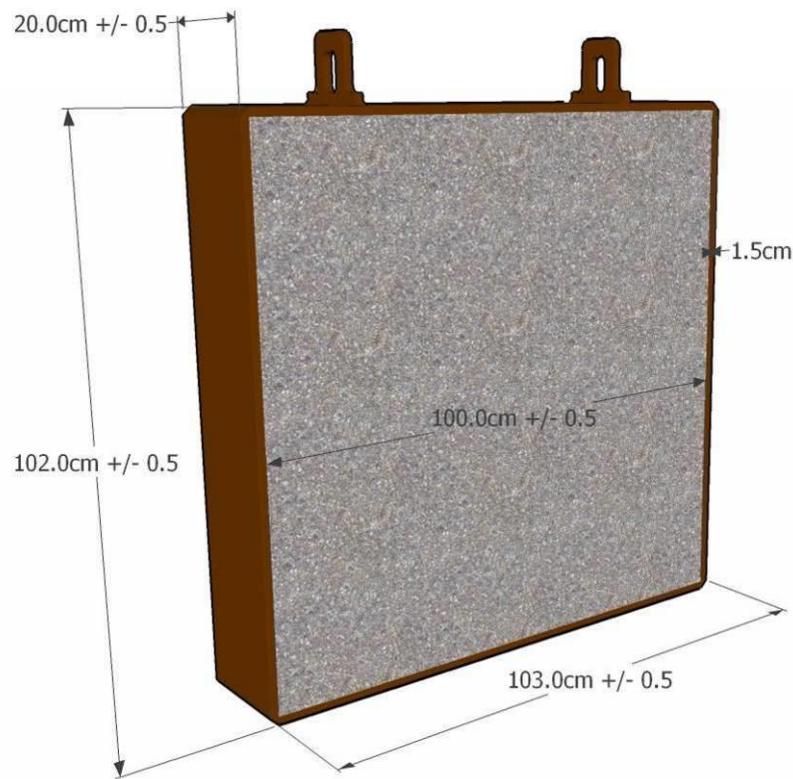


Fig. 1-26. Dimensions of concrete shield blocks (all dimensions are cm).

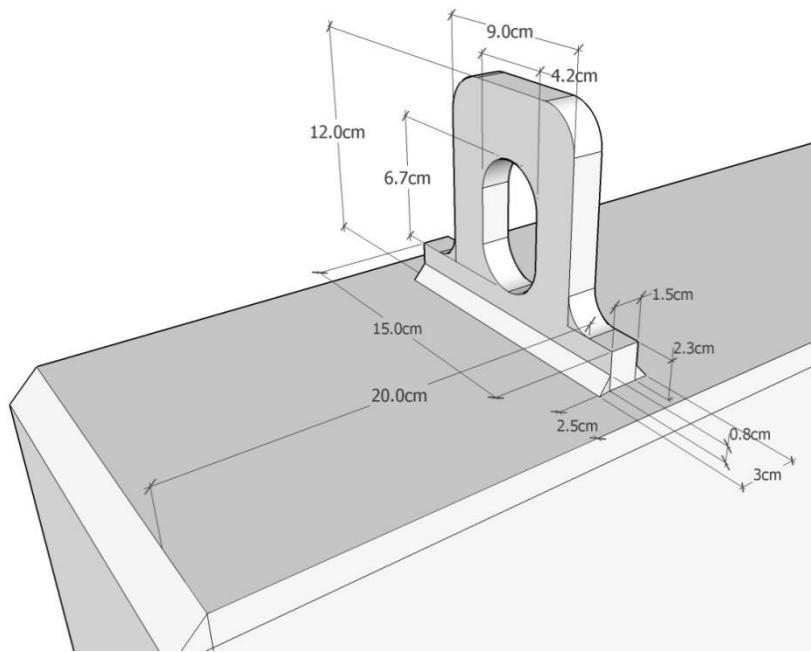


Fig. 1-27. Dimensions of concrete shield block lift points.

ALARM-TRAN-AIR-SHIELD-001

1.2.4 Foil Holders – A holder containing the neutron activation foils in collimators A and B is inside of both collimators hanging on the support bar (described in Fig. 1-18). This holder is made of aluminum alloy AG3M. Figure 1-28 shows a photograph of one of these holders, and Figs. 1-29 through 1-31 are drawings of the holder with dimensions. (The CEA TLD shown in these drawings will be described in more detail later and is not normally a part of these holders.)



Fig. 1-28. Collimator foil holder with neutron activation foils.

ALARM-TRAN-AIR-SHIELD-001

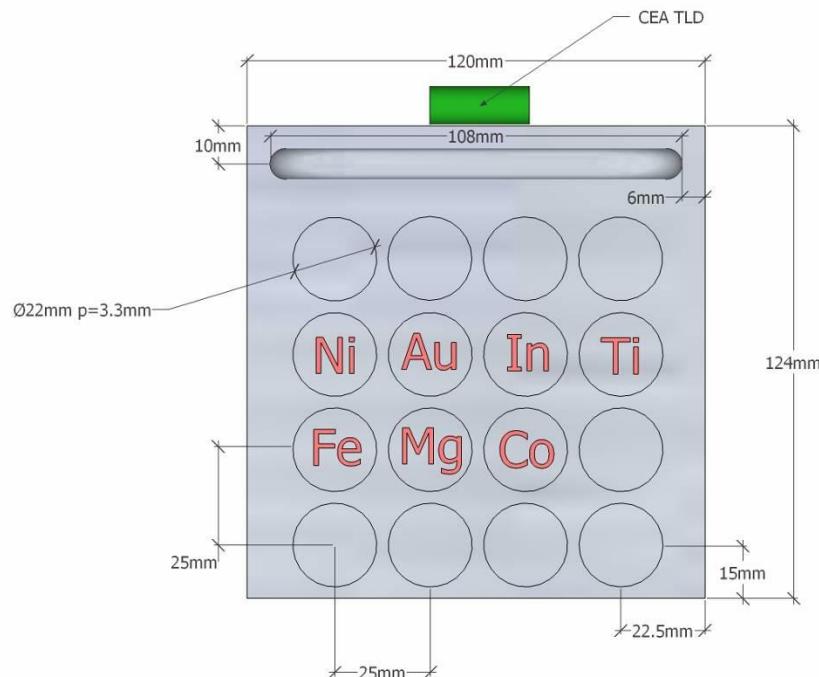


Fig. 1-29. Front of foil holder without front plate.

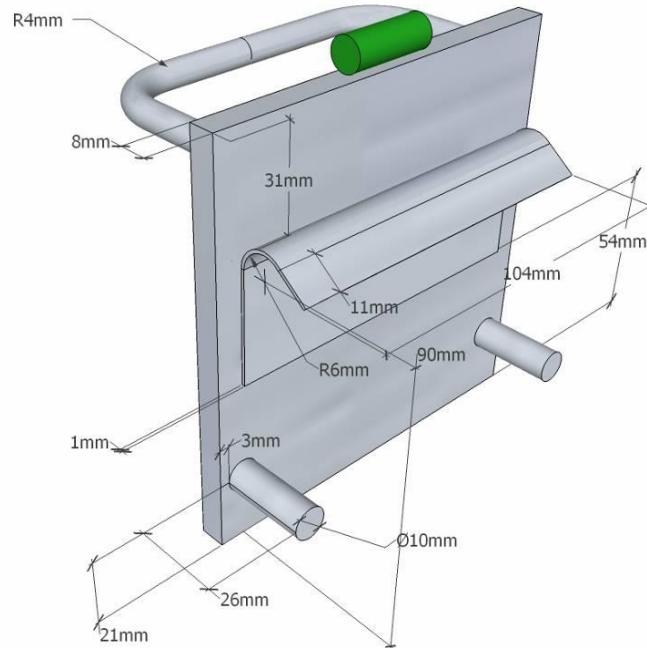


Fig. 1-30. Back and side of foil holder.

ALARM-TRAN-AIR-SHIELD-001

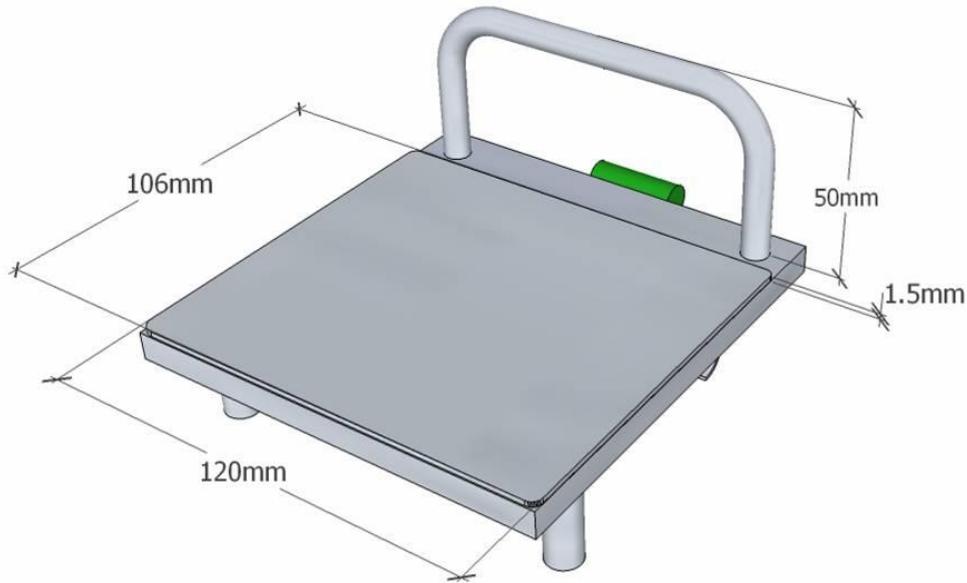


Fig. 1-31. Front of foil holder with front plate.

1.2.5 Free Field Location – The purpose of the free field location is to place a set of neutron activation foils and TLDs approximately the same distance from SILENE as those in collimators A and B. However, as the name of this location suggests, the activation foils and TLDs at this location are free of any shielding (collimator box or concrete) and are exposed to the radiation field emitted by SILENE and from scattering of the experimental room walls. Figure 1-32 is a photograph of the stand used to support the neutron activation foils and TLDs at the free field location, which is followed by drawings with dimensions in Figs. 1-33 through 1-35. The exact composition of the free field stand is unknown, but it clearly consists of steel (lower blue part), concrete, and aluminum. The free field stand can be located within the SILENE room via Fig. 1-2. The distance in Fig. 1-2 (2.52 m) is measured from the outside of the upper portion of SILENE (radius 18.4 cm) to the axis of the cylindrical portion of the free field stand.

ALARM-TRAN-AIR-SHIELD-001



Fig. 1-32. Free field location stand.

ALARM-TRAN-AIR-SHIELD-001

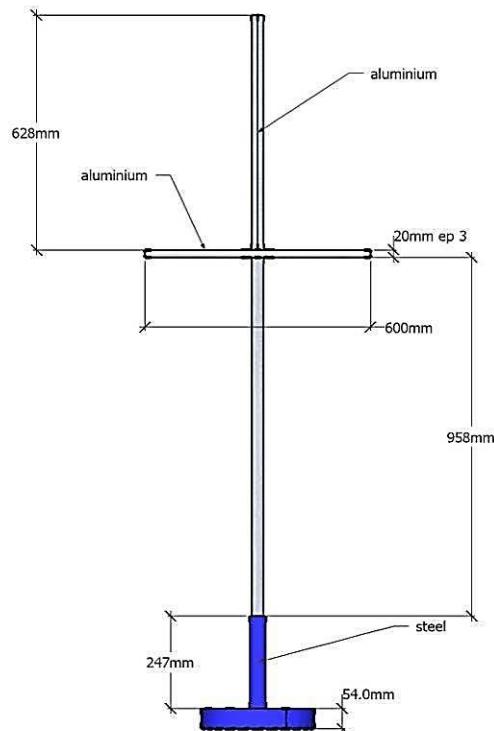


Fig. 1-33. Front view of free field stand.

ALARM-TRAN-AIR-SHIELD-001

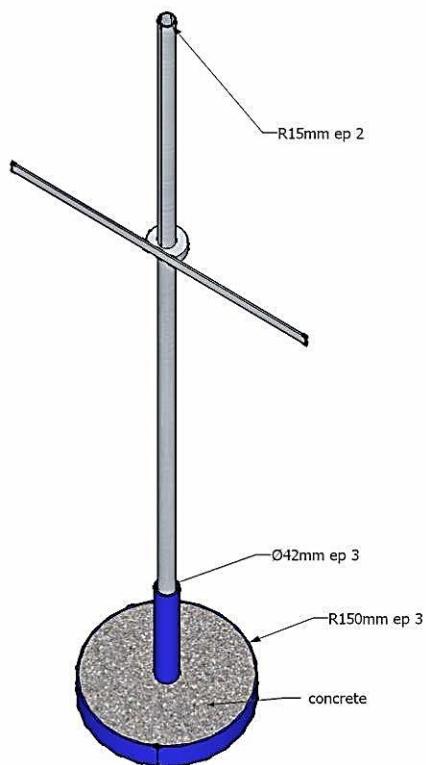


Fig. 1-34. Isometric view of free field stand.

ALARM-TRAN-AIR-SHIELD-001

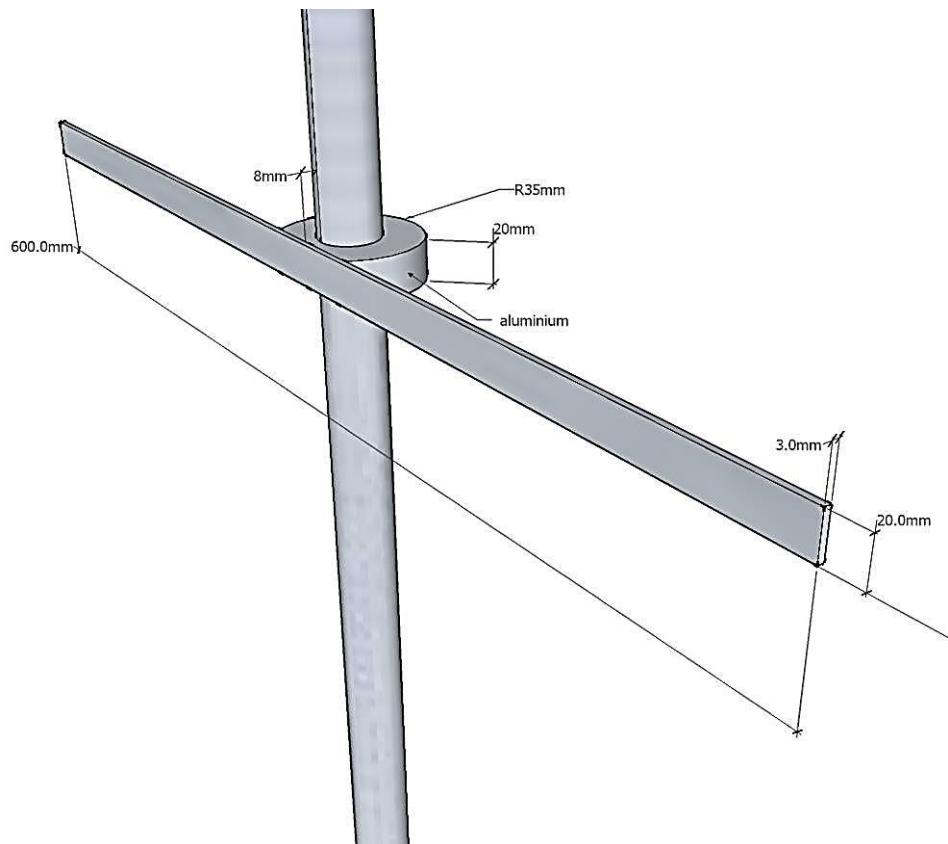


Fig. 1-35. Detail of free field stand support bar.

1.2.6 Scattering Box - The scattering box was designed to provide a location where detectors would be exposed to radiation transmitted through thick shielding materials and radiation that may have undergone a small number of scattering events. Six of the concrete shield blocks, geometrically described in Sect. 1.2.3, were used to construct the scattering box. Figure 1-36 is a photograph from the front of the scattering box looking in, while Fig. 1-37 is a photograph from the back. In Fig. 1-37, SILENE is visible, surrounded by the steel reflector (dark blue on the lower left), which was not used in this experiment. Figures 1-38 through 1-41 are drawings with dimensions of the scattering box stand. The scattering box stand is constructed of hollow S235JR steel tubes that are 10 cm × 5 cm. The tubes are painted blue and have a wall thickness of 5 mm. Figure 1-41 illustrates the details of the vertical support bars holding the concrete blocks in place in Figs. 1-36 and 1-37. While the support bars are vertical in these two figures, the drawing in Fig. 1-41 shows the bars lying horizontally.

ALARM-TRAN-AIR-SHIELD-001



Fig. 1-36. Front of scattering box (side nearest SILENE).



Fig. 1-37. Back of scattering box.

ALARM-TRAN-AIR-SHIELD-001

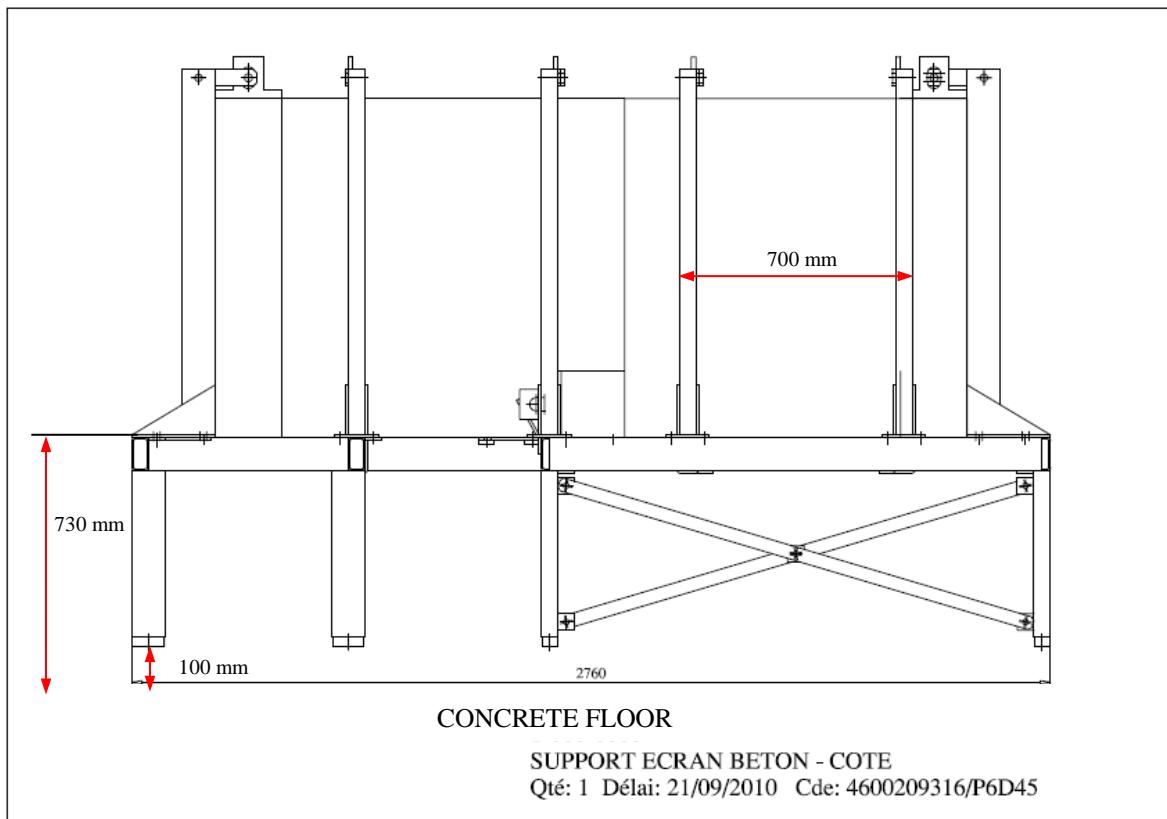


Fig. 1-38. Elevation view of the scattering box from the front (dimensions in mm).

ALARM-TRAN-AIR-SHIELD-001

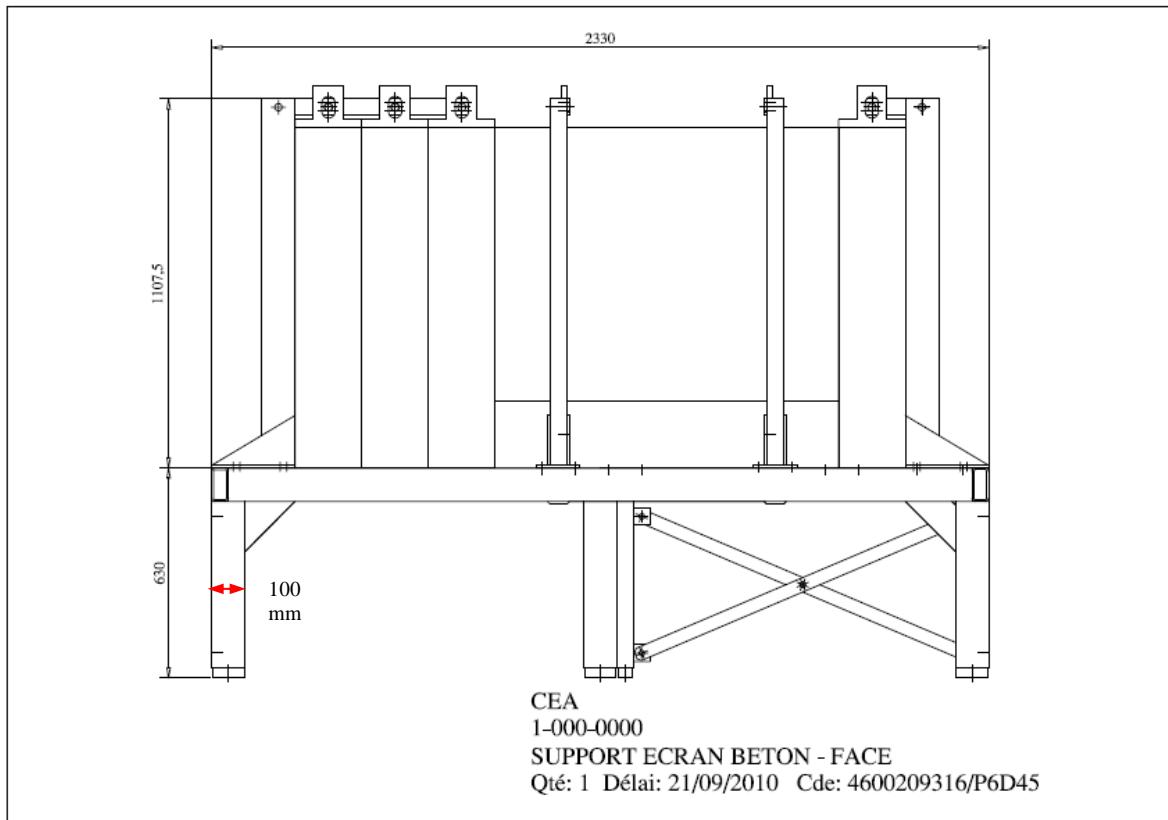


Fig. 1-39. Elevation view of the scattering box from the side nearest the free field location (dimensions in mm).

Note that there are three vertical 20 cm thick concrete blocks on the front of the scattering box in this drawing, but this experiment never used more than one concrete block in this position.

ALARM-TRAN-AIR-SHIELD-001

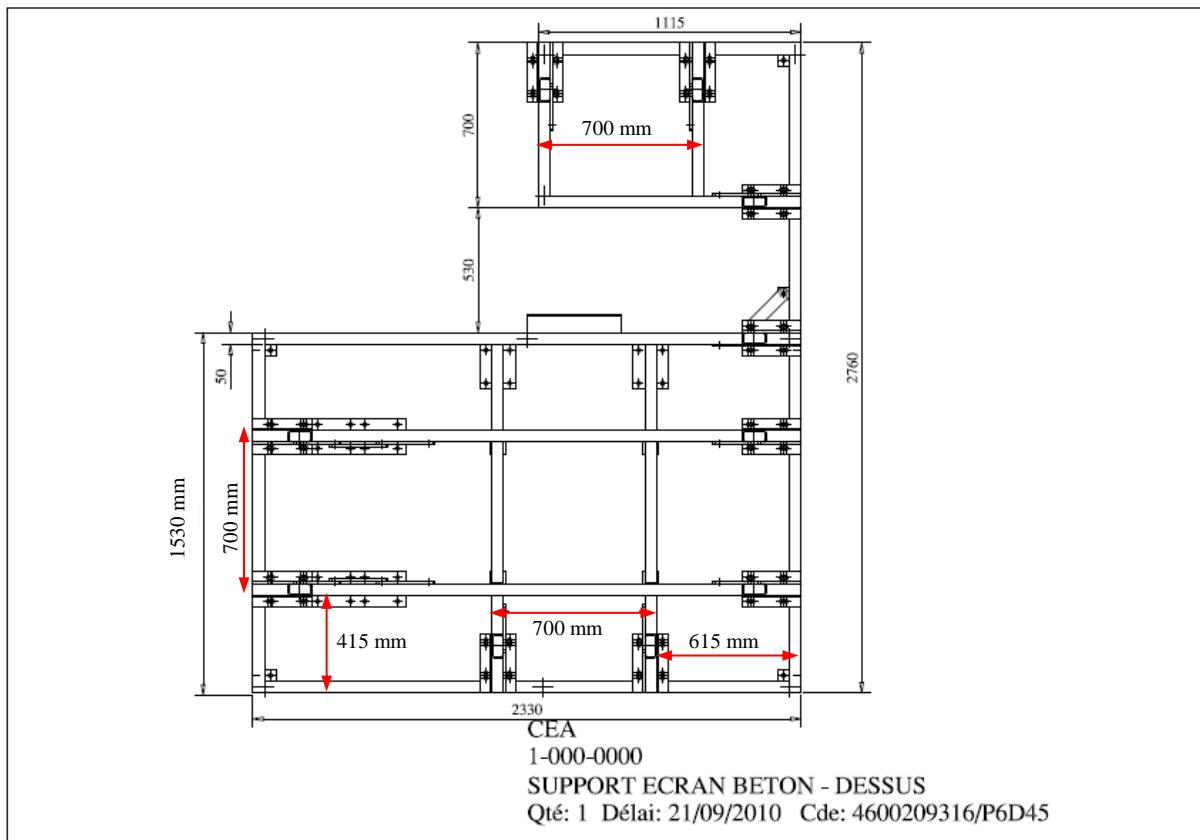


Fig. 1-40. Plan view of scattering box (dimensions in mm).

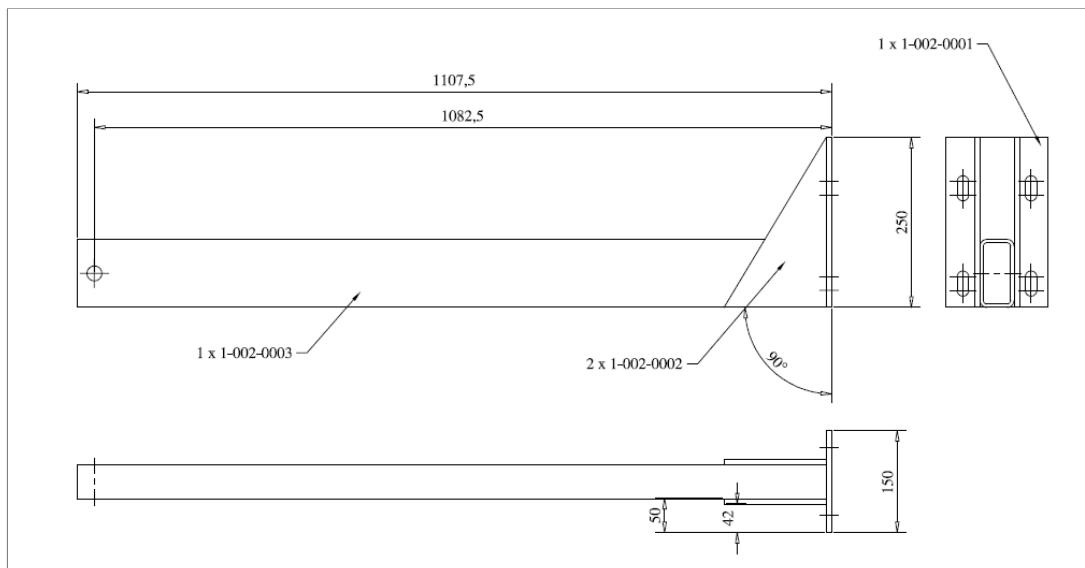


Fig. 1-41. Details of vertical support bars (dimensions in mm).

ALARM-TRAN-AIR-SHIELD-001

Figures 1-42 and 1-43 locate the scattering box and frame within the SILENE room. In Fig. 1-42, SILENE is represented by a red circle, and the distance from SILENE to the scattering box frame is measured from the lower portion of SILENE with a radius of 20 cm. The other dimensions in Fig. 1-42 are measured from one of the 4 SILENE room concrete walls, or they are dimensions of the scattering box support stand.

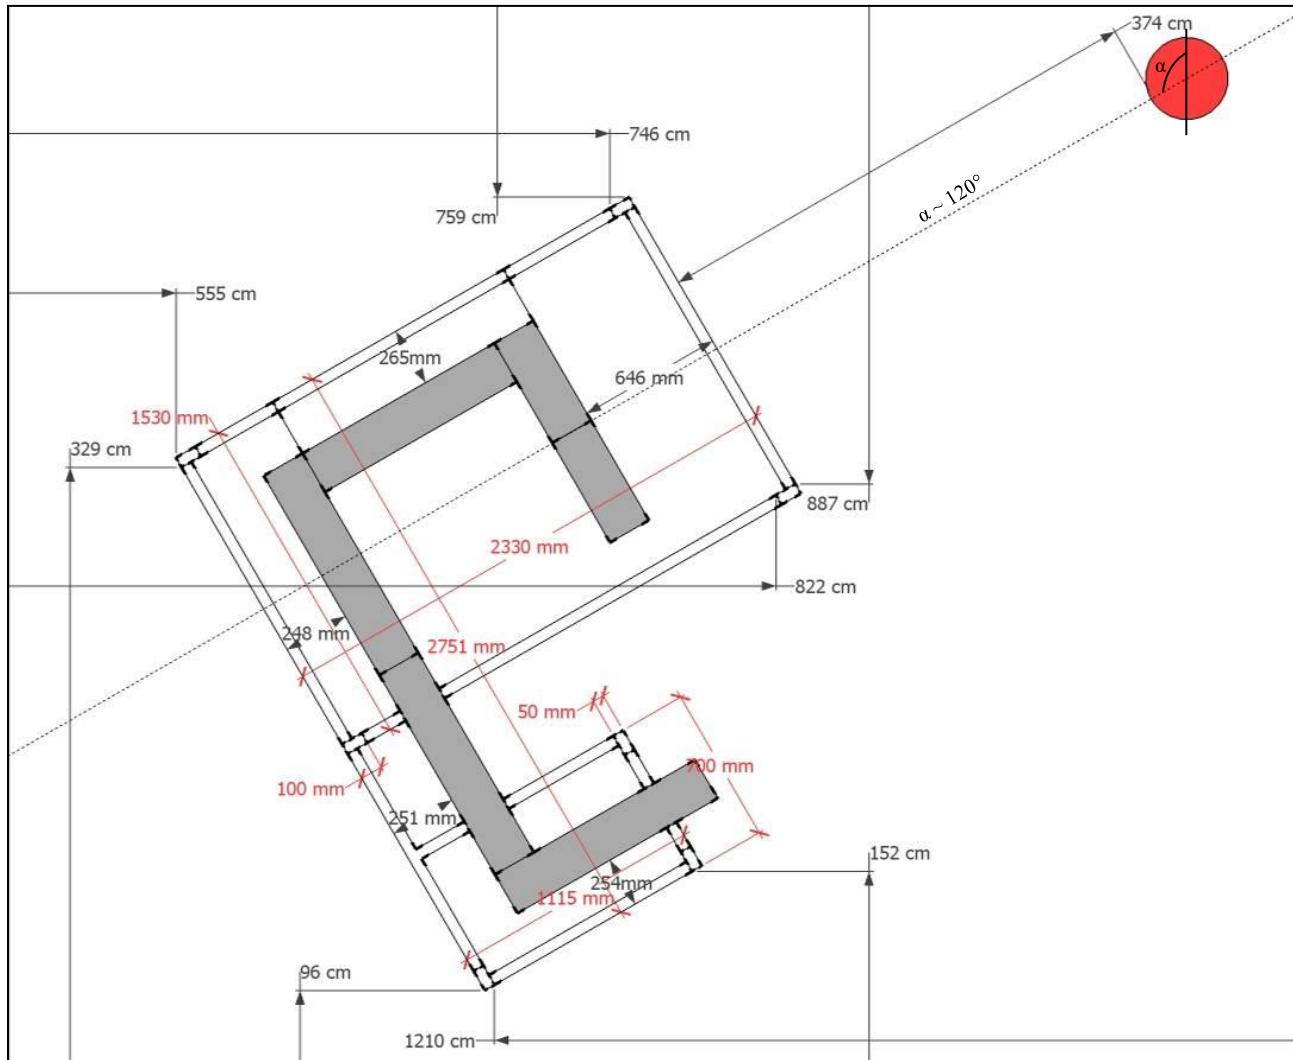


Fig. 1-42. Location of scattering box and stand within SILENE room.

ALARM-TRAN-AIR-SHIELD-001

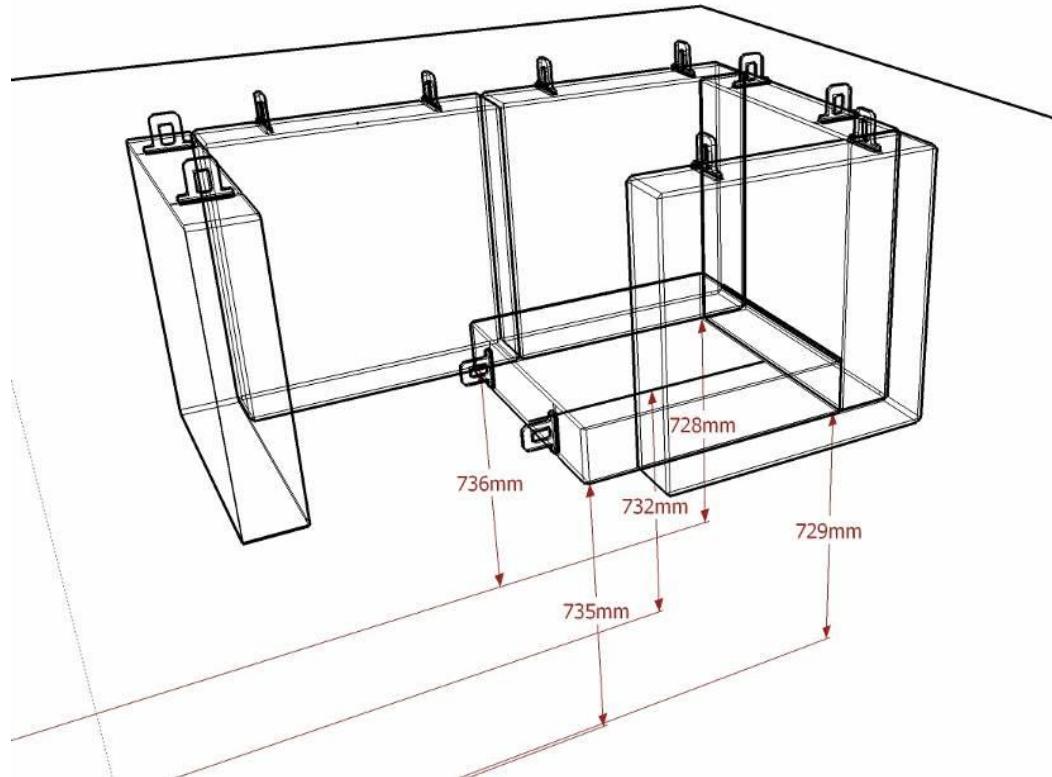


Fig. 1-43. Height of scattering box above SILENE room floor.

When the concrete shielding blocks were placed on the support stand to construct the scattering box, the blocks did not fit together perfectly. An example of this is shown in the photograph in Fig. 1-44. Figures 1-45 through 1-47 provide measurements of these gaps around the scattering box, and they show the 6 different concrete blocks that are assigned names. These names are used through the remainder of this evaluation. Blocks S1 and S2 are made of magnetite concrete, while blocks S3 through S6 are made of standard concrete.



Fig. 1-44. Gap between scattering box concrete blocks.

ALARM-TRAN-AIR-SHIELD-001

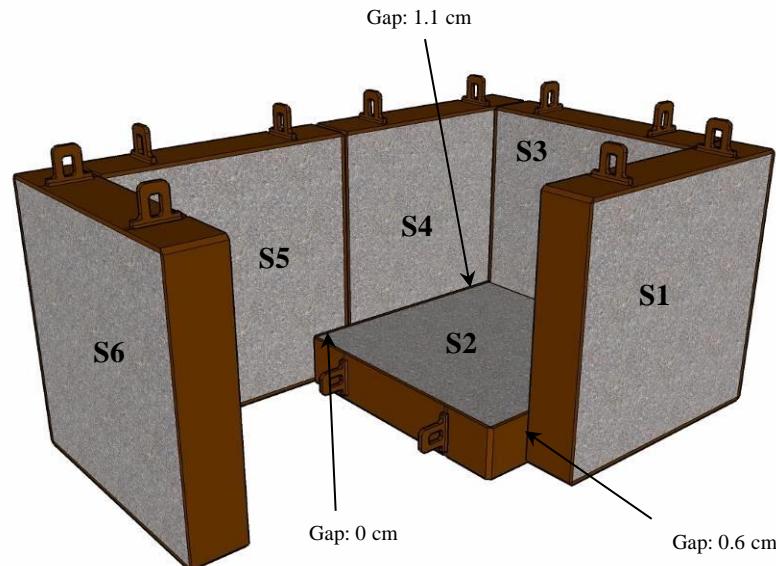


Fig. 1-45. Front of the scattering box with block names; gap dimensions in cm.

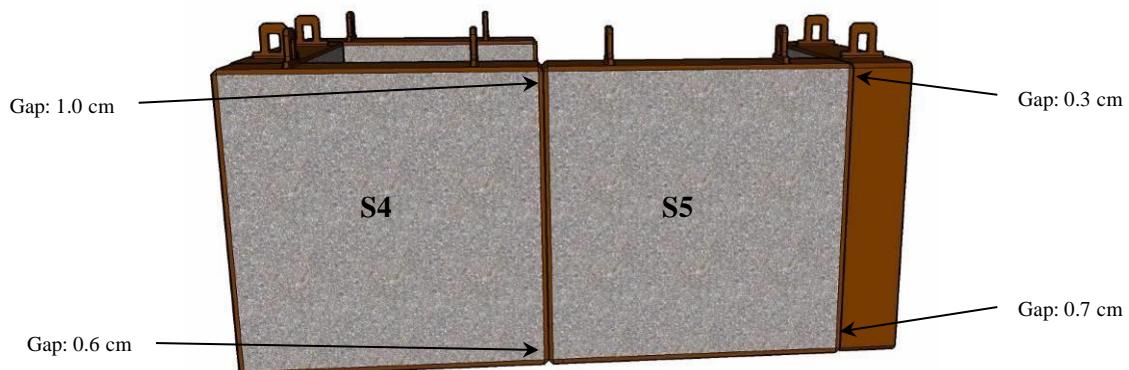


Fig. 1-46. Back of scattering box with block names; gap dimensions in cm.

ALARM-TRAN-AIR-SHIELD-001

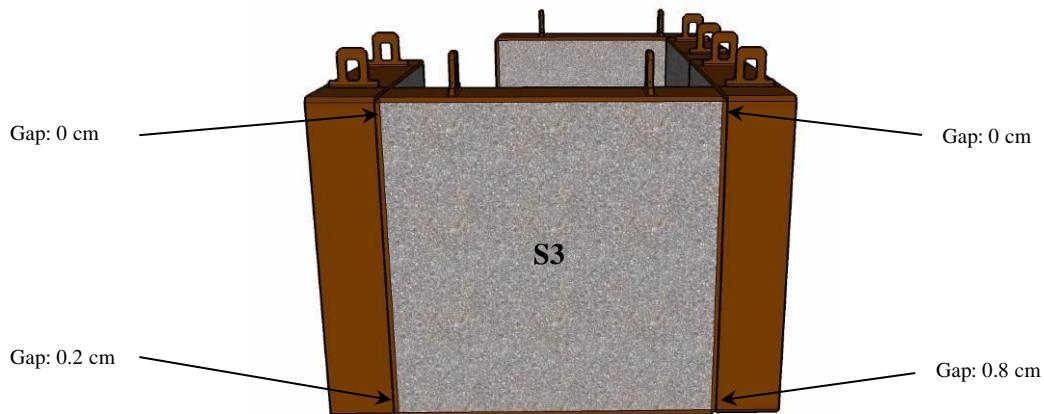


Fig. 1-47. Drawing of side of scattering box with block names; gap dimensions in cm.

1.2.7 Scattering Box Detector Mounting Plate – Neutron activation foils and TLDs were placed at four positions within the scattering box, referred to as scattering box positions 1 through 4 (SB1–SB4). The neutron activation foils and TLDs were mounted using two aluminum plates at each of these positions. Figure 1-48 shows the dimensions of one of these plates, Fig. 1-49 shows details about how the two plates were coupled together to support the detectors, and Fig. 1-50 is a photograph illustrating how these two plates were mounted to the scattering box.

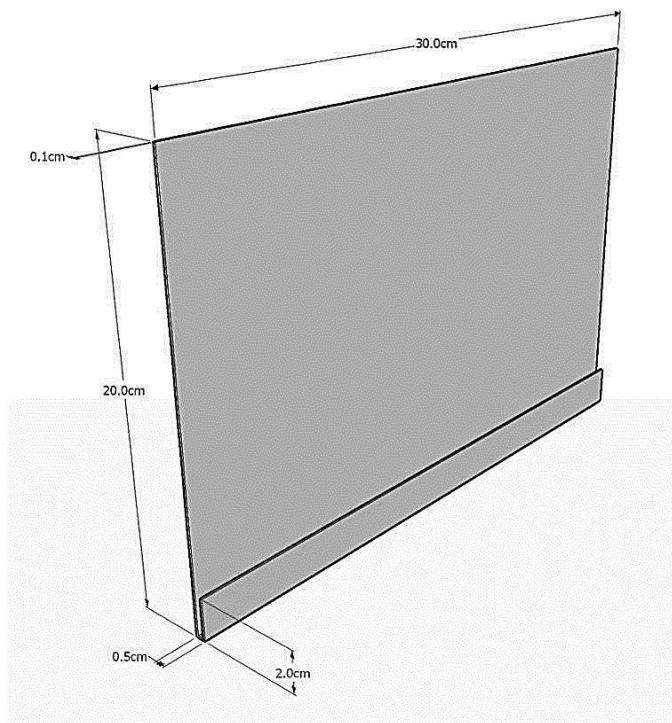


Fig. 1-48. Scattering box aluminum mounting plate.

ALARM-TRAN-AIR-SHIELD-001

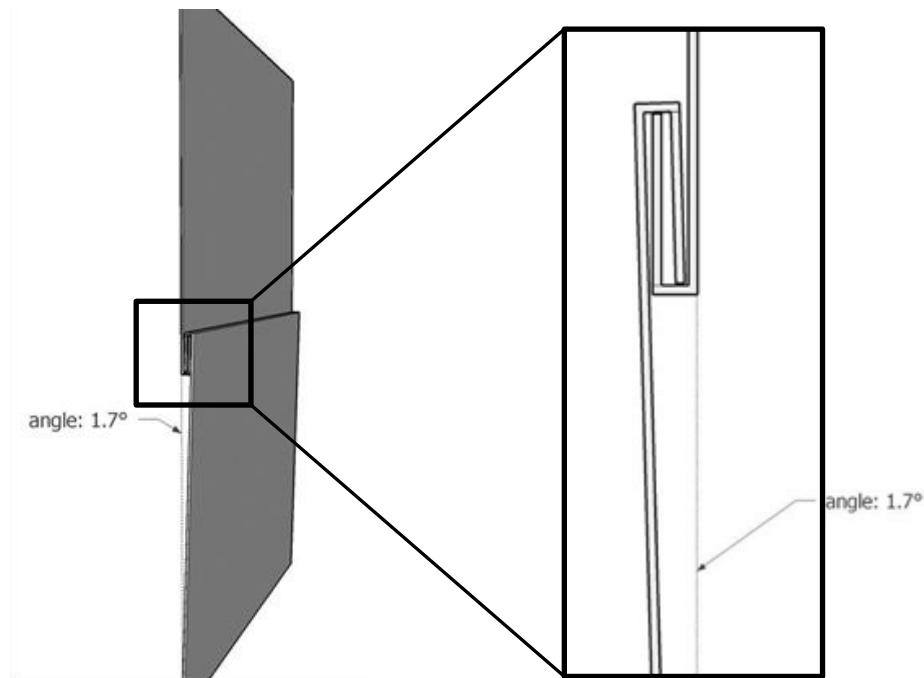


Fig. 1-49. Details of scattering box aluminum mounting plates.

ALARM-TRAN-AIR-SHIELD-001



Fig. 1-50. Plates mounted in the scattering box.

1.2.8 SILENE Diagnostics – As shown in the photographs of the SILENE room and Fig. 1-1, there is a lot of equipment in the room (aside from the critical assembly, collimators, scattering box, and free field stand) that is not described in this evaluation. This equipment does not have any direct involvement with generating the critical pulse or measuring the radiation field produced, and it is believed that most of this equipment will have a negligible impact on the neutron activation foil and TLD measurements. One possible exception is the diagnostic detectors housed in large cylinders of polyethylene across the room from collimators A and B, relatively close to the free field location. These diagnostics are not illustrated in the overview Fig. 1-2 and are just out of view to the left of Fig. 1-1. A photograph of these diagnostics and their stands is shown in Fig. 1-51. The polyethylene cylinders sit on top of a S235JR steel pedestal, which are both on top of a S235JR steel table. Dimensions in cm are given in Fig. 1-52, and Fig. 1-53 locates the diagnostics within the SILENE room.

ALARM-TRAN-AIR-SHIELD-001



Fig. 1-51. Detector diagnostics and stands.

ALARM-TRAN-AIR-SHIELD-001

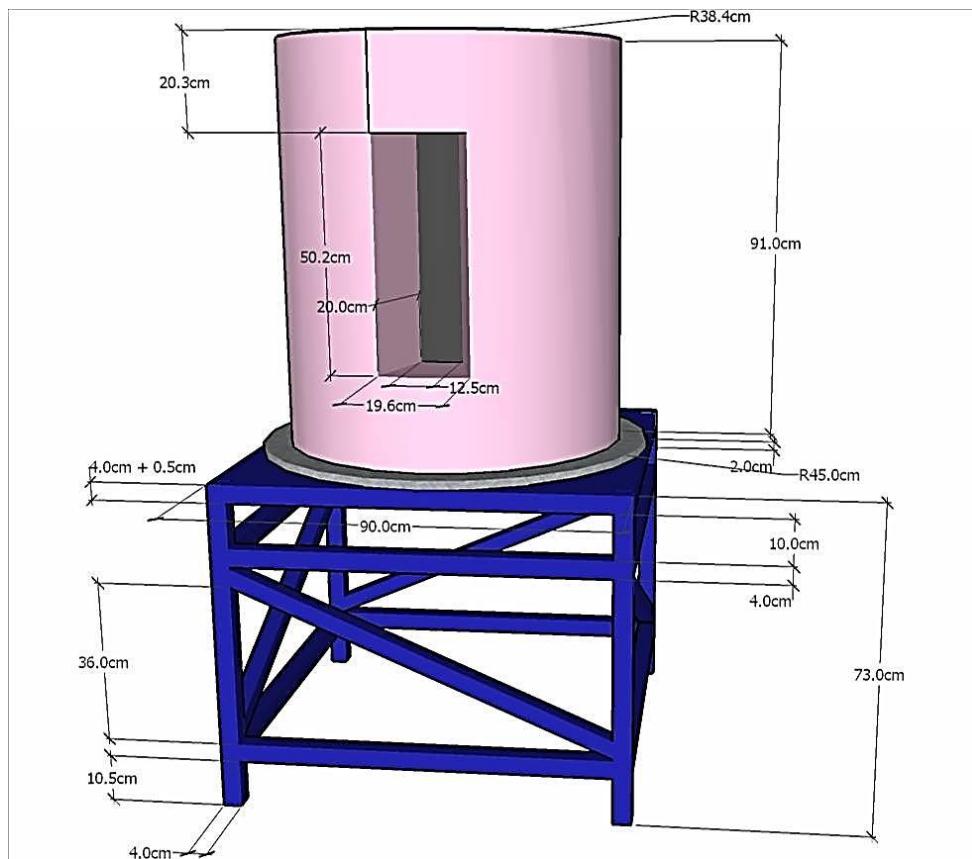


Fig. 1-52. Dimensions in cm of detector diagnostics and stands.

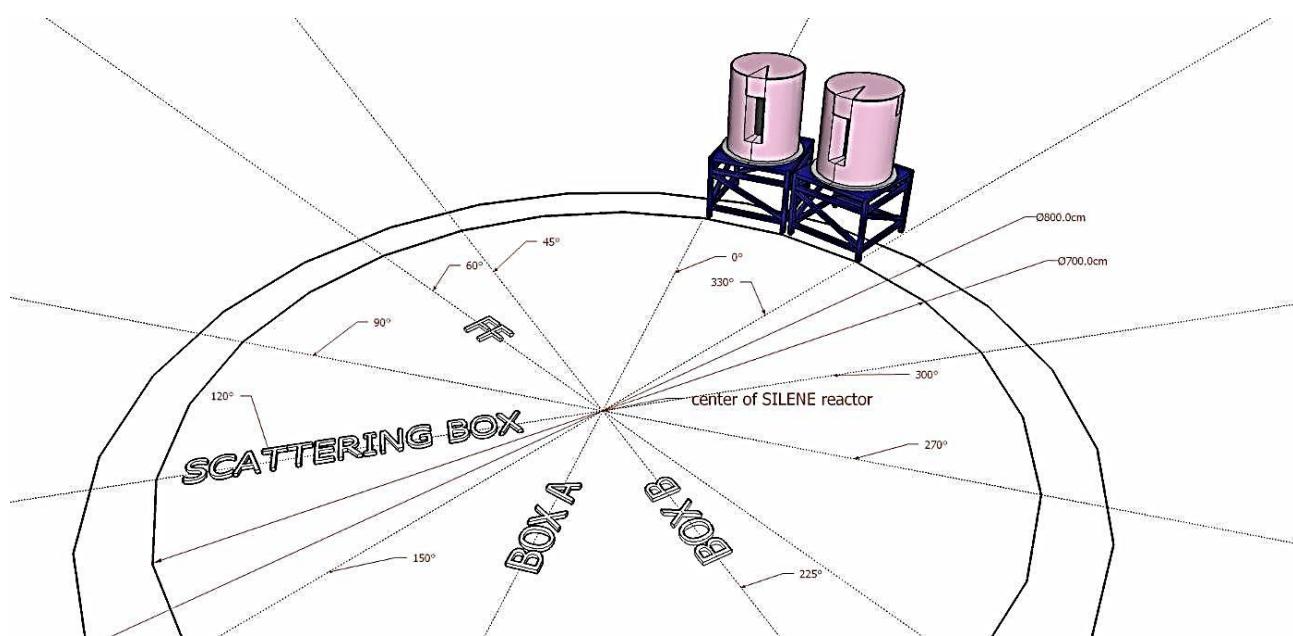


Fig. 1-53. Location of detector diagnostics and stands within SILENE room.

ALARM-TRAN-AIR-SHIELD-001

1.3 Description of Material Data

The following subsections provide details about the materials used in these experiments. Due to the importance of the source (SILENE critical assembly) and detectors (neutron activation foils and TLDs) in shielding benchmarks, these items are discussed in Sects. 1.4 and 1.5, respectively.

1.3.1 SILENE Room – The concrete used to construct the walls of the SILENE room are referred to as *SILENE concrete* for the remainder of this evaluation. The composition used for the SILENE concrete is given in Table 1-1. Valduc provided this composition, which is also published in Table 8.3.3 of the OECD NEA report 6285 published in 2009.^a However, in that report, the composition is provided as elemental number densities, with 4 significant figures (3 after the decimal point). Table 1-1 provides the composition using weight percent with enough significant figures to reproduce the values in NEA report 6285. The evaluators note that it is not unusual that the SILENE concrete is borated because it is being used as a neutron shield. However, it seems unusual that the SILENE concrete only contains ¹⁰B and no ¹¹B. The Valduc staff members stated that this boron content was added to the composition to represent all possible trace thermal neutron absorbers present in the concrete and that the amount of boron added is based upon comparisons of many experimentally measured values and simulated values. Furthermore, ¹¹B was not added as an additional indication that the ¹⁰B content has been estimated and not measured. This is sometime referred to as the ¹⁰B equivalent.

Table 1-1 SILENE concrete composition

Element	Weight percent
H	0.721398
¹⁰ B	0.001109
O	48.094243
Al	2.916255
Si	27.520212
Ca	17.803744
Fe	2.943039
Density	2.401318 g/cm ³

No measurement of the temperature, pressure, or humidity was made within the SILENE room during the experiments.

There are two sets of doors accessing the SILENE room: the outer concrete shield doors and the inner steel access doors. The outer concrete doors are made of SILENE concrete, Table 1-1, while the inner steel doors are made of a low carbon structural steel, S235JR. The composition of S235JR steel, according to the European Standard EN 10027-1, is given in Table 1-2.

^a Y. Miyoshi, et. al., “Inter-code Comparison Exercise for Criticality Excursion Analysis - Benchmark Phase I: Pulse Mode Experiments with Uranyl Nitrate Solution in the TRACY and SILENE Facilities,” OECD NEA No. 6285 (2009). Revision: 1

ALARM-TRAN-AIR-SHIELD-001

Table 1-2. Standard composition of S235JR steel

Element	Weight percent
C	≤ 0.17
N	≤ 0.012
P	≤ 0.035
S	≤ 0.035
Mn	≤ 1.4
Fe	Balance
Cu	≤ 0.55
Density	7.85 g/cm ³

1.3.2 Collimator Boxes – The stands that support the two collimator boxes (blue in Fig. 1-9) are made of S235JR steel as specified in Table 1-2. The layers of materials forming the collimator boxes from the outside to the inner cavity, including the support bar and small stand in Figs. 1-18 and 1-19, are stainless steel Z2 CN 18-10, PPB9, lead, copper, and stainless steel Z2 CN 18-10. Table 1-3 provides the composition of the stainless steel Z2 CN 18-10 used to construct the collimators. The equivalent US name for this material is *stainless steel 304L*. Note that this type of stainless steel is used throughout this experiment, and that this composition (analysis) only applies to the collimators. A copy of the analysis of the collimator box stainless steel Z2 CN 18-10 provided by Saclay is in Appendix H.

Table 1-3. Composition of Z2 CN 18-10 stainless steel for the collimator boxes

Element	Weight percent
C	0.02
N	0.049
Si	0.04
P	0.031
S	0.002
Cr	18.3
Mn	1.63
Fe	Balance
Ni	8.1
Density	7.7841 g/cm ³

PPB9 is a borated gypsum plaster (also known as plaster of Paris) that contains polyethylene granules or beads. The plaster is borated by the addition of the mineral colemanite. The composition of this material is given in Table 1-4, but the values in Table 1-4 warrant some explanation. The weight percentages reported with 2 digits beyond the decimal point (e.g., 8.08% hydrogen) were reported by the manufacturer, along with an “other” category. The manufacturer also reported the composition of the colemanite in the mixture. The composition of the colemanite was used to calculate the weight percentage of some of the minor elements the manufacturer had not reported on (4 digits beyond the decimal point), which results in a smaller “other” weight percentage in Table 1-4 than that reported by the manufacturer. A copy of the analysis of PPB9 provided by Valduc is in Appendix H.

ALARM-TRAN-AIR-SHIELD-001

Table 1-4. PPB9 composition after drying

Element	Weight percent
H	8.08
B	1.13
C	40.92
O	29.15
Mg	0.2532
Al	0.2222
Si	0.3489
S	7.98
K	0.0077
Ca	11.45
Sr	0.1578
Other	0.3002
Density	1.03 g/cm ³

1.3.3 Collimator B Shielding – The shield in front of collimator B in this experiment is made of barite concrete. The result of a chemical analysis performed by LERM for this concrete is given in Table 1-5. There are two important issues concerning the results of this analysis. First, no oxygen is listed in the analysis results. It is assumed that oxygen would make up the balance of this composition if not for the second issue. Second, there is no barium or sulfur listed in the LERM analysis results, which is a significant problem for this concrete because barite is barium sulfate (BaSO_4). The analysis report for this concrete observes that after the analysis was complete, an insoluble residue remained that likely consisted of barium sulfate, and in parentheses it is noted, “about 54%.” It is not clear if the entire barite concrete sample is 54 weight percent barium sulfate, if the remaining residue is 54 weight percent barium sulfate, or if the percentage sign is even referring to weight percentage. The density in Table 1-5 was measured by Soutrenon using a sample of concrete from the same batch, not the actual concrete shield block. The frame and lift points of this concrete shield are made of S235JR, as noted in Table 1-2. Copies of the data provided by LERM and Soutrenon are included in Appendix H.

ALARM-TRAN-AIR-SHIELD-001

Table 1-5. Barite concrete composition according to LERM analysis and density according to the manufacturer Soutrenon

Element	Weight percent
H	0.40
B	< 0.1
C	0.30
O	Unreported
Na	0.04
Mg	0.13
Al	0.71
Si	7.24
P	0.04
S	Unreported
Cl	< 0.01
K	0.25
Ca	6.65
Ti	0.04
Cr	0.01
Mn	0.07
Fe	1.08
Sr	0.84
Ba	Unreported
Density	3.25 g/cm ³

1.3.4 Foil Holders – The neutron activation foils inside the collimator boxes and at the free field location are inside the foil holder in Fig. 1-28. This holder is made of aluminum alloy AG3M; the standard composition for AG3M is provided in Table 1-6.

Table 1-6. Standard composition of AG3M aluminum

Element	Weight percent (%)
Mg	2.6–3.6
Al	Balance
Si	≤ 0.4
Ti	≤ 0.15
Cr	≤ 0.3
Mn	≤ 0.5
Fe	≤ 0.4
Cu	≤ 0.1
Zn	≤ 0.2
Density	2.685 g/cm ³

1.3.5 Free Field Location – No information is available about the exact compositions of the free field location stand.

ALARM-TRAN-AIR-SHIELD-001

1.3.6 Scattering Box – The stand that supports the scattering box (Figs. 1-36 and 1-37) is made of S235JR steel, like the collimator boxes. This composition is defined in Table 1-2. The concrete shield blocks used to construct the scattering box are the same as the one shielding collimator B, except that the concrete composition is different. The results of a chemical analysis performed by LERM on the magnetite and standard concrete used to construct the scattering box are presented in Tables 1-7 and 1-8, respectively. As with the barite concrete shielding collimator B, no results for oxygen were reported, so the balance of the composition is assumed to be oxygen. The densities in Tables 1-7 and 1-8 were measured by Soutrenon using samples of these concretes from the same batch, not the actual concrete shield blocks. Copies of the data provided by LERM and Soutrenon are included in Appendix H.

Table 1-7. Magnetite concrete composition according to LERM analysis and density according to the manufacturer Soutrenon

Element	Weight percent
H	0.32
B	< 0.1
C	0.36
O	Unreported
Na	0.22
Mg	0.56
Al	0.52
Si	2.72
P	0.45
Cl	< 0.01
K	0.28
Ca	5.79
Ti	0.17
Cr	0.03
Mn	0.18
Fe	54.94
Sr	0.02
Density	3.90 g/cm ³

ALARM-TRAN-AIR-SHIELD-001

Table 1-8. Standard concrete composition according to LERM analysis and density according to the manufacturer Soutrenon

Element	Weight percent
H	0.64
B	< 0.1
C	0.62
O	Unreported
Na	1.57
Mg	0.75
Al	6.04
Si	27.02
P	0.10
Cl	< 0.01
K	3.32
Ca	8.67
Ti	0.23
Cr	0.01
Mn	0.04
Fe	1.99
Sr	0.03
Density	2.30 g/cm ³

1.3.7 Scattering Box Detector Mounting Plate – No chemical analysis has been performed on the detector mounting plates within the scattering box.

1.3.8 SILENE Diagnostics – The exact composition of the polyethylene moderator surrounding each SILENE diagnostic detector is unknown. These cylindrical moderators sit atop a small steel pedestal and steel table. The table is known to be S235JR steel (Table 1-2). The composition of the small pedestal is unknown.

1.4 Description of the Source

The source of primary neutrons and photons in this experiment is the critical pulse produced by the SILENE assembly. This section provides the necessary geometric and material information about the source, SILENE. This is a simplified description of the actual assembly, which helps reduce the effort required to model the assembly. The intensity of the source is discussed in Sect. 1.7 as one of the measured values of this experiment. The spatial and energy dependence of the source is discussed in Sect. 4.0; these were not measured, so they must be calculated as part of this benchmark.

1.4.1 SILENE Dimensions – The SILENE critical assembly is an annulus (concentric cylinders). The inner cylinder is a central void where the control rod is located. The cadmium control rod is an annulus as well. The outer cylinder of SILENE is broken into upper and lower portions, each of which has a different outside radius. The upper portion of this cylinder is where the uranyl nitrate solution is located during all experiments. Two plates of steel form a short pedestal that slightly lifts SILENE off the concrete floor of the experiment room. The first of these rests directly on the concrete floor and is not cylindrical but is rectangular. On top of this is a cylindrical plate of steel. Figure 1-54 is a photograph of SILENE from this experiment, and Fig. 1-55 illustrates the dimensions and materials of the simplified description of SILENE.

ALARM-TRAN-AIR-SHIELD-001



Fig. 1-54. Bare SILENE.

ALARM-TRAN-AIR-SHIELD-001

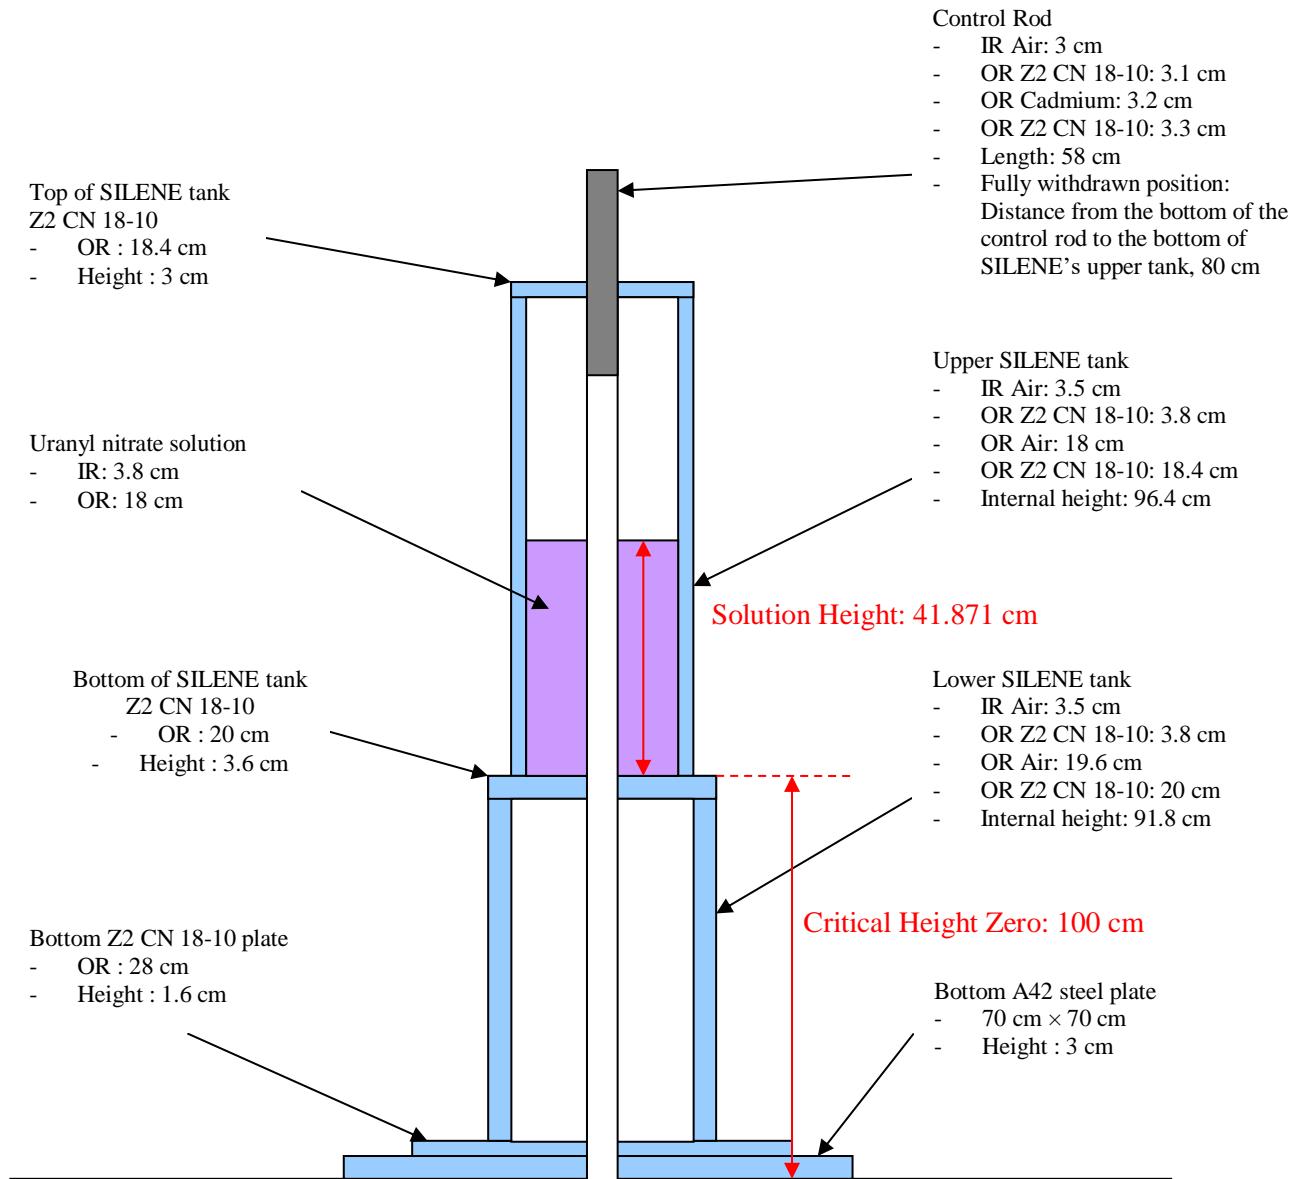


Fig. 1-55. Simplified SILENE geometry.

The lower lead ring, which is not shown in Fig. 1-55, is the orange material visible in Figs. 1-1 and 1-54. It can be seen in more detail in Fig. 1-56. The bottom of the lower lead ring is 58.5 cm above the concrete floor. Figure 1-56 also shows the length of the curves that form the inner and outer radius of the lower lead ring, 21 and 42 cm, respectively. As discussed above, collimator A sits approximately on the 180° line of the SILENE room (Figs. 1-2 and 1-53), which is used to mark the orientation of the lower lead ring in Fig. 1-56.

ALARM-TRAN-AIR-SHIELD-001

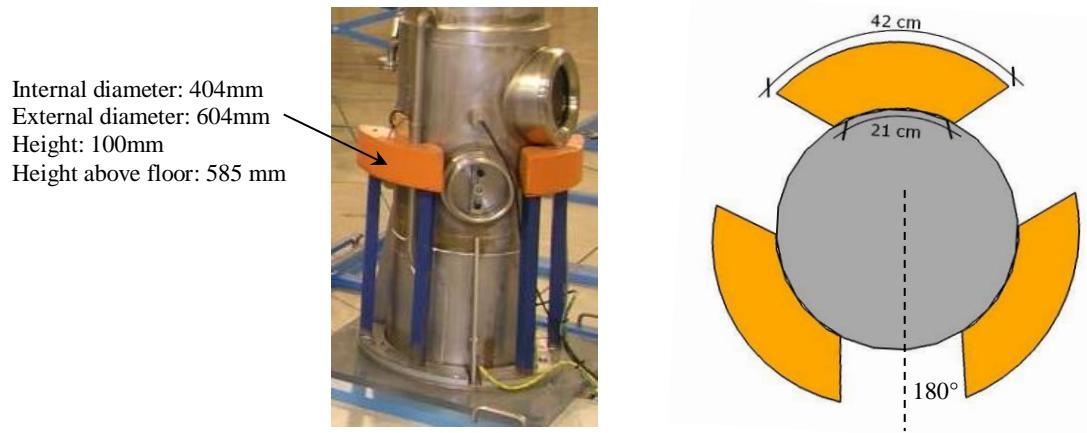


Fig. 1-56. SILENE lower lead ring.

1.4.2 SILENE Materials – Figure 1-55 identifies the dimensions and materials used to construct the SILENE assembly. The majority of the reactor is made of Z2 CN 18-10 stainless steel. The standard composition of Z2 CN 18-10 stainless steel is given in Table 1-9. This is the composition of Z2 CN 18-10 stainless steel to be used throughout this benchmark except for collimator boxes.

Table 1-9. Standard composition of Z2 CN 18-10 stainless steel

Element	Weight percent
C	≤ 0.03
Si	≤ 1
P	≤ 0.04
S	≤ 0.03
Cr	17 -19
Mn	≤ 2
Fe	Balance
Ni	9-11
Density	7.9 g/cm ³

The square steel plate that rests directly on the concrete floor of the room and supports the SILENE assembly is made of A42 steel. The standard composition of A42 steel is given in Table 1-10.

Table 1-10. Standard composition of A42 steel

Element	Weight percent
C	≤ 0.25
N	≤ 0.009
P	≤ 0.062
S	≤ 0.062
Fe	Balance
Density	7.85 g/cm ³

An analysis of the lower lead ring composition has not been performed explicitly. However, analysis of similar high purity lead used in other experiments at Valduc is shown in Table 1-11.

ALARM-TRAN-AIR-SHIELD-001

Table 1-11. Analysis of Valduc high purity lead

Element	Sample A (ppm)	Sample B (ppm)
B	< 0.005	< 0.005
Mg	< 0.005	< 0.005
Al	0.04	0.12
Ca	< 0.01	< 0.01
Ti	< 0.005	< 0.005
V	< 0.001	< 0.001
Cr	< 0.005	0.03
Mn	< 0.001	< 0.001
Fe	0.25	0.32
Co	< 0.005	< 0.005
Ni	0.71	0.80
Cu	5.0	2.7
Zn	< 0.01	< 0.01
As	< 0.005	< 0.005
Zr	< 0.005	< 0.005
Mo	< 0.005	< 0.005
Ag	12	18
Cd	< 0.05	< 0.05
Sn	< 0.05	< 0.05
Sb	0.07	0.14
Ba	< 0.005	< 0.005
Bi	170	240
Pb	Balance	Balance
Density		11.19 g/cm ³

1.4.3 Uranyl Nitrate Solution – The fuel used in the SILENE reactor is a uranyl nitrate solution often presented as being enriched up to 93.5 weight percent ²³⁵U. The result of a finer analysis of the uranium isotopic composition performed in 1999 is shown Table 1-12. A copy of the report provided by Valduc concerning the fuel enrichment is provided in Appendix H. Note that this report in 1999 was produced the last time the uranyl nitrate solution was reprocessed, therefore the actual uranium atom percentages in this experiment are different from those in Table 1-12. During the experiment, additional fission products and daughters of fission products are produced in the solution.

Table 1-12. Isotopic composition of uranyl nitrate solution in 1999

Element	Atom percent	Uncertainty
²³⁴ U	0.5891	0.001
²³⁵ U	92.6857	0.020
²³⁶ U	0.2519	0.001
²³⁸ U	6.4733	0.005

Before this experiment was conducted, an analysis of the uranyl nitrate solution was performed to determine the uranium concentration, density, and molarity of the solution. The results of the analysis performed on September 8, 2010, are presented in Table 1-13. A copy of the report provided by Valduc concerning the analysis of the uranyl nitrate solution is provided in Appendix H.

ALARM-TRAN-AIR-SHIELD-001

**Table 1-13. Results of the September 8, 2010
uranyl nitrate solution analysis**

Measurement	Results $\pm \sigma$
Density	1.15624 g/cm ³ \pm 0.00003
Uranium Concentration	70.36 g/L \pm 0.05
H ⁺ Molarity	1.91 moles/L \pm 0.03
NO ₃ ⁻ Molarity	2.51 moles/L \pm 0.03

A few other experiments were performed with the SILENE assembly between September 6, 2010 (the date the sample in Table 1-13 was taken to be analyzed) and October 11, 2010, so it is likely that the parameters reported in Table 1-13 had changed by the time of this experiment. Regulations governing the operation of SILENE require that the uranium concentration of the solution used in experiments be 71 g/L \pm 1 g/L. Therefore, the SILENE operators occasionally check the uranium concentration of the solution using what they call a *volume measurement technique*, and the fuel concentration is adjusted by adding fuel solution or nitric acid to increase or decrease the uranium concentration. The results of such a check performed on October 18, 2010 reported a uranium concentration of 70.96 g/L.

1.5 Description of the Detectors

Several types of detectors were used during this experiment. For the purposes of this benchmark, only the neutron activation foils and TLDs will be considered because these detector types measured benchmark quality data. A summary of the performance of the CIDAS MkX and Rocky Flats NCD-91 CAAS detectors is presented in Appendix G.

1.5.1 Neutron Activation Foil Dimensions – Table 1-14 presents the dimensions and masses of each neutron activation foil used in this experiment. Regarding diameter, all the foils with A10 in the reference name have a manufacturing tolerance of 0.2 mm on their diameters, and all other foils have a diameter tolerance of 0.5 mm. Regarding thickness, every foil presented in Table 1-14 has a 10% manufacturing tolerance on its thickness. These tolerances on foil dimensions produce larger uncertainties than the uncertainties associated with measurements by a micrometer. The experimentalist and evaluators recognize that more care should have been taken to reduce these dimension uncertainties for the foils with thermal neutron activation products. The uncertainty of the masses reported in Table 1-14 is 0.2 %. In Table 1-14, no mass is reported for the titanium foil because no activation products in the titanium foil were measured as part of this benchmark, so no mass measurement was performed. The analysis column in Table 1-14 identifies which chemical analysis in Sect. 1.5.2 applies to each foil.

ALARM-TRAN-AIR-SHIELD-001

Table 1-14. Dimensions and masses of neutron activation foils

Location	Reference name	Thickness (mm)	Diameter (mm)	Mass (g)	Analysis
Case 1 Collimator A	Au05-A10	0.25	20	1.547	Goodfellow [2]
	Ni011	2	20	5.808	FILAB [4]
	In005	1	20	2.328	FILAB [1]
	Fe021	3	20	7.286	FILAB [2]
	Mg032	2	20	1.091	FILAB [6]
	Co013	2	20	5.813	FILAB [5]
	Ti	2	20	---	---
Case 2 Collimator B	Au08-A10	0.25	20	1.537	Goodfellow [2]
	Ni029	2	20	5.769	FILAB [4]
	In006	1	20	2.333	FILAB [1]
	Fe029	3	20	7.294	FILAB [2]
	Mg030	2	20	1.084	FILAB [6]
	Co019	2	20	5.816	FILAB [5]
	Ti	2	20	---	---
Case 3 Free field	Au09-A10	0.25	20	1.543	Goodfellow [2]
	Ni016	1	20	2.807	FILAB [3]
	In008	1	20	2.335	FILAB [1]
	Fe028	3	20	7.292	FILAB [2]
	Mg029	2	20	1.089	FILAB [6]
	Co016	2	20	5.813	FILAB [5]
	Ti	2	20	---	---
Case 4 Scattering box 1	Au001	0.25	20	1.584	Goodfellow [1]
	Ni018	2	20	5.754	FILAB [4]
	In09-A10	1	20	2.448	Goodfellow [4]
	Fe020	3	20	7.279	FILAB [2]
	Mg006	2	20	1.082	FILAB [6]
	Co023	2	20	5.807	FILAB [5]
	Ti	2	20	---	---
Case 5 Scattering box 2	Au07-A10	0.25	20	1.545	Goodfellow [2]
	Ni013	2	20	5.788	FILAB [4]
	Co026	2	20	5.810	FILAB [5]
Case 6 Scattering box 3	Au10-A10	0.25	20	1.557	Goodfellow [2]
	Ni015	2	20	5.801	FILAB [4]
	Co022	2	20	5.814	FILAB [5]
Case 7 Scattering box 4	Au03-A10	0.25	20	1.558	Goodfellow [2]
	Ni024	2	20	5.780	FILAB [4]
	Co009	2	20	5.791	FILAB [5]

1.5.2 Neutron Activation Foil Materials – A chemical analysis was performed for each lot of neutron activation foils. Table 1-14 identifies which analysis results apply to each activation foil. Table 1-15 through Table 1-23 present the results of each analysis referenced in Table 1-14. Since the titanium foil was not used to produce benchmark data for this experiment, no chemical analysis was performed for titanium.

ALARM-TRAN-AIR-SHIELD-001

Table 1-15. Results of Goodfellow [1] chemical analysis

Elements	ppm
Fe	1
Cu	1
Ag	2
Au	99.999 wt%

Table 1-16. Results of Goodfellow [2] chemical analysis

Elements	ppm
Na	3
Cu	9
Rh	4
Pt	7
Au	99.997 wt%

Table 1-17. Results of Goodfellow [4] chemical analysis

Elements	ppm
Ni, Cu, Zn, Cd,	< 0.5
Fe, As, Ag, Pb	< 1
In	99.999 wt%
Sn	4
Tl	3

Table 1- 18. Results of FILAB [1] chemical analysis

Elements	Weight percent
Ag, As, B, Ba, Be, Ca, Cd, Co, Cr, Cu, Fe, Ga, K, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Sb, Sn, Ti, Tl, V, Zn	< 0.001
Al, Si	< 0.005
In	99.96

Table 1-19. Results of FILAB [2] chemical analysis

Elements	Weight percent
Ag, Ba, Be, Cd, Ga, K, Li, Mg, Mo, Na, Nb, Pb, Pd, Se, Ti, V, Zn, Zr	< 0.001
Ca	< 0.005
Al	0.025
Si	0.013
P	0.009
S	0.008
Cr	0.007
Mn	0.31
Fe	99.58
Co	0.002
Ni	0.004
Cu	0.006
As	0.002
Sn	0.005

Table 1- 20. Results of FILAB [3] chemical analysis

Elements	Weight percent
Ag, As, Ba, Be, Bi, Cd, Co, Cu, K, Mo, Na, Nb, P, Pb, Sb, Sn, Sr, V, W, Zn, Zr	< 0.001
B	0.0017
Mg	0.085
Al	0.005
Si	0.015
Ca	0.022
Ti	0.04
Cr	0.008
Mn	0.095
Fe	0.013
Ni	99.69

Table 1-21. Results of FILAB [4] chemical analysis

Elements	Weight percent
Ag, As, B, Ba, Be, Bi, Cd, K, Mo, Na, Nb, P, Pb, Sn, Sr, V, W, Zn, Zr	< 0.001
Mg	0.013
Al	0.013
Si	0.035
Ca	0.008
Ti	0.029
Cr	0.003
Mn	0.10
Fe	0.056
Co	0.034
Ni	99.68
Cu	0.003

ALARM-TRAN-AIR-SHIELD-001

Table 1-22. Results of FILAB [5] chemical analysis

Elements	Weight Percent
Ag, Al, As, B, Ba, Be, Bi, Cd, Cr, Cu, K, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Sb, Si, Sn, Sr, Ta, Ti, V, Zn, Zr	< 0.001
Al, Si	< 0.005
Ca	0.008
Fe	0.003
Co	99.95

Table 1-23. Results of FILAB [6] chemical analysis

Elements	Weight Percent
Ag, As, B, Ba, Be, Bi, Ca, Cd, Co, Cr, K, Mo, Na, Nb, P, Sb, Sn, Ti, V, W, Y, Zr	< 0.001
Al	< 0.005
Mg	99.93
Si	0.006
Mn	0.032
Fe	0.003
Ni	0.001
Cu	0.002
Zn	0.002
Pb	0.002

1.5.3 TLD Dimensions – Three different types of TLDs were used in this experiment: (1) an Al_2O_3 powder TLD provided by Valduc, (2) a Harshaw Beta-Gamma dosimeter with three TLD-700 and one TLD-600 LiF chips, and (3) a Harshaw DXT dosimeter with a single TLD-707H LiF chip. The Harshaw TLDs were provided by ORNL. The Valduc TLD was calibrated to air kerma due to ^{60}Co while ORNL's calibration was for air kerma due to ^{137}Cs . Measurement results from all three dosimeters will be presented in the benchmark, but only the Valduc Al_2O_3 TLD will be described in full detail. Section 2.0 explains that it is unnecessary to include the Al_2O_3 TLD body and powder in the benchmark model, but this TLD will be described to provide a more complete benchmark model and because its geometry is simple. The Valduc Al_2O_3 TLD powder is held inside a cylindrical container. A drawing of this container is shown in Fig. 1-57.

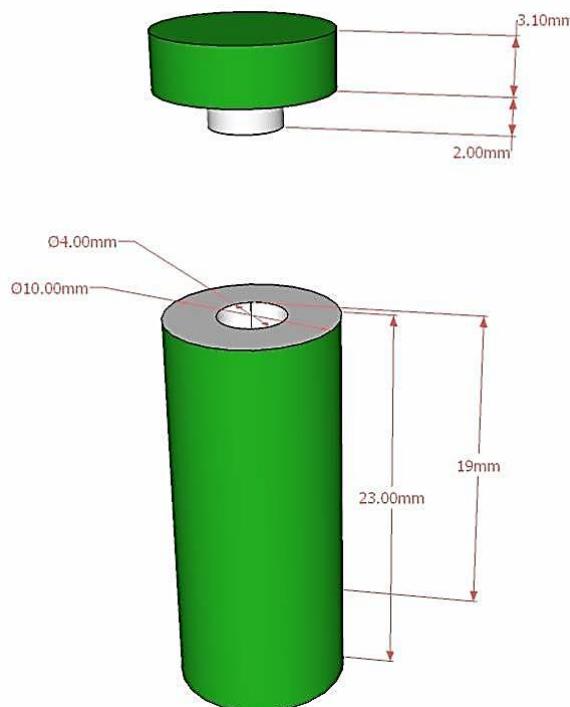


Fig. 1-57. Valduc Al_2O_3 TLD container.

ALARM-TRAN-AIR-SHIELD-001

1.5.4 TLD Materials – The Valduc Al₂O₃ TLD container is made of AU4G aluminum alloy, and the standard composition of this aluminum alloy is presented in Table 1-24.

Table 1-24. Standard composition of AU4G aluminum alloy

Element	Weight percent
Mg	0.4–1.0
Al	Balance
Si	0.3–0.8
Ti + Zr	≤ 0.2
Cr	≤ 0.1
Mn	0.3–0.8
Fe	≤ 0.5
Cu	3.5–3.7
Zn	≤ 0.2
Density	2.8 g/cm ³

No analysis was performed to determine the impurity composition of the Al₂O₃ TLD powder, so this powder is assumed to be 100 percent pure. The average mass of TLD powder in one of these containers was calculated from the measurement results of 10 samples, which was determined to be 432 mg ± 30 mg (2σ).

1.5.5 Detector Locations and Configurations – The discussion of detector locations and configurations will be broken into two sections: one for the scattering box locations and one for all the other locations.

1.5.5.1 Collimator and Free Field Detector Locations and Configurations – The same configuration of the neutron activation foils within the foil holders was used in both collimators and at the free field location. The photograph in Fig. 1-28 shows an example of this configuration. A photograph of the detector configuration within collimator A is shown in Fig. 1-58, and Fig. 1-59 provides dimensions to locate the detectors inside of collimator A. These figures for collimator A are followed by Figs. 1-60 and 1-61, which provide the same information for collimator B.

ALARM-TRAN-AIR-SHIELD-001



Fig. 1-58. Collimator A detector configuration.

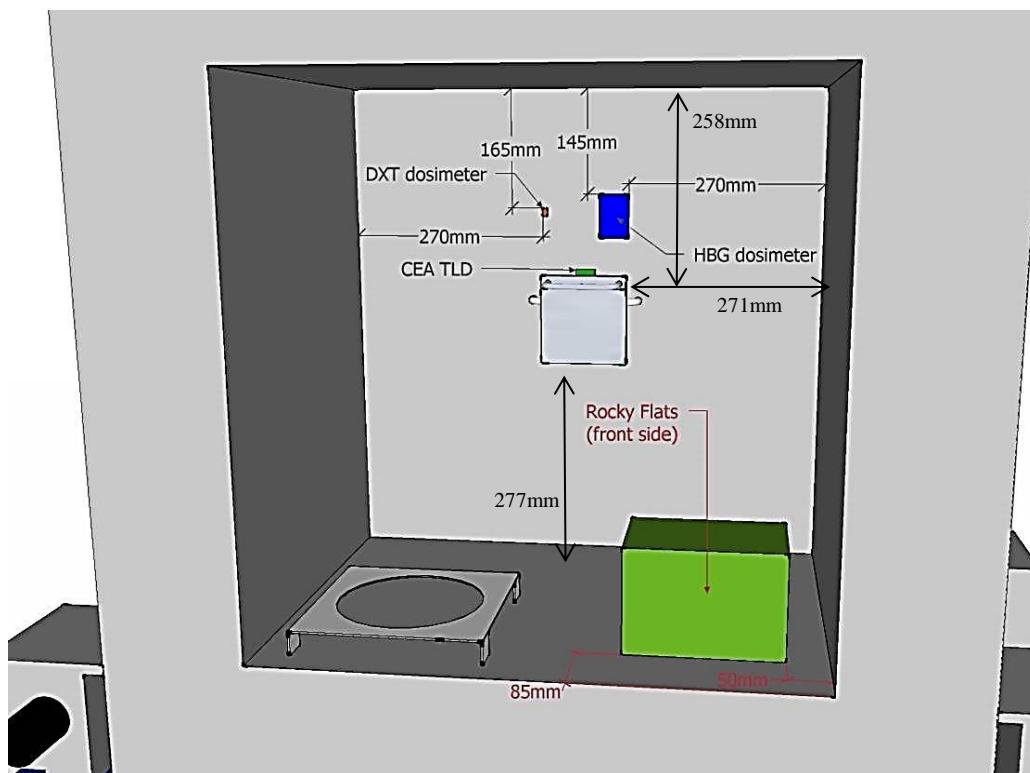


Fig. 1-59. Detector locations within collimator A.

ALARM-TRAN-AIR-SHIELD-001



Fig. 1-60. Collimator B detector configuration.

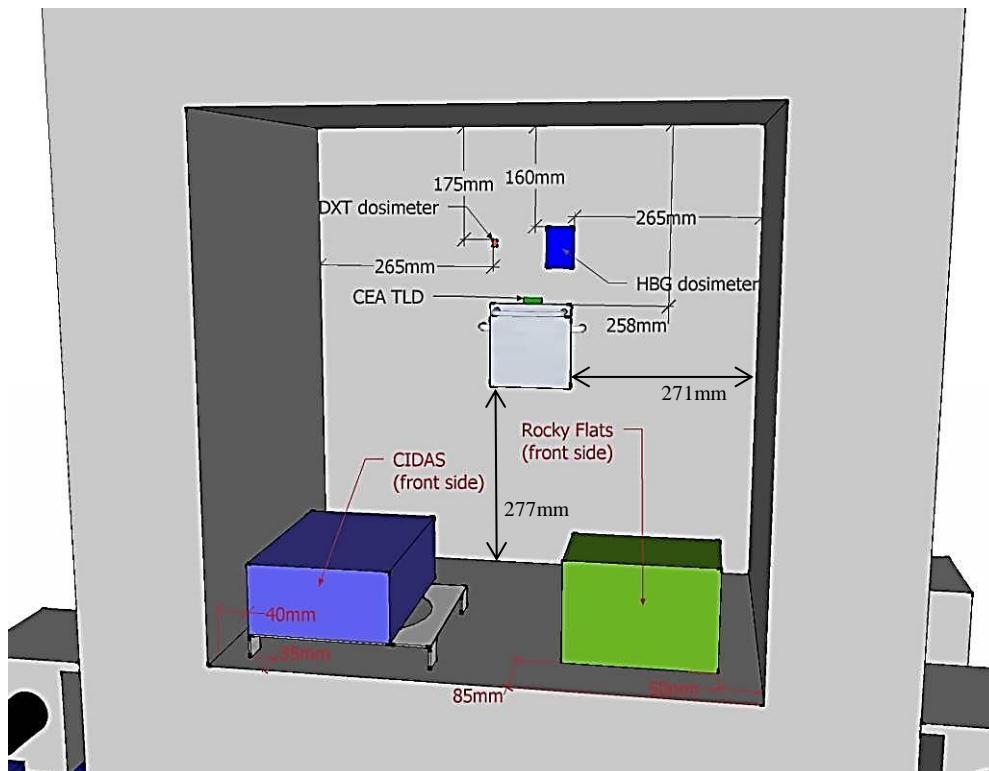


Fig. 1-61. Detector locations within collimator B.

ALARM-TRAN-AIR-SHIELD-001

Similar to the previous figures in this section, Fig. 1-62 shows a photograph of the detectors at the free field location, and Figs. 1-63 and 1-64 show dimensions to locate the detectors on the support stand.



Fig. 1-62. Free field detector configuration.

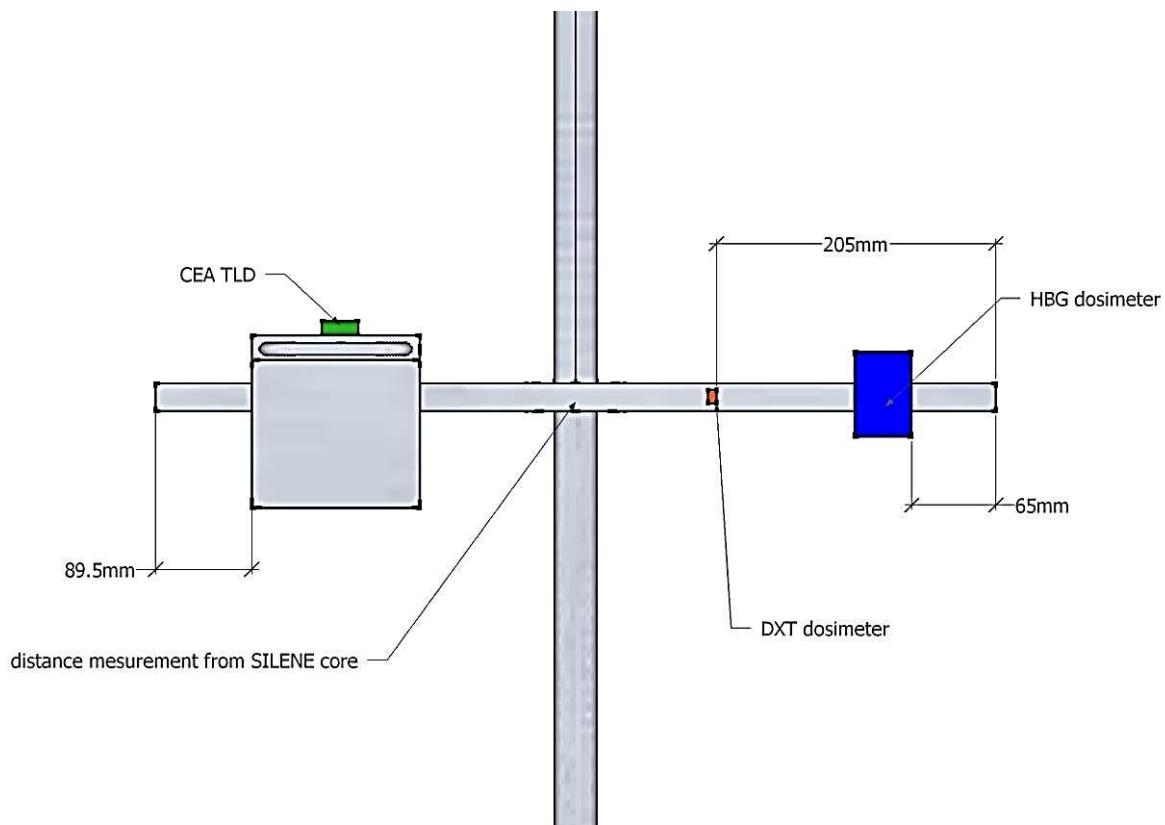


Fig. 1-63. Detector locations on the free field stand.

ALARM-TRAN-AIR-SHIELD-001

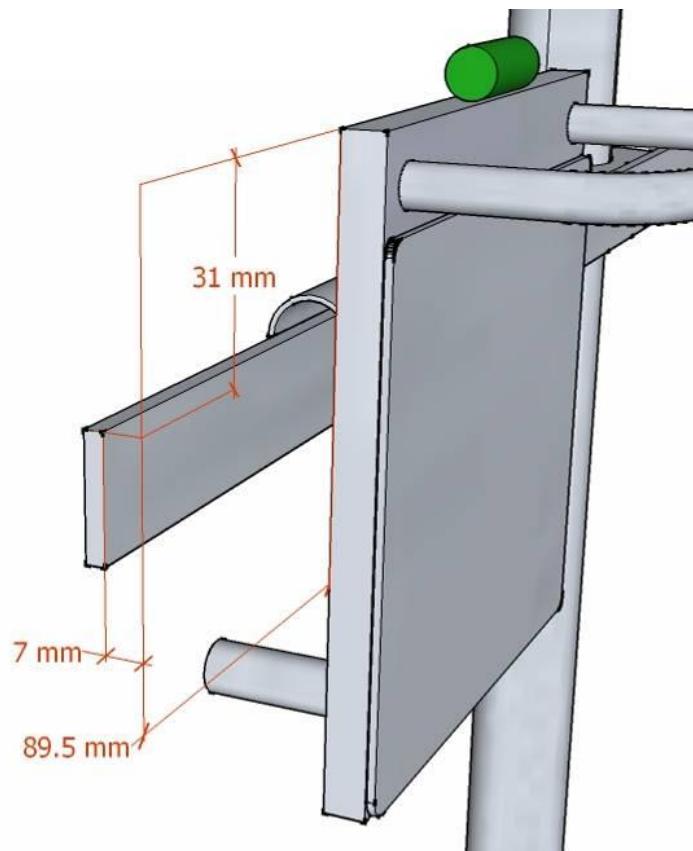


Fig. 1-64. Detail of the free field neutron activation foil holder.

1.5.5.2 Scattering Box Detector Locations and Configurations – Scattering box positions 1 through 4 (SB1 – SB4) are located with dimensions in Figs. 1-65 through 1-68.

ALARM-TRAN-AIR-SHIELD-001

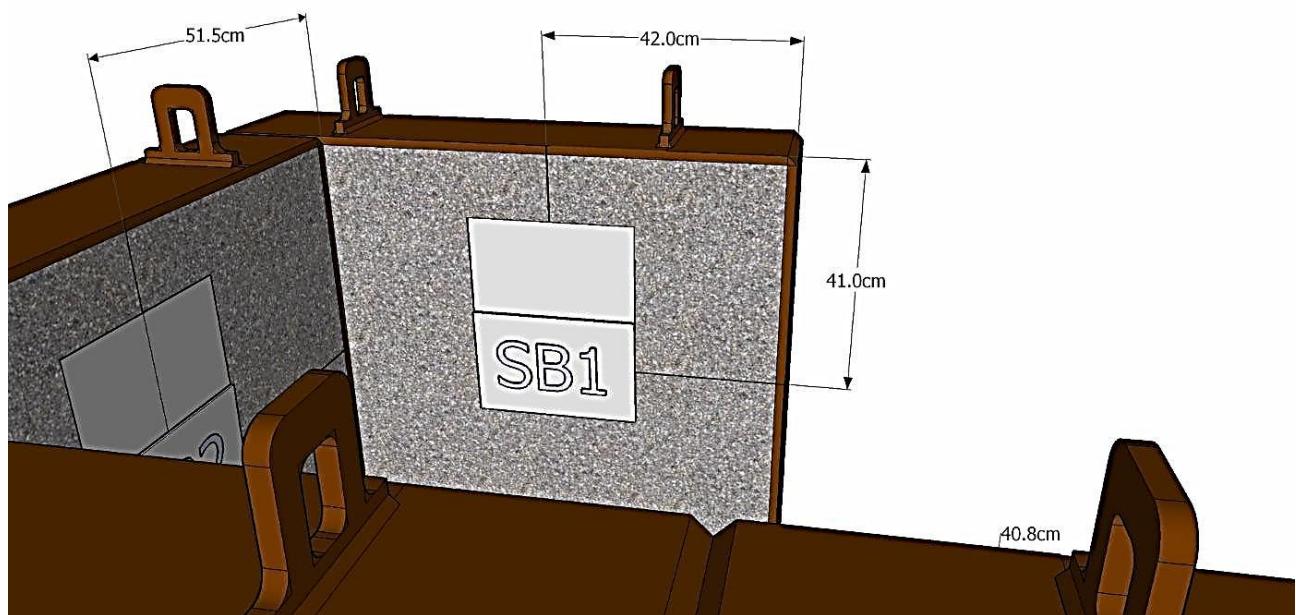


Fig. 1-65. Scattering box position 1 dimensions.

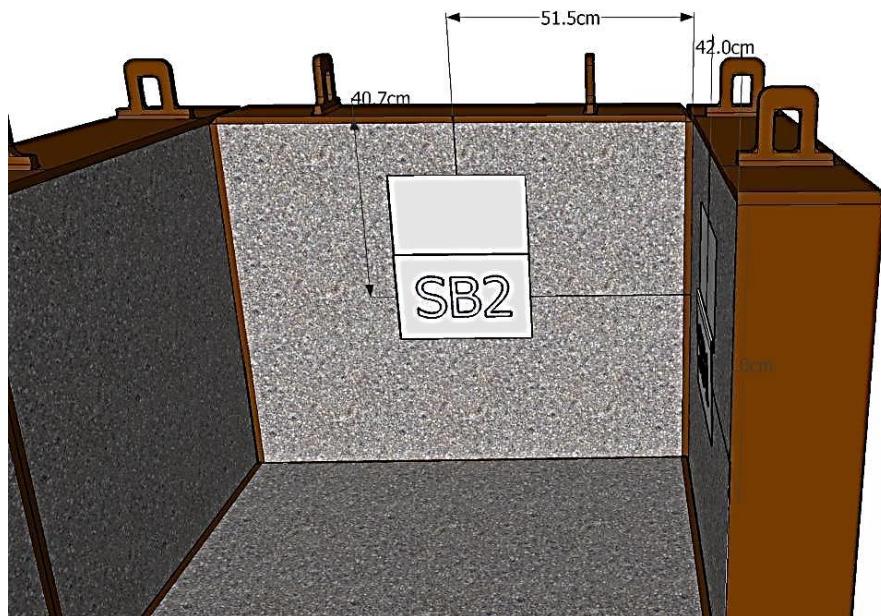


Fig. 1-66. Scattering box position 2 dimensions.

ALARM-TRAN-AIR-SHIELD-001

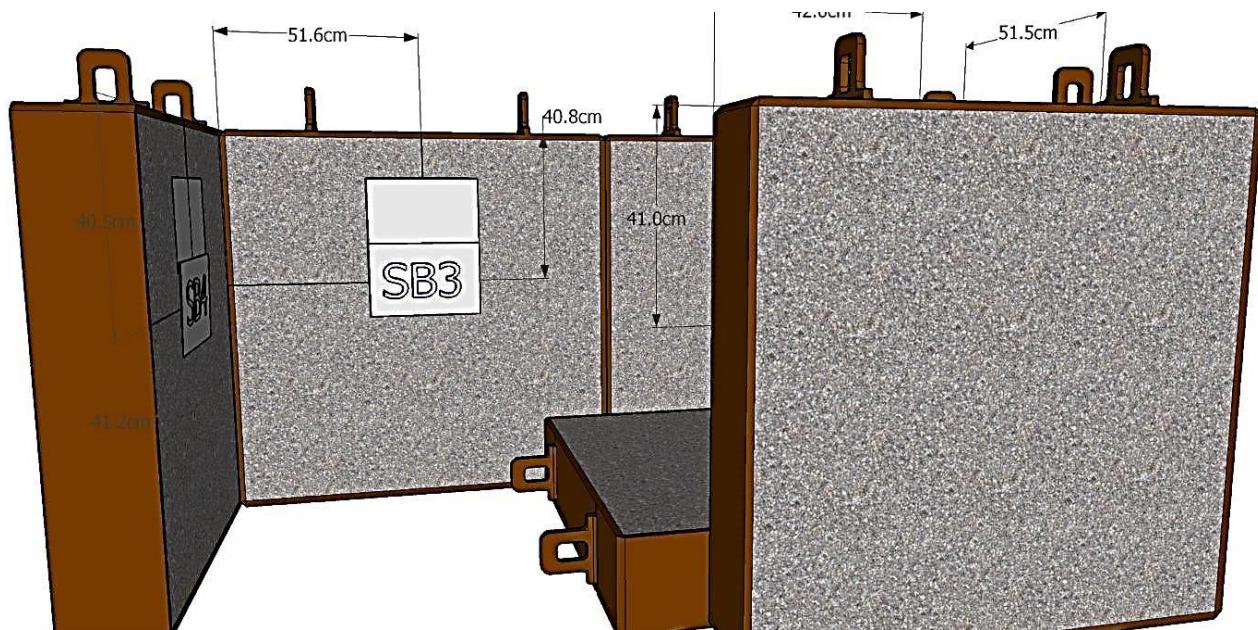


Fig. 1-67. Scattering box position 3 dimensions.

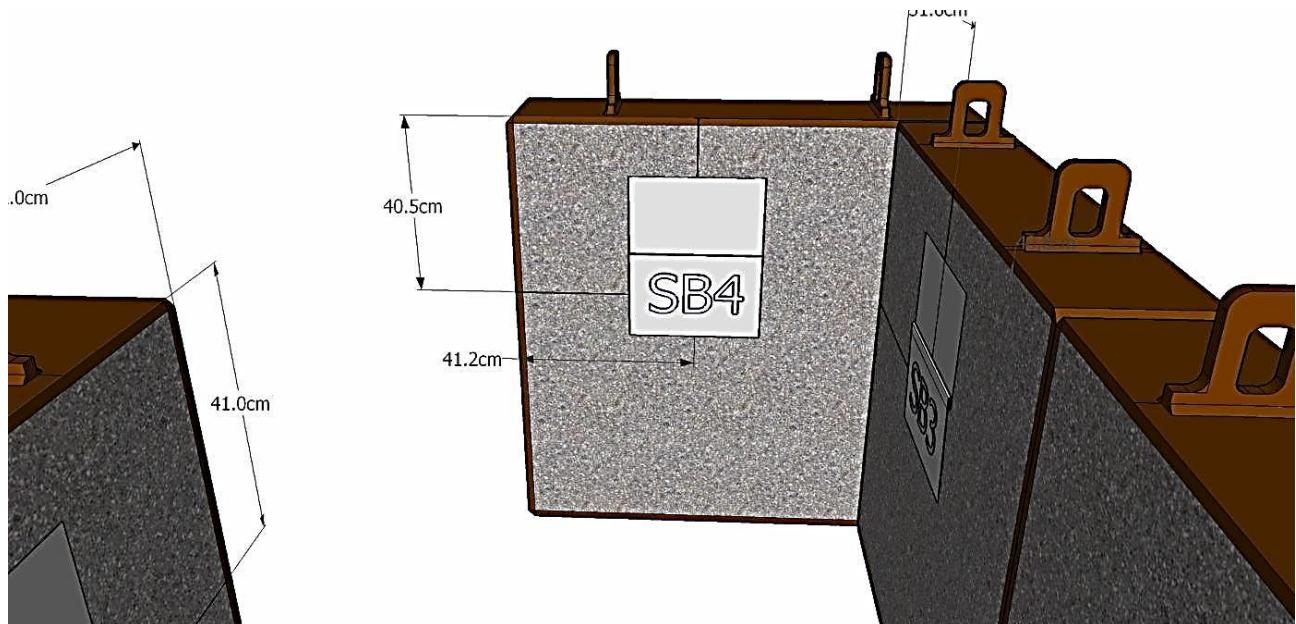


Fig. 1-68. Scattering box position 4 dimensions.

The configuration of neutron activation foils at scattering box position 1 (SB1) is identical to that within the foil holder, but a set of detector mounting plates is used to support the detectors instead of a foil holder. Figure 1-69 shows a photograph of the detectors at SB1, and Fig. 1-70 provides dimensions to locate these detectors on the mounting plate.

ALARM-TRAN-AIR-SHIELD-001

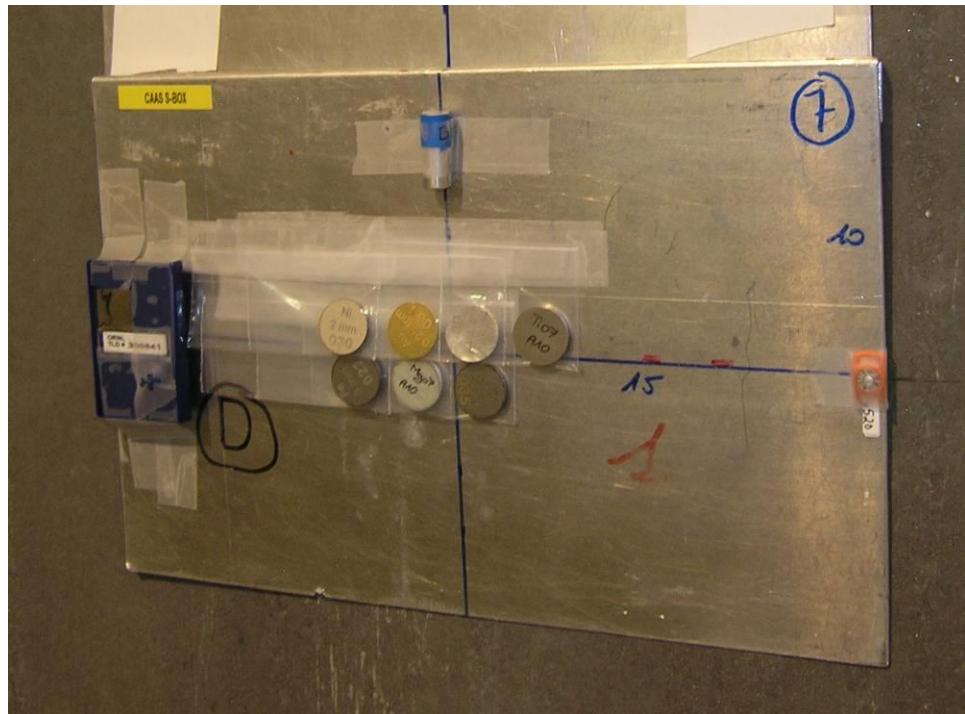


Fig. 1-69. Detectors at scattering box position 1.

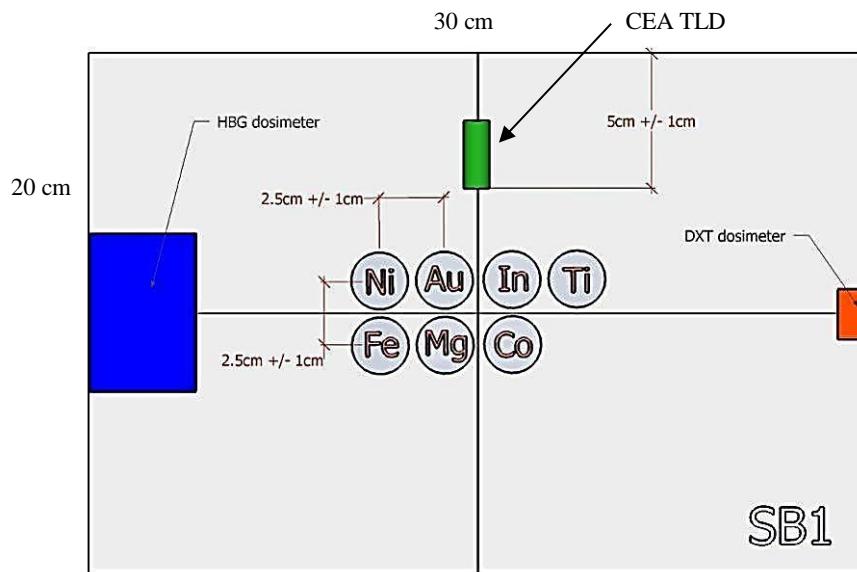


Fig. 1-70. Location of detectors on scattering box position 1 mounting plate.

The detector configuration at scattering box positions 2 through 4 are different from position 1 because a subset of the neutron activation foils is used. Only the nickel, gold, and cobalt activation foils are used in

ALARM-TRAN-AIR-SHIELD-001

positions 2, 3, and 4. Figure 1-71 shows a photograph of SB2, and Fig. 1-72 provides dimensions to locate these detectors on the mounting plate.

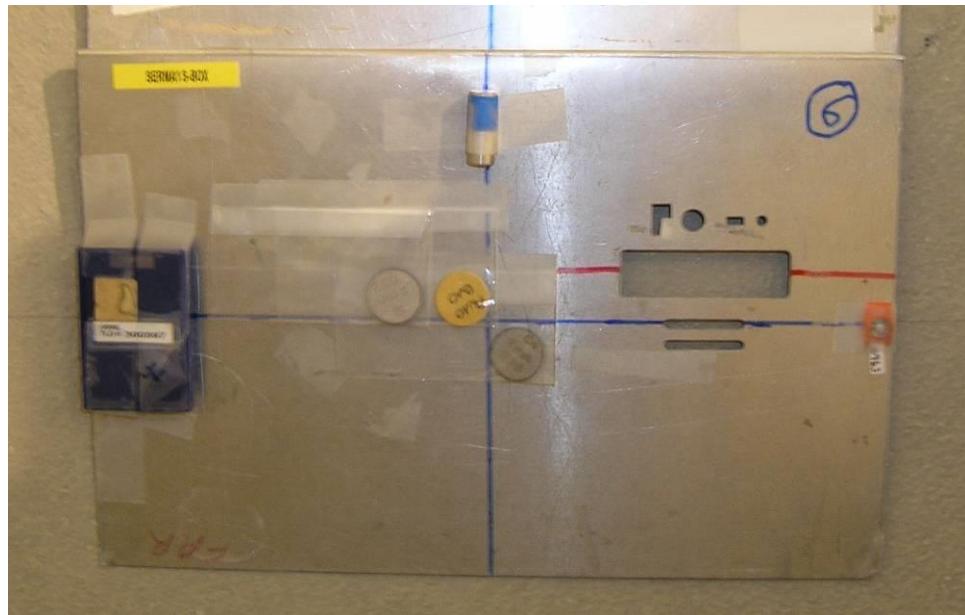


Fig. 1-71. Detectors at scattering box position 2.

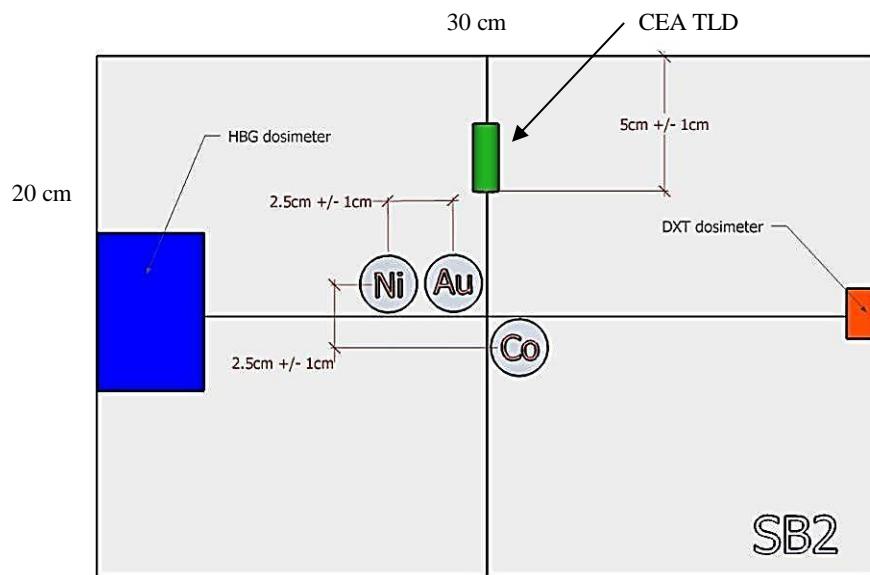


Fig. 1-72. Location of detectors on scattering box position 2 mounting plate.

The detector configuration at scattering box positions 3 and 4 are different from position 2 because only the Valduc Al₂O₃ TLD is used. Figure 1-73 shows a photograph that represents SB3 and SB4, and Fig. 1-74 provides dimensions to locate these detectors on the mounting plate.

ALARM-TRAN-AIR-SHIELD-001



Fig. 1-73. Detectors at scattering box positions 3 and 4.

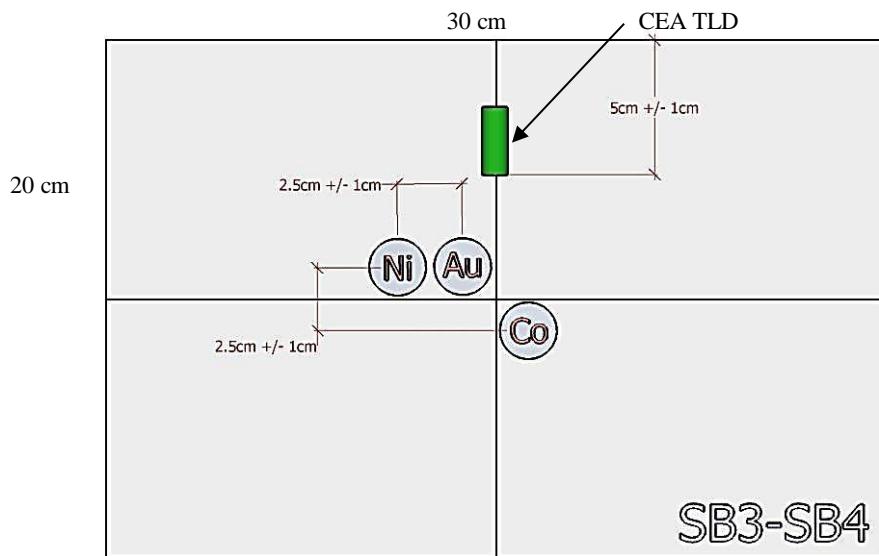


Fig. 1-74. Location of detectors on scattering box positions 3 and 4 mounting plate.

As can be seen in the photographs shown in Figs. 1-69, 1-71, and 1-73, the neutron activation foils have been attached to the aluminum mounting plates using plastic bags and tape. Discussions during the experiments concluded that a thin plastic bag would not likely perturb the neutron flux to which the foils are exposed. Based on this conclusion, no details about the plastic bags and tape were recorded. The actual application of this technique placed each foil in its own plastic bag, which results in several layers of plastic between the

ALARM-TRAN-AIR-SHIELD-001

neutron activation foils and SILENE. This is particularly true for the foils at scattering box position 1 (Fig. 1-69). The impact of these plastic bags will be further discussed in Sect. 2.0.

1.6 Measurement Techniques

After the experimental setup described in Sects. 1.1 through 1.5 was complete, an approach-to-critical was performed with the cadmium control rod fully extracted from the SILENE assembly, and the critical height was found to be 37.333 cm. For this experiment, the final solution height was 41.871 cm, which is 4.538 cm above the critical height with the control rod fully extracted. The critical pulse was initiated by the reactor operator fully removing the cadmium control rod at a rate of 2 m/sec. An external neutron source used during the initial steps of the approach-to-critical was removed before the experiment was conducted. From the Valduc logbook, this was SILENE operation S1-689, and there was 45.38 mm of excess reactivity. Units of mm are used for excess reactivity because the experimenters at Valduc, through years of experience with SILENE, knew approximately how much excess reactivity was added to SILENE per mm of solution. For the bare or unreflected geometry this value is 50 pcm/mm, which equates to approximately 2269 pcm of excess reactivity for this experiment (see Appendix H for more details).

The neutron activation measurement techniques in this experiment are well established techniques that have been used for many years.^a The neutron activation foils, as the name implies, become activated by the neutrons produced during the critical pulse of the SILENE assembly. About 3 hours after the critical pulse, the dosimetrist retrieved the neutron activation foils and TLDs from the SILENE room and began measuring the amount of activity in the foils and the dose absorbed by the TLDs. The activity measurements were performed over a few days following the excursion using a liquid nitrogen-cooled high purity germanium (HPGe) detector. The numbers of activated nuclei were all adjusted back to the same time shortly after the end of the pulse using the radioactive decay law:

$$N(t) = N_0 e^{-\lambda t}, \text{ where } \lambda = \frac{\ln(2)}{t_{1/2}} \text{ and } t_{1/2} \text{ is the activation product half-life.}$$

The amount of activity, A , was calculated using the expression:

$$A = -\frac{dN}{dt} = \lambda N.$$

The use of the expressions above relies on the assumption that all the activated nuclei were created instantaneously. In other words, all fission neutrons and activated nuclei are created at time $t=0$ seconds. While that is not completely true for this experiment (see Fig. 1-75), nearly all the fission events / neutrons / activated nuclei were created in such a short period of time compared to the half-life of the activation products that this assumption can be safely applied.

Below in Table 1-25 is a list of the neutron activation foils used in this experiment, the reaction products whose activity were measured, the half-lives of these reaction products, and some of the stronger gamma lines produced by these activation products.

^a N. Tsoulfanidis, Measurement and Detection of Radiation, Second Edition, Taylor & Francis, Washington, DC, Sections 14.4 and 15.5 (1995).

ALARM-TRAN-AIR-SHIELD-001

Table 1-25. Neutron activation foils and measured activation products^(a)

Foil	Reaction product	Half-life	Gamma lines (keV)	Relative intensity
Gold	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.6948 days	411.80	95.24%
Indium	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	4.486 hrs	336.20	45.80%
			416.86	27.70%
Iron	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	54.29 min	1097.30	56.20%
			1293.54	84.40%
Iron	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	312.12 days	834.80	99.97%
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn}$	2.5789 hrs	846.80	98.85%
	$^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$		1810.70	26.90%
Nickel	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	70.86 days	810.80	99.45%
Cobalt	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	1925.28 days	1173.20	99.85%
			1332.50	99.98%
Magnesium	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	14.997 hrs	1368.60	99.99%

(a) <http://www.nndc.bnl.gov/nudat2>

The entire process of determining the amount of dose absorbed by a TLD is not as straightforward as the activity in a foil. Collecting the TLDs and reading the absorbed dose is straightforward (i.e., the process of heating the TLD, measuring the intensity of visible photons, and converting that to absorbed dose). However, calibrating a TLD, creating a light or glow curve (correlation between light emitted and absorbed dose), and accounting for the many possible variations in TLD behavior (e.g., linearity versus supralinearity, fading, presence of neutrons, etc.) is more complex. Each individual TLD must be calibrated because two seemingly identical TLDs can be exposed to the same source and produce different responses. Furthermore, the responses of these TLDs exposed to the same source can change over time, requiring occasional recalibration.

The dose used in this benchmark is kerma in air, which has the same units as absorbed dose (not equivalent dose). Kerma (an acronym for *kinetic energy of radiation produced per unit mass in matter*) is usually easier to calculate than actual absorbed dose. This is the case because it is easy to determine the initial kinetic energy of all charged particles created by a neutral particle, but it is difficult to know the amount of energy deposited in a material before a charged particle exits that material. It is expensive to transport a charged particle and determine the exact amount of energy deposited. Therefore, a popular approximation to absorbed dose is kerma. However, kerma and the absorbed dose are equivalent when the material volume of interest has reached charged particle equilibrium. Charged particle equilibrium exists for a material volume if for every charged particle exiting the volume, there is one charged particle of the same type entering the volume with the same kinetic energy and traveling in the same direction. The simplest case in which charged particle equilibrium exists is when the material volume is large and no charged particles produced can exit the volume.

Section 1.5 illustrates that the TLDs were not made of air, and the energy absorbed in air was not actually measured. The air kerma measurements were possible because of the calibration^a that was performed with the TLDs. It is likely more accurate to infer that the air kerma was estimated based on a correlation between air kerma and light emitted by the TLD materials when heated, which is based on the calibration of *each individual* TLD. All the gamma dose measurements in this benchmark rely on these TLD calibrations. The Valduc Al_2O_3 TLD powder, which is contained in an aluminum equilibrator, was calibrated to air kerma due to a ^{60}Co source. The ORNL TLD measurement results are presented but are not used in the benchmark.

^a P. J. Lamperti and M. O'Brien, "NIST Measurement Services: Calibration of X-Ray and Gamma-Ray Measuring Instruments," NIST Special Publication 250-58, National Institute of Standards and Technology, April 2001.

ALARM-TRAN-AIR-SHIELD-001

Each ORNL TLD has a plastic equilibrator and was calibrated to air kerma due to a ^{137}Cs source. The purpose of the equilibrator is to ensure that the TLD material inside the equilibrator is in charged particle equilibrium. An important thing to note is that no corrections or adjustments have been made to the measured TLD dose data to account for the fact that the source in this experiment is a critical pulse (fission neutrons and photons) and not a ^{60}Co or ^{137}Cs source.

Once the TLDs were removed from the SILENE room, the aluminum card holding the TLD chips in the ORNL Harshaw Beta-Gamma dosimeter was removed from the case because the case contained an activated copper filter that would continue to contribute to the measured absorbed dose. After the absorbed dose of each TLD was read, the dose due to background was subtracted. This was more important for the ORNL TLDs because they were shipped via airplane from ORNL to Valduc for the experiments and shipped back to be read. Some fraction of the dose recorded by the TLDs is not directly related to the critical pulse. During the ~ 3 hours between the end of the pulse and retrieval of the detectors, the TLDs continued to measure absorbed dose due to the decay of activation products in the SILENE room.

1.7 Measurement Results

At 11:03:35 on October 11, 2010, the reactor operator began the critical pulse by withdrawing the cadmium control rod. Approximately 7 seconds later at 11:03:42, the reactor operator shut down the experiment by opening the valve to drain the uranyl nitrate solution from SILENE and returning the cadmium control rod to the fully inserted position. The dosimetrist reported the activity of the activation products listed in Table 1-25 at 11:06:04 on October 11, 2010. During the time between 11:03:42 and 11:06:04, some additional fission events did occur, primarily driven by delayed neutrons. This is evident in Fig. 1-75, which shows a plot of the fission rate versus time data recorded by the experimentalist.

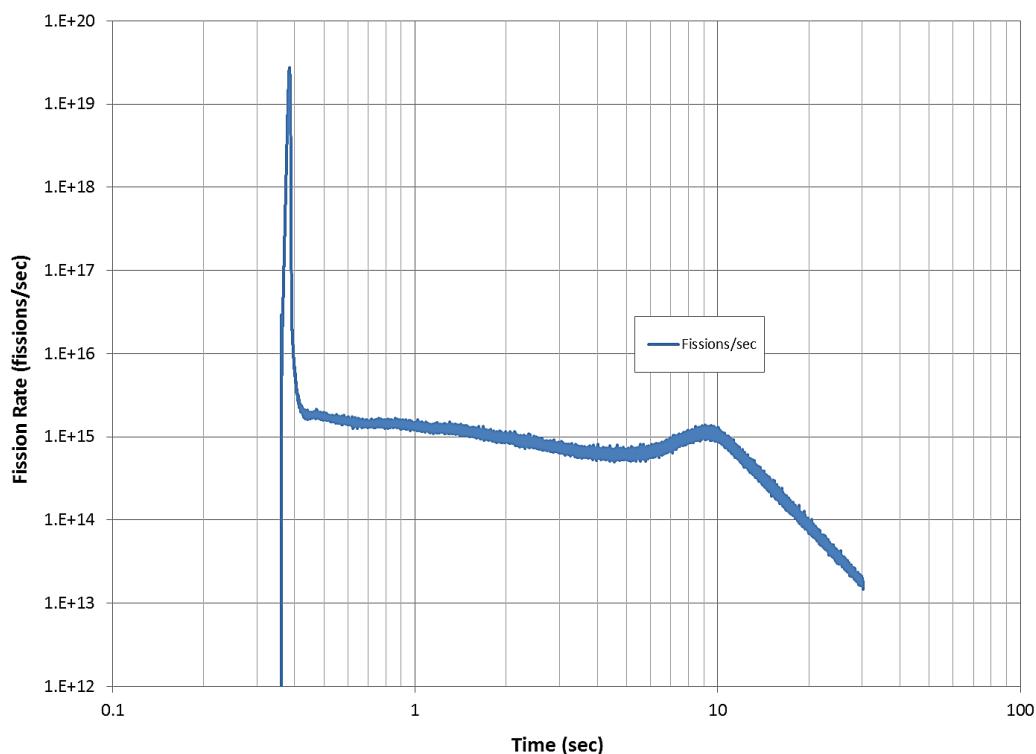


Fig. 1-75. Fission rate as a function of time.

ALARM-TRAN-AIR-SHIELD-001

Two measurements of the number of fission events during the critical pulse were reported. The first, 1.88×10^{17} fissions, was measured by one of the diagnostic detectors in the SILENE room and is considered by the experimenters to be the best estimate. The second, 1.73×10^{17} fissions, was measured by SNAC, which is a criticality accident dosimeter used at Valduc. Two thermocouples inside the SILENE assembly measure the solution temperature. Just before the critical excursion, the temperature recorded from these thermocouples was 20.0 and 20.6 degrees Celsius. The maximum temperatures during the critical excursion recorded by these thermocouples were 53.7 and 53.6 degrees Celsius.

Table 1-26 presents the results of the neutron activation foil measurements (adjusted to 11:06:04 on October 11, 2010), and Table 1-27 includes the results of the TLD dose measurements. The neutrons are not all born at the same time, but most of them are born during the pulse at about 0.4 seconds. A perfect model of this source would be time-, temperature-, density-, and position-dependent. Density and position are affected because of bubbles that form due to fission product gases (small contributor), radiolytic gases (larger contributor), and changes in liquid density due to changes in temperature. The doses reported in Table 1-27 include contributions from prompt fission photons, photons produced by neutron interactions, delayed photons from fission products, and delayed photons from activation products. The doses measured by the Valduc Al_2O_3 TLDs will be used for the benchmark and the ORNL TLDs (HBG and DXT) are additional data. This is because the Valduc staff members have more experience using these TLDs in the SILENE environment, and Al_2O_3 responds less to neutrons than LiF. Based on Fig. 1-75, some of the uranyl nitrate solution was in SILENE for at least 30 seconds after the excursion and could have been there longer. That time would allow short-lived fission products to decay and produce delayed fission product photons. The activation foils and TLDs were not removed from the SILENE room immediately following the excursion, which allowed any activated equipment to decay and contribute to the TLD dose.

ALARM-TRAN-AIR-SHIELD-001

Table 1-26. Neutron activation foils measurement results

Position	Reaction	Activity (Bq/g)	Absolute uncertainty ^(a) (2 σ)	Relative uncertainty ^(a) (2 σ)
Case 1 Collimator A	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	6.610×10^1	1.700×10^0	2.57%
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	1.812×10^5	5.700×10^3	3.15%
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	9.110×10^6	3.500×10^5	3.84%
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	8.030×10^3	2.500×10^2	3.11%
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	2.062×10^{-1}	8.200×10^{-3}	3.98%
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.310×10^3	6.100×10^{-1}	2.64%
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	6.110×10^1	2.300×10^0	3.76%
Case 2 Collimator B	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.436×10^1	4.400×10^{-1}	3.06%
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.242×10^1	5.900×10^{-1}	2.63%
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.426×10^4	7.500×10^2	3.09%
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	3.000×10^6	1.100×10^5	3.67%
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	1.196×10^3	4.000×10^1	3.34%
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	3.110×10^{-2}	1.200×10^{-3}	3.86%
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	7.790×10^2	2.200×10^1	2.82%
Case 3 Free field	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	1.000×10^1	7.400×10^{-1}	7.40%
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	2.120×10^0	7.000×10^{-2}	3.30%
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	6.620×10^1	1.600×10^0	2.42%
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	6.950×10^4	2.100×10^3	3.02%
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	8.780×10^6	4.300×10^5	4.90%
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	6.860×10^3	2.200×10^2	3.21%
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.961×10^{-1}	8.100×10^{-3}	4.13%
Case 4 Scattering box 1	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.403×10^3	6.700×10^1	2.79%
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	5.910×10^1	2.400×10^0	4.06%
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.299×10^1	4.100×10^{-1}	3.16%
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.227×10^1	5.300×10^{-1}	2.38%
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.414×10^4	7.300×10^2	3.02%
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	2.710×10^6	1.000×10^5	3.69%
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	5.250×10^2	1.700×10^1	3.24%
Case 5 Scattering box 2	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.058×10^{-2}	7.800×10^{-4}	7.37%
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	8.480×10^2	2.200×10^1	2.59%
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$ ^(b)	---	---	---
Case 6 Scattering box 3	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	7.060×10^{-1}	2.500×10^{-2}	3.54%
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.559×10^1	5.600×10^{-1}	2.19%
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.539×10^4	8.300×10^2	3.27%
Case 7 Scattering box 4	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	2.900×10^{-1}	1.200×10^{-2}	4.14%
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	4.404×10^1	9.900×10^{-1}	2.25%
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.460×10^4	1.400×10^3	3.14%
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.240×10^0	1.100×10^{-1}	3.40%

(a) Statistical uncertainty of the measurement.

(b) No statistically significant data could be measured for this reaction.

ALARM-TRAN-AIR-SHIELD-001

Table 1-27. TLD dose measurement results

Position	TLD type	Dose (Gy)	Absolute uncertainty ^(a) (2σ)	Relative uncertainty ^(a) (2σ)
Case 1 Collimator A	Al ₂ O ₃	6.610×10^0	2.908×10^{-1}	4.40%
	HBG	6.030×10^0	3.618×10^{-1}	6.00%
	DXT	7.070×10^0	4.242×10^{-1}	6.00%
Case 2 Collimator B	Al ₂ O ₃	8.200×10^{-1}	2.788×10^{-2}	3.40%
	HBG	8.740×10^{-1}	5.244×10^{-2}	6.00%
	DXT	7.730×10^{-1}	4.638×10^{-2}	6.00%
Case 3 Free field	Al ₂ O ₃	3.720×10^0	1.860×10^{-1}	5.00%
	HBG	5.020×10^0	3.012×10^{-1}	6.00%
	DXT	5.860×10^0	3.516×10^{-1}	6.00%
Case 4 Scattering box 1	Al ₂ O ₃	5.800×10^{-1}	2.320×10^{-2}	4.00%
	HBG	5.760×10^{-1}	3.456×10^{-2}	6.00%
	DXT	4.880×10^{-1}	2.928×10^{-2}	6.00%
Case 5 Scattering box 2	Al ₂ O ₃	4.400×10^{-1}	1.364×10^{-2}	3.10%
	HBG	3.980×10^{-1}	2.388×10^{-2}	6.00%
	DXT	3.980×10^{-1}	2.388×10^{-2}	6.00%
Case 6 Scattering box 3	Al ₂ O ₃	1.760×10^0	4.224×10^{-2}	2.40%
Case 7 Scattering box 4	Al ₂ O ₃	1.870×10^0	1.103×10^{-1}	5.90%

(a) Statistical uncertainty of the measurement.

ALARM-TRAN-AIR-SHIELD-001

2.0 EVALUATION OF EXPERIMENTAL DATA

This section reviews all the experimental data and evaluates the experimental uncertainties. The purpose is to identify any data that are not of benchmark quality due to (1) inconsistencies between the measured values and the expected measured values or (2) due to large experimental uncertainties. The experimental uncertainties will be calculated using MCNP6^a with continuous energy ENDF/B-VII.1^b cross section data unless explicitly stated otherwise. Two exceptions to this are the response functions used for both of the indium activation reactions, which use continuous energy cross sections from the IRDF-2002^c cross section library. The IRDF cross sections are used because the cross sections distributed with MCNP based on ENDF data are transport cross sections, which do not accurately reproduce the return to the ^{115}In ground state after the $^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$ reaction. As for the $^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$ reaction, the IRDF cross section produces a smaller bias between the experimentally measured values than the MCNP ENDF-based cross section.

2.1 Comparison and Initial Evaluation of the Experimentally Measured Data

The dosimetrists who measured the amount of activity in each foil and the dose absorbed in each TLD provided their opinions about the quality of the experimentally measured data. This is reflected in Tables 1-26 and 1-27. Any data the dosimetrists considered to be poor quality has been omitted from these tables or has a very large reported uncertainty. The manner in which this was reported in the tables varied between the dosimetrists in France and the US.

Before the full uncertainties of the measured data for this experiment are evaluated, all of the measured data from the full series of experiments are compared (comparing ALARM-TRAN-AIR-SHIELD-001 or experiment 1, [ALARM-TRAN-PB-SHIELD-001](#) or experiment 2, and [ALARM-TRAN-CH2-SHIELD-001](#) or experiment 3). These comparisons of each activation reaction and TLD are presented in Tables 2-1 through 2-11. The comparison analyzes ratios of similar measurements within a specific experiment, and based on these similarities, trends are found in the ratios. Similar trends are anticipated between all the experiments in this series. Since the ratios are for similar measurements within an experiment but not for identical measurements, the ratios will not be identical. Further differences are introduced by uncertainties in the measurement data. The same ratios between different experiments will not be identical because of measurement uncertainties and because of the different shielding material between SILENE and all the detectors in each experiment. The expected trends are summarized in the following bulleted list, which is followed by Tables 2-1 through 2-11 that list the ratios and absolute uncertainty of the ratios (2-sigma).

- The neutron activation foils in collimator A (A) and at the free field location (FF) are the same distance from SILENE. Because of scattering in collimator A, the ratio A/FF should be greater than 1, but measurement uncertainties may make the value close to 1.
- The foils in collimator A and the free field location are unshielded like the foils at scattering box positions 3 (SB3) and 4 (SB4). However, scattering box positions 3 and 4 foils are farther from SILENE than collimator A and the free field location. Therefore, the ratios A/SB3, A/SB4, FF/SB3, and FF/SB4 should be greater than 1.

^a MCNP6 Development Team, “MCNP6 User’s Manual, Version 1.0,” LA-CP-13-00634, Rev. 0, Los Alamos National Laboratory, May 2013.

^b M. B. Chadwick, et. al., “ENDF/B-VII.1: Nuclear Data for Science and Technology: Cross Sections, Covariances, Fission Product Yields and Decay Data,” *Nuclear Data Sheets*, vol. 112, pp. 2887–2996, 2011.

^c O. Bersillon, et. al., “International Reactor Dosimetry File—2002 (IRDF-2002),” STI/DOC/010/452, International Atomic Energy Agency, 2006.

ALARM-TRAN-AIR-SHIELD-001

- The foils in collimator B (B) are the same distance from SILENE as collimator A and the free field location. However, collimator B has additional shielding. Therefore, the ratios A/B and FF/B should be greater than 1.
- The foils in collimator B are closer to SILENE than those in scattering box position 1 (SB1). These foils are all shielded, but the shielding in front of collimator B is different for each experiment in the series. Additionally, the material shielding scattering box position 1 from SILENE is denser than any of the collimator B shielding material. However, the collimator B shield for experiment 3 contains a large weight percentage of boron. Therefore, it is difficult to identify the trend the B/SB1 ratio should follow. With all the different shielding materials, it seems reasonable that the trends for this ratio could vary dramatically.
- Scattering box positions 1 and 2 (SB2) are close to each other, so the SB1/SB2 ratio is expected to be near 1 or greater than 1.

Table 2-1. Comparison of $^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$ reaction data

Experiment	A/FF	A/SB3	A/SB4	FF/SB3	FF/SB4	A/B	FF/B	B/SB1	SB1/SB2
1	2.61 ± 0.1137	4.06 ± 0.1805	4.68 ± 0.2068	1.56 ± 0.0679	1.80 ± 0.0778	7.47 ± 0.3294	2.86 ± 0.1238	1.00 ± 0.0435	0.95 ± 0.0423
2	1.07 ± 0.0466	1.57 ± 0.0697	1.76 ± 0.0797	1.47 ± 0.0657	1.65 ± 0.0752	2.22 ± 0.0965	2.07 ± 0.0910	1.29 ± 0.0564	0.93 ± 0.0405
3	1.17 ± 0.0799	1.66 ± 0.1121	1.77 ± 0.1503	1.42 ± 0.0634	1.51 ± 0.1031	5.56 ± 0.3743	4.74 ± 0.2118	0.50 ± 0.0350	0.94 ± 0.0662

Table 2-2. Comparison of $^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$ reaction data

Experiment	A/FF	A/SB3	A/SB4	FF/SB3	FF/SB4	A/B	FF/B	B/SB1	SB1/SB2
1	1.00 ± 0.0352	1.50 ± 0.0513	1.66 ± 0.0558	1.50 ± 0.0496	1.66 ± 0.0539	2.95 ± 0.1085	2.95 ± 0.1055	1.01 ± 0.0357	0.87 ± 0.0281
2	0.97 ± 0.0600	1.33 ± 0.0794	1.48 ± 0.0903	1.37 ± 0.0837	1.52 ± 0.0951	1.89 ± 0.1147	1.94 ± 0.1208	1.32 ± 0.0828	0.87 ± 0.0539
3	0.91 ± 0.0566	1.16 ± 0.0719	1.31 ± 0.0652	1.28 ± 0.0791	1.44 ± 0.0717	6.89 ± 0.3411	7.58 ± 0.3752	0.30 ± 0.0150	0.86 ± 0.0430

Table 2-3. Comparison of $^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$ reaction data

Experiment	A/FF	A/SB3	A/SB4	FF/SB3	FF/SB4	A/B	FF/B	B/SB1	SB1/SB2
1	1.04 ± 0.0646	---	---	---	---	3.04 ± 0.1613	2.93 ± 0.1791	1.11 ± 0.0576	---
2	1.01 ± 0.0571	---	---	---	---	2.07 ± 0.1180	2.04 ± 0.1117	1.32 ± 0.0783	---
3	1.14 ± 0.0638	---	---	---	---	6.08 ± 0.3473	5.35 ± 0.3396	0.41 ± 0.0245	---

Table 2-4. Comparison of $^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} + ^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$ reaction data

Experiment	A/FF	A/SB3	A/SB4	FF/SB3	FF/SB4	A/B	FF/B	B/SB1	SB1/SB2
1	0.96 ± 0.0369	---	---	---	---	2.97 ± 0.1147	3.08 ± 0.1224	0.92 ± 0.0352	---
2	0.97 ± 0.0539	---	---	---	---	1.94 ± 0.1113	2.00 ± 0.0771	1.18 ± 0.0450	---
3	0.88 ± 0.0562	---	---	---	---	4.52 ± 0.2144	5.14 ± 0.3430	0.53 ± 0.0260	---

ALARM-TRAN-AIR-SHIELD-001

Table 2-5. Comparison of $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ reaction data

Experiment	A/FF	A/SB3	A/SB4	FF/SB3	FF/SB4	A/B	FF/B	B/SB1	SB1/SB2
1	1.11 ± 0.0486	4.43 ± 0.2027	4.31 ± 0.1943	4.01 ± 0.1859	3.90 ± 0.1782	6.77 ± 0.3051	6.13 ± 0.2799	3.00 ± 0.1454	2.43 ± 0.1326
2	1.08 ± 0.0487	3.92 ± 0.2766	3.75 ± 0.2736	3.62 ± 0.2548	3.46 ± 0.2521	5.40 ± 0.2455	4.99 ± 0.2251	3.93 ± 0.2030	1.70 ± 0.0882
3	1.20 ± 0.0542	---	---	---	---	---	---	---	---

Table 2-6. Comparison of $^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$ reaction data

Experiment	A/FF	A/SB3	A/SB4	FF/SB3	FF/SB4	A/B	FF/B	B/SB1	SB1/SB2
1	1.17 ± 0.0523	---	---	---	---	6.71 ± 0.3068	5.74 ± 0.2658	2.28 ± 0.1060	---
2	1.17 ± 0.0571	---	---	---	---	6.49 ± 0.3393	5.54 ± 0.2903	2.91 ± 0.1515	---
3	1.18 ± 0.0818	---	---	---	---	2.42 ± 0.1074	2.05 ± 0.1421	6.99 ± 0.3425	---

Table 2-7. Comparison of $^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$ reaction data

Experiment	A/FF	A/SB3	A/SB4	FF/SB3	FF/SB4	A/B	FF/B	B/SB1	SB1/SB2
1	1.05 ± 0.0603	---	---	---	---	6.63 ± 0.3674	6.31 ± 0.3564	2.94 ± 0.2446	---
2	---	---	---	---	---	---	---	---	---
3	---	---	---	---	---	---	---	---	---

Table 2-8. Comparison of $^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$ reaction data

Experiment	A/FF	A/SB3	A/SB4	FF/SB3	FF/SB4	A/B	FF/B	B/SB1	SB1/SB2
1	1.03 ± 0.0572	---	---	---	---	6.11 ± 0.5073	5.91 ± 0.4989	---	---
2	0.94 ± 0.0775	---	---	---	---	4.49 ± 0.5362	4.78 ± 0.6380	4.58 ± 0.5895	---
3	1.10 ± 0.1310	---	---	---	---	2.11 ± 0.2246	1.91 ± 0.1964	---	---

Table 2-9. Comparison of Al_2O_3 doses

Experiment	A/FF	A/SB3	A/SB4	FF/SB3	FF/SB4	A/B	FF/B	B/SB1	SB1/SB2
1	1.78 ± 0.1183	3.76 ± 0.1882	3.53 ± 0.2602	2.11 ± 0.1172	1.99 ± 0.1538	8.06 ± 0.4482	4.54 ± 0.2743	1.41 ± 0.0742	1.32 ± 0.0667
2	1.46 ± 0.1024	1.95 ± 0.1675	1.05 ± 0.0687	1.34 ± 0.1179	0.72 ± 0.0493	1.49 ± 0.0769	1.02 ± 0.0565	---	---
3	1.10 ± 0.1602	5.24 ± 0.6661	4.64 ± 0.3776	4.74 ± 0.8629	4.20 ± 0.6448	1.68 ± 0.1868	1.52 ± 0.2603	---	---

Table 2-10. Comparison of HBG doses

Experiment	A/FF	A/SB3	A/SB4	FF/SB3	FF/SB4	A/B	FF/B	B/SB1	SB1/SB2
1	1.20 ± 0.1019	---	---	---	---	6.90 ± 0.5854	5.74 ± 0.4874	1.52 ± 0.1288	1.45 ± 0.1228
2	1.39 ± 0.1183	---	---	---	---	1.71 ± 0.1451	1.23 ± 0.1040	1.54 ± 0.1309	1.15 ± 0.0975
3	1.11 ± 0.0945	---	---	---	---	1.70 ± 0.1440	1.52 ± 0.1293	15.69 ± 1.3316	1.76 ± 0.1490

ALARM-TRAN-AIR-SHIELD-001

Table 2-11. Comparison of DXT doses

Experiment	A/FF	A/SB3	A/SB4	FF/SB3	FF/SB4	A/B	FF/B	B/SB1	SB1/SB2
1	1.21 ± 0.1024	---	---	---	---	9.15 ± 0.7761	7.58 ± 0.6433	1.58 ± 0.1344	1.23 ± 0.1040
2	1.73 ± 0.1469	---	---	---	---	1.78 ± 0.1510	1.03 ± 0.0872	1.54 ± 0.1311	1.26 ± 0.1071
3	1.27 ± 0.1080	---	---	---	---	2.02 ± 0.1714	1.59 ± 0.1346	19.18 ± 1.6279	1.23 ± 0.1048

2.1.1 Analysis of the Experiment 1 Measured Data – The trends expected of the ratios in Tables 2-1 through 2-11 have not all been observed for the measured data of this benchmark (experiment 1). The most obvious outlier is the gold foil activation in collimator A, which can most easily be identified by looking at the A/FF ratio for experiment 1 in Table 2-1. It appears that the measured gold activation in collimator A for this experimental is high by a factor of about 2.5. Furthermore, the A/FF ratio for the gold foil activity calculated by MCNP6, SCALE 6.2,^a COG 11.1,^b and TRIPOLI-4^c were all about 1.0. Based on this, it was concluded that the gold foil measurement in collimator A of this experiment is not acceptable as a benchmark value. All the remaining experiment 1 neutron activation measurements seem reasonable and will not be excluded from the benchmark based on the analysis presented in Tables 2-1 through 2-11.

Analyses of the TLD photon doses are not as straightforward as the analyses of the neutron activation foils. The measurement results in Table 1-27 suggest that the Al₂O₃ free field dose is too low. This is based on comparison of all the TLD doses measured at the free field location, as well as the variances in measured doses at all the other locations where multiple TLDs measurements were completed. Furthermore, the A/FF, A/SB3, A/SB4, FF/SB3, and FF/SB4 ratios in Table 2-9 do not show the expected trends; the A/FF ratio is much greater than 1, and the A/SB3, A/SB4, FF/SB3, and FF/SB4 ratios are not similar. These results are similar to those obtained in the collimator A gold foil activation in experiment 1. However, when the ratios for the other TLDs in all the experiments are considered, similar variations are observed. Therefore, this TLD dose measurement has not been rejected based on the data in Table 1-27 and Tables 2-1 through 2-11.

2.1.2 Analysis of the Experiment 1 Measured Data Uncertainties – Table 1-26 lists the only uncertainties presented by the dosimetrists for the foil activation measurements, and no discussion of the uncertainties is provided. The evaluators believe the dosimetrists intended for these uncertainties to represent the total measurement uncertainty, but the evaluators also believe these uncertainties only represent the statistical uncertainties associated with the measurement of the activity produced in the neutron activation foils. If this is the case, it is possible that these uncertainties under predict the uncertainty associated with the activity measurements by excluding other possible uncertainties such as foil mass uncertainty and half-life uncertainty. After consideration of these uncertainties provided by the dosimetrists, the evaluators do not think that the reported uncertainties associated with the activity measurements significantly under predicted the uncertainty of the activity measurements. Therefore, the uncertainties reported in Table 1-26 will be treated as the uncertainties associated with the activity measurements.

Similarly, the uncertainties reported in Table 1-27 are the only uncertainties presented by the dosimetrists for the measurement of absorbed dose by the TLDs, and no discussion of the uncertainties is provided. Again,

^a SCALE Development Team, *SCALE: A Comprehensive Modeling and Simulation Suite for Nuclear Safety Analysis and Design*, ORNL/TM-2005/39, Version 6.2, Oak Ridge National Laboratory, April 2016.

^b R. M. Buck and E. M. Lent, *COGII Manual Supplement*, LLNL-SM-461824, Lawrence Livermore National Laboratory, November 8, 2010.

^c TRIPOLI-4® Project Team, *TRIPOLI-4® Version 4 User Guide*, CEA-R-6169, Commissariat à l’Énergie Atomique et aux Énergies Alternatives, Saclay, 2008.

ALARM-TRAN-AIR-SHIELD-001

the evaluators think the dosimetrists intended for these uncertainties to represent the measurement uncertainty, but the evaluators also think that these uncertainties only represent the statistical uncertainties associated with the TLD measurements. This is based on analysis performed to estimate the typical measurement uncertainty associated with the ORNL HBG dosimeters,^a previous measurements with the Al₂O₃ dosimeter at the SILENE facility^b and standard ISO/ASTM 51956 for TLD systems.^c The ASTM standard states that the measurement uncertainty should be in the range of 6 to 13 percent (2-sigma) if best practices are followed by the dosimetry program. The evaluation of the Al₂O₃ and HBG dosimeters both estimated the measurement uncertainty to be about 10 percent (2-sigma) for doses on the order of magnitude delivered in this experiment. In addition to statistical uncertainties, these other studies evaluated the uncertainty related to the source spectra being different from the TLD calibration spectrum, uncertainty in the calibration source, and measurement repeatability. Therefore, the evaluators have decided to use a measurement relative uncertainty of 10 percent (2-sigma) for the TLD dose measurements reported in Table 1-27 instead of the values that appear in that table.

2.2 Missing and Contradictory Data and Resolution of These Data

There are a few pieces of missing and contradictory data, some of which can have a statistically significant impact on this benchmark. *Statistically significant* means that statistically different results can be simulated with Monte Carlo uncertainties less than 1 percent when using different values for the contradictory data or different assumptions for the missing data. The following subsections discuss these data and provide a clear explanation of how these issues have been resolved.

2.2.1 SILENE Room – No measurement of the temperature, pressure, or humidity was made within the SILENE room during the experiments. Climate control equipment was operating during the entire experiment, so standard room temperature is a reasonable approximation, 20 °C. According to ANSI/ASHRAE 55-1992,^d typical humidity within a climate control area should range from 30 to 60 percent relative humidity depending on the season and whether the climate control equipment is heating or cooling. The assumed relative humidity during this experiment was 50%. The composition of air at 20 °C, 500 m elevation (approximate elevation of Valduc and SILENE), and 50% relative humidity is given in Table 2-12. Note that the density of dry air at sea level is approximately 1.205×10^{-3} g/cm³.

Table 2-12. SILENE room air composition

Element	Weight percent
H	0.085570
C	0.012305
N	74.949239
O	23.679995
Ar	1.272891
Density	1.129858×10^{-3} g/cm ³

^a Stanford Dosimetry, *Uncertainty Analysis of the Oak Ridge National Laboratory Harshaw Whole Body Dosimeter*, Stanford Dosimetry, LLC (2009).

^b E. Gaillard-Lecanu, et. al., “Franco-Russian comparison of mixed neutron and gamma radiation field dosimeters at the Silene reactor,” *Radiation Measurements*, **33**, p. 859 (2001).

^c ISO/ASTM, *Standard Practice for Use of Thermoluminescence-Dosimetry System (TLD System) for Radiation Processing*, ISO/ASTM 51956:2013(E) (2013).

^d ANSI/ASHRAE, *Thermal Environmental Conditions for Human Occupancy*, Standard 55-1992 (1992).

ALARM-TRAN-AIR-SHIELD-001

2.2.2 Collimator Boxes – No chemical analysis is available for the lead and copper layers within the collimator boxes, so these materials are assumed to consist of natural compositions and theoretical densities 11.344 g/cm³ and 8.92 g/cm³, respectively.

2.2.3 Free Field Location – No information is available about the exact compositions of the free field location stand. The aluminum portion of the stand is assumed to be natural aluminum (density 2.702 g/cm³), the steel base is assumed to be S235JR (Table 1-2), and the concrete in the base is assumed to be SILENE concrete (Table 1-1).

2.2.4 Scattering Box Detector Mounting Plate – No chemical analysis has been performed on the detector mounting plates within the scattering box. These plates are assumed to be natural aluminum with a density of 2.702 g/cm³.

2.2.5 SILENE Diagnostics – The exact composition of the polyethylene moderator surrounding each SILENE diagnostic detector is unknown, so it is assumed that the density is 0.955 g/cm³. These cylindrical moderators sit atop a small steel pedestal and steel table. The composition of the small pedestal is unknown and is assumed to be S235JR (Table 1-2).

2.2.6 Neutron Activation Foil – No chemical analysis was performed for any of the titanium foils. Therefore, the titanium foils are assumed to be natural composition without impurities and theoretical density (4.5 g/cm³).

2.2.7 Concrete Data – The largest source of missing and contradictory data is that of material compositions. Ideally, a chemical analysis would exist for each material in the experiment. However, as evident in Sect. 1.0, most materials are described using the standard definition of that material. Ironically, the concrete shield blocks all have a chemical analysis report, but these represent the largest source of missing and contradictory information. The barite (Table 1-5), magnetite (Table 1-7), and standard (Table 1-8) concrete compositions all report the boron weight percent as <0.1 and the chlorine weight percent as <0.01. Also missing from the barite concrete composition is the weight percent of barium and sulfur, and missing from all three of these concrete compositions is the weight percent of oxygen.

The concrete shielding material known as colemanite concrete was not used in this experiment. However, some colemanite concrete was acquired at the same time as the barite, magnetite, and standard concrete. Colemanite is an ore that naturally contains boron. The chemical analyses of these four concretes were performed at the same time by LERM, and it is believed that the analyses were performed for a standard set of elements. If an element was not detected in the analysis, it was reported as less than the detectable limit. LERM expected to detect boron in the colemanite concrete, so boron was included in the set of elements being analyzed. Not knowing how much boron and chlorine are present in these concretes is problematic because they are both strong thermal neutron absorbers. To illustrate the impact that boron can have, the C/E ratios of the thermal reactions in collimator B and at scattering box location 1 vary by as much as a factor of 2.0 when comparing concrete shields with 0.0 and 0.1 weight percent boron. This variation elucidated the need to better quantify the amount of boron and chlorine present in each type of concrete. Consultation with concrete experts at CEA Saclay and ORNL^a led to the initial belief that boron is not typically in concrete unless it has been explicitly included as an aggregate material, like in colemanite or priceite concrete, which is usually done for the purposes of shielding neutrons. Further consultation with PNNL-15870 Rev. 1,^b which

^a Yann Le Pape, Personal communication / email, February 15, 2015.

^b R. J. McConn, et. al., “Compendium of Material Composition Data for Radiation Transport Modeling,” PNNL-15870 Rev. 1, Pacific Northwest National Laboratory, 2011.

ALARM-TRAN-AIR-SHIELD-001

provides 26 example concrete compositions, showed that boron is not present in concrete unless it is explicitly added via the aggregate. Therefore, the evaluators have decided to treat the <0.1 weight percent boron in the barite, magnetite, and standard concrete as 0.0 weight percent. The same conclusion could not be drawn concerning chlorine because a few of the example compositions reviewed did contain chlorine. Therefore, the chlorine composition of <0.01 weight percent will be treated as 0.005 ± 0.005 weight percent, which follows the guidance of the ICSBEP Guide to the Expression of Uncertainties.^a It seems likely that the presence of chlorine could depend on the amount of chlorine present in the water added to the concrete mix.

It appears that LERM was not aware that barite concrete should contain barium and sulfur, even though barite is BaSO_4 , because barium and sulfur were not included in the set of elements included in the LERM analysis. The analysis report of this concrete indicates that an insoluble residue remained that likely consisted of barium sulfate (BaSO_4), and in parentheses is the note: “about 54%.” Based on this comment, it is not clear whether the entire barite concrete sample is 54 weight percent barium sulfate, the remaining residue is 54 weight percent barium sulfate, or the percentage sign is even referring to weight percentage. The evaluators have decided to assume that this note means that the entire barite concrete sample is 54 weight percent barium sulfate, which means the barite concrete contains 31.7737 weight percent Ba and 7.4190 weight percent S. The assumption is based two factors. First, all other data reported in the analysis were based on weight percent, so it was assumed that this note was referring to weight percent. Second, if this observation means that the residue is 54 weight percent barium sulfate, then additional information is needed about the remaining portion of the residue, and specifics are needed on how to relate the weight percentages of the residue to the bulk sample. Finally, preliminary computational results using this assumption compared reasonably well with experimentally measured values in collimator B, which indicates that this is either a good assumption or the experimentally measured values in collimator B are not very sensitive to the barium sulfate composition in the collimator B shield.

The oxygen weight percentage is missing from these concrete compositions, as well. Since oxygen is present in all concrete compositions, it was assumed that the oxygen weight percentage would make up the balance of the compositions. In other words, the oxygen weight percent is equal to 100 minus the sum of the other reported (and assumed in the case of Ba and S in barite concrete) weight percentages. Therefore, the oxygen weight percent in the barite, magnetite, and standard concrete is 43.0023, 33.435, and 48.965, respectively.

The final inconsistency concerning the concrete compositions concerns their density. The densities reported in Sect. 1.0 are based on the analysis performed by Soutrenon (standard 2.3 g/cm³, barite 3.25 g/cm³, magnetite 3.9 g/cm³). This analysis was performed on samples of concrete, presumably from the same batch used to create the shielding blocks used in this experiment, and not the actual shielding blocks themselves. Shortly after the experiment, the masses of the concrete shield blocks were measured for the purpose of updating the concrete densities due to a few years of potential water loss (drying) since the Soutrenon analysis. The reported results, including the steel frame, were 535 kg, 806 kg, and 845.5 kg for the standard, barite, and magnetite concretes, respectively, and the measurement uncertainty was ± 1 kg. For the standard and magnetite concrete, this is the measurement of a single block, not the average of all blocks used. The mass of the steel frame in the benchmark model is approximately 97.908 kg, and the volume of the concrete portion of these blocks in the benchmark model is 2e5 cm³. Subtracting the steel frame benchmark mass from the measured concrete block masses and dividing by the benchmark concrete block volume produces estimates of the concrete density: 2.19 g/cm³, 3.54 g/cm³, and 3.74 g/cm³ for the standard, barite, and magnetite concretes, respectively. The trend for the standard and magnetite concrete was expected, as the

^a V. F. Dean, Ed., “ICSBEP Guide to the Expression of Uncertainties,” NEA/NSC/DOC(95)03, Organization for Economic Co-operation and Development—Nuclear Energy Agency, 2009.

ALARM-TRAN-AIR-SHIELD-001

mass and density had decreased over time. However, the barite concrete mass and density increased based on these measurements. As concrete dries, it loses water, but it also absorbs carbon dioxide from the atmosphere. The evaluators did not consider it realistic for the mass and density to increase over time, even with the potential addition of mass due to carbon dioxide. Assuming that the mass measurement was performed on the correct shield block and there was no significant error, the most logical explanation of why the barite concrete shield is denser than the sample analyzed is that there is more aggregate (barite) in the shielding block than the sample. If that is the case, then the barite concrete in the shielding block and sample may not have come from the same batch, and quality assurance to guarantee consistent production of the concrete was lacking. In the end, the evaluators decided to use the concrete densities provided by Soutrenon for the benchmark values.

2.2.8 Plastic Bags in the Scattering Box – The foils mounted in the scattering box were placed inside thin plastic bags, which were taped to the aluminum mounting plates that were taped to the scattering box concrete shield blocks. These bags can be seen in Figs. 1-69, 1-71, and 1-73. The experimentalists assumed that this thin plastic bag would have no impact on the measured data. Therefore, no data were collected concerning the plastic bags (i.e., thickness and composition). This assumption appears to be true for *one* plastic bag. However, each foil in the scattering box was mounted using its own individual plastic bag, so for position 1 within the scattering box, seven plastic bags were used. Use of multiple plastic bags layered on top of each other to mount the foils resulted in varying amounts of plastic surrounding each foil. The cobalt foil at position 1 of the scattering box (bottom right of Fig. 1-69) has one layer of plastic between it and the aluminum mounting plate. Here one layer of plastic means half or one wall of a plastic bag, so two layers is the entire thickness of a plastic bag. Alternatively, the nickel foil (top left of Fig. 1-69) has 13 layers of plastic between it and the aluminum mounting plate. Furthermore, the top portion of the plastic bags have been folded up and taped to the aluminum mounting plate just above the neutron activation foils (Fig. 1-69). The evaluators set out to determine whether this additional plastic would impact the measurements in this experiment, even though the composition and wall thickness of the bags were unknown. Research into commonly used plastic bags of this size in the US revealed that these bags are usually made of polyethylene (theoretical density of 0.92 g/cm³). It was also found that the wall thickness of these bags is typically between 0.00127 and 0.01016 cm (0.5 and 4 mils), so the total thickness is between 0.00254 and 0.02032 cm. To investigate the possible impact of these plastic bags, the neutron activation foils in the scattering box were placed inside a polyethylene box whose dimensions varied between position 1 and the other positions. The thickness of the polyethylene facing inside the scattering box for all positions was 0.00508 cm (2 mils). The thickness of the polyethylene on the other five sides of this box of plastic was 0.06604 cm (26 mils) for position 1 and 0.0254 cm (10 mils) for the other positions. The addition of this polyethylene caused changes in the calculated neutron activation between 0.5 and 2.0 percent for the position 1 foils and between 0.04 and 2.0 percent for the foils in the other positions. The evaluators have determined that there is not enough information available to model these plastic bags exactly and to make an exact estimate of their effect. Therefore, instead of performing a detailed and simplified analysis of these plastic bags and adjusting the benchmark values to account for this simplification (bias), the evaluators have decided to include an uncertainty of 2.0 percent (1-sigma) to account for the plastic bags. This additional uncertainty is based on the analysis presented above that used a best-estimate plastic bag wall thickness of 0.00508 cm (2 mils). The additional 2.0 percent experimental uncertainty is equal to the largest change between the activation with and without the plastic bags, whose Monte Carlo simulations had a 1-sigma uncertainty less than 1 percent.

2.3 Uncertainty of the SILENE Fission Source

One of the uncertainties in this experiment that has the largest impact is the uncertainty of the number of fission events that occurred. All of the simulations of the benchmark model use the number of fission events as a normalization factor. Therefore, the uncertainties of the simulation results of the benchmark model are

ALARM-TRAN-AIR-SHIELD-001

directly proportional to the uncertainty of the number of fission events. Unfortunately, the measurement of the number of fission events was not accompanied by an exact uncertainty. However, Valduc has provided information about other methods used to measure the number of fission events in SILENE in the past, and these measurements include uncertainties that will be used as an educated guess of the uncertainty for this experiment. Past measurements of the number of fissions via radiochemical analysis have produced uncertainties of 0.08 and 1.6 percent (1-sigma) for a lead reflected and unreflected geometry, respectively.^a For the same experiments, the number of fissions was estimated by thermal balance (temperature change in the fuel solution), and the uncertainty was 5.9 percent (1-sigma) for both the lead reflected and unreflected cases. The detector diagnostics (Fig. 1-51) used to measure the number of fissions for this experiment were also used in these past experiments with and without the lead reflector. However, as in this experiment, the uncertainty for the number of fissions measured by the detector diagnostics in these past experiments was not reported. In these past experiments, the bias between the number of fissions measured by radiochemistry and the detector diagnostics is 2.8 and 3.9 percent for the lead reflected and unreflected geometries, respectively. The small bias between the radiochemistry estimate and detector diagnostics estimate gives confidence in the detector diagnostic results, but it does not define the uncertainty. The experimenters recommend an uncertainty in the range of 4 or 5 percent (1-sigma). The best estimate of the uncertainty for the number of fissions is equal to 6 percent (1-sigma). This uncertainty is more than twice the uncertainty associated with the radiochemical measurement from these previous experiments. This is roughly equal to the uncertainty for the thermal balance measurement from the previous experiments, and it is larger than the reported bias for these previous experiments. Furthermore, 12 percent (2-sigma) is larger than the difference between the two measurements of the number of fissions discussed in Sect. 1.7.

2.3.1 Propagation of Fixed Source Uncertainties – Some of the simulation results presented in Section 4.0 are based on a two-step method to simulate this experiment. Step one is an eigenvalue simulation that tallies the spatial distribution and energy distribution of fission neutrons. Step two converts the tally from step one to a source, which is then used in a fixed-source simulation to calculate the detector responses. More details are given in Sect. 4.0, and this brief introduction provides some background on how uncertainties due to the fixed source were minimized. No uncertainty contributions are being added to the simulations of the benchmark in this evaluation due to the fixed source because all the examples in Sect. 4.0 made efforts to minimize the tally uncertainties in step one of the two-step method that would propagate to step two. If a fixed source were created that is different from the examples discussed in this section and Sect. 4.0, then the results of the discussion in this section may not apply.

The fixed source, described in Sect. 4.1 and used with the MCNP simulations, was originally calculated using the SCALE 200 neutron group energy structure and a spatial mesh in cylindrical coordinates with cells of equal volume, approximately 16 cm^3 . These cylindrical cells have only 1 azimuthal bin, so the source is assumed to be azimuthally symmetric. The discretization was refined to reduce the magnitude of errors propagating from the tally of the eigenvalue simulation to the source of the fixed-source simulation. The fixed source described in Sect. 4.0 uses 1,006 neutron groups, each of the SCALE 200 neutron energy group structure split into 5 subgroups, one group from 0 MeV to the minimum energy of the 200 group structure, and five 2 MeV wide groups from 20 to 30 MeV. The volume of the cells in the cylindrical mesh was reduced to approximately 8 cm^3 by including additional intervals in the radial direction.

Great efforts were also made to ensure the tally data from the eigenvalue simulation were well converged to reduce the Monte Carlo uncertainties that might propagate from the eigenvalue simulation to the fixed-source simulation. The tally of the fission neutron energy distribution had large uncertainties, greater than 5 percent,

^a K. Hamon, “Etalonnage du réacteur SILENE,” Commissariat à l’Énergie Atomique - Centre d’études de Valduc, Département de recherche en Neutronique et Criticité, CEA Valduc, 2004.

ALARM-TRAN-AIR-SHIELD-001

at low energies (< 50 eV) and high energies (> 20 MeV). However, not many fission neutrons are born below or above these energies, so it is not likely that these errors will cause problems for the fixed-source simulations. Between 50 eV and 20 MeV, the errors become very small, 0.01 percent at 1 MeV. All tally bins of the fission neutron energy distribution with uncertainties greater than 20 percent were ignored and assigned a value of zero in the fission neutron energy distribution for the fixed source presented in Sect. 4.0. The largest uncertainty in the mesh tally used to create the fission neutron spatial distribution is slightly less than 0.25 percent. The evaluators believe that these small Monte Carlo uncertainties provide a discretized fixed source that will not contribute much to the overall uncertainty of the benchmark simulations. It is believed that the contribution to the overall uncertainty by this source is the same size or smaller than the uncertainty contributed to a tally in an eigenvalue simulation due to the correlation between starting points in fission neutron generations, which is usually unquantified.

To test the fidelity of the fixed source, four MCNP simulations were run to compare the collimator A tally results (all neutron and gamma tallies in collimator A):

- Simulation 1 – 1,006 energy groups with 8 cm^3 cylindrical mesh cells (highest fidelity)
- Simulation 2 – 1,006 energy groups with 16 cm^3 cylindrical mesh cells
- Simulation 3 – 200 energy groups with 8 cm^3 cylindrical mesh cells
- Simulation 4 – 200 energy groups with 16 cm^3 cylindrical mesh cells (lowest fidelity)

These four simulations all produced collimator A tally results that were statistically the same when the Monte Carlo uncertainties were less than 1 percent. This comparison provides some confidence that the coarse energy and spatial mesh are adequate. However, the fixed source with the finest energy and spatial fidelity is provided in Sect. 4.0 to ensure the uncertainty due to the discretization of the fixed source is negligible.

Finally, it should be pointed out that SCALE simulations were performed by the evaluators using a different discretization for the fixed-source, but they still produce similar computational results. The discretization scheme for the SCALE simulations uses the 200 neutron energy group structure for the energy distribution and a Cartesian mesh with cells of equal volume, approximately 1 cm^3 . This Cartesian mesh captures any azimuthal asymmetries that have been averaged out by the fixed source presented in Sect. 4.0.

2.3.2 Uranyl Nitrate Solution Isotopic Uncertainties – In Sect. 1.4.3 the uranium atom percentages of the fuel are presented in Table 1-12. This section also explains that the solution was last reprocessed in 1999, so the fuel used in this experiment contained fission products, daughters of fission products, and activation products, so the atom percentages in Table 1-13 are not exactly correct. The evaluators determined that the number of fission events since the solution was last reprocessed in 1999, $2.961\text{e}19$, is small compared to the number of uranium atoms in SILENE during this experiment, approximately $7.307\text{e}24$ ($6.83\text{e}24$ ^{235}U and $4.77\text{e}23$ ^{238}U). Furthermore, not all of the solution available for SILENE experiments was used during this experiment. In other words, the concentration of fission and activation products is diluted after each experiment when the solution in SILENE is drained back into the solution storage tanks. Therefore, the change in uranium atom percentages and the addition of fission products and activation products are negligible, and any associated changes in uncertainties are negligible as well. The addition of fission and activation products in the fuel solution does not statistically change any tally results with Monte Carlo uncertainties less than 1 percent.

ALARM-TRAN-AIR-SHIELD-001

2.4 Experimental and Benchmark Model Parameter Uncertainties

The following subsections provide details about the uncertainties of the individual parameters evaluated in the sensitivity / uncertainty analysis summarized in Sect. 2.5.

2.4.1 Geometric Dimension Uncertainties – Similar uncertainties were assigned to several dimensions in the benchmark model. Unless a specific dimension and uncertainty is discussed in the subsections following this one, these uncertainties apply.

Large distances, greater than 50 to 100 cm, were measured using a laser distance measuring device. These devices usually have an uncertainty of a couple of millimeters or less. This experiment showed that repeated measurements of distance from one location to another would often vary by several millimeters. This was likely because the surfaces between which the distances were measured were not perfectly parallel. One obvious example of this is the distance between any piece of equipment and the outside of the cylindrical SILENE reactor. Therefore, the uncertainty assigned to these distances is ± 1 cm.

Smaller distances, less than 50 to 100 cm, were measured using a meter stick or measuring tape where the smallest increment was millimeters. Also, some smaller dimensions were taken from drawings of equipment, such as drawings of the SILENE reactor and collimator boxes. These dimensions are expected to be accurate within ± 0.5 mm, so an uncertainty of $0.5/\sqrt{3}$ mm was assigned.

2.4.2 Material Density Uncertainties – Similar uncertainties were assigned to several material densities in the benchmark model. Unless a specific density and uncertainty is discussed in the subsections following this one, these uncertainties apply.

Several materials had their masses measured to determine the density, but no uncertainty was provided with the mass measurement. In these cases, a recommendation from the “ICSBEP Guide to the Expression of Uncertainties” is applied with a slight modification. If no uncertainty is provided, this recommendation suggests using an uncertainty that is half the last significant figure provided for a parameter. For example, if a density for lead were 11.344 g/cm^3 , then an uncertainty of 0.0005 g/cm^3 (half of 0.001 g/cm^3) could be assumed. This approximation can produce very small uncertainties, so in order to reduce the possibility of underestimating the uncertainty, half of the last *actual* digit, not the last significant digit, is going to be applied as the uncertainty. Returning to the lead example, the uncertainty is assumed to be $0.004 / 2 = 0.002 \text{ g/cm}^3$.

Several other materials did not have their masses measured to determine the density, and no uncertainty was provided. Most of these materials use a composition defined by a material standard provided in Sect. 1.0, along with a theoretical density. Since the actual density is unknown and no uncertainty is provided, the same recommendation from the “ICSBEP Guide to the Expression of Uncertainties” mentioned in the previous paragraph was considered. However, actual material densities often vary significantly from their theoretical densities, so the evaluators assumed that theoretical densities are only accurate to the smallest whole number (the digit to the left of the decimal point). Therefore, the recommendation provided by the “ICSBEP Guide to the Expression of Uncertainties” is applied to the *actual* digits following the decimal point, not just the last significant digit. For example, consider lead, but now with a theoretical density of 11.344 g/cm^3 . The assumed uncertainty is $0.344 / 2 = 0.172 \text{ g/cm}^3$.

ALARM-TRAN-AIR-SHIELD-001

2.4.3 Material Elemental Composition Uncertainties – All uncertainties on material compositions will use the expressions discussed in this section unless one of the following subsections discusses a specific material and provides a composition uncertainty. These uncertainties are all based on advice in the “ICSBEP Guide to the Expression of Uncertainties.”

If a composition defined by a material standard defines an element range $[a, b]$ of possible weight percentages, the benchmark model has used the midpoint of the range for the elemental weight percent. The applied uncertainty is $(b - a)/(2\sqrt{3})$.

If a composition defined by a material standard defines a maximum element weight percent ($\leq x$), the benchmark model uses $2x/3$ as the element weight percent. The applied uncertainty is $x/\sqrt{18}$.

If a chemical analysis of a material provides the minimum detectable limit of an element ($< x$), the benchmark model uses $x/2$ as the element weight percent. The applied uncertainty is also $x/2$ (i.e., the 2-sigma uncertainty is equal to the minimum detectable limit of the element).

Any other compositions, which are usually defined with a specific weight percentage, are believed to be accurate to two significant figures. To determine the uncertainty, the method applied to material densities in Sect. 2.4.2 is used. In this case, the uncertainty will equal half of the last significant digit and any following digits. For example, a weight percentage of 0.721 will have an uncertainty of $0.021 / 2 = 0.0105$.

One important exception to this discussion of material uncertainties concerns boron in the barite, magnetite, and standard concrete shield blocks. This exception is discussed in Sect. 2.2.7.

2.4.4 Shielding Blocks Composition Uncertainties – The elemental weight percentages of the barite, magnetite, and standard concrete compositions used in this benchmark are believed to have uncertainties of 0.005 weight percent. This applies to elements that are not defined by a minimum detectable limit ($< x$) nor Ba and S in the barite concrete. Since there is more uncertainty associated with the Ba and S content in the barite concrete (see Sect. 2.2.7), an uncertainty of 1.0 weight percent is applied to each of these elements.

The uncertainty associated with the density of the concrete shield blocks is assumed to be 5 percent. This is based on the discussion of mass and density of the shield blocks in Sect. 2.2.7. The Soutrenon and estimated densities discussed in Sect. 2.2.7 vary by 4 to 9 percent, but the evaluators are not certain what caused the barite concrete density to increase 9 percent. Applying an uncertainty of 5 percent will bound this range of variation on the 2-sigma confidence interval.

2.4.5 Shielding Blocks Orientation Uncertainties – The uncertainties associated with the dimensions of the concrete shield blocks used to construct the scattering box follow the logic described in Sect. 2.4.1. The orientation of the shielding blocks is related to this uncertainty, which refers to the angle between all of these blocks of concrete. The benchmark model describes the scattering box as though there is a 90 or 180-degree angle between all of the blocks of concrete. Sect. 1.2.6 discusses the gaps between the concrete shield blocks and the fact that the blocks do not fit together perfectly. Therefore, an uncertainty of 1 degree associated with the orientation of each concrete shield block in the scattering box is assumed.

ALARM-TRAN-AIR-SHIELD-001

2.4.6 PPB9 Uncertainties – PPB9 is similar to concrete in that a dry mixture and water are combined to create a wet paste that will dry, harden, and assume the shape of the container in which it dries. Therefore, the composition of PPB9, particularly the density and water content, changes as a function of time. The chemical analysis of PPB9 presented in Appendix H provides the composition and density at 3 unique stages, which are after mixing but before drying, after drying under normal conditions, and then after heating the dry mixture above 110 °C. The composition used in the benchmark model is the composition that exists after drying under normal conditions. However, the other two compositions represent the highest water content (before drying) and lowest water content (after heating). All composition uncertainties associated with the PPB9, including density, will use the range between the highest and lowest water content, [a, b]. The actual uncertainty (Δx) applied to parameter x associated with PPB9, following advice from the “ICSBEP Guide to the Expression of Uncertainties,” is

$$\Delta x = \frac{h}{\sqrt{3}} \left[1 - \left(\frac{\langle x \rangle - x_{mid}}{h} \right)^2 \right],$$

where $\langle x \rangle$ is the value used in the benchmark model (after drying under normal conditions), $x_{mid} = \frac{b+a}{2}$, and $h = \frac{b-a}{2}$. Here a and b represent the values of parameter x at the extremes, before drying and after heating, respectively.

2.4.7 Uranyl Nitrate Solution Uncertainties – Several parameters of the uranyl nitrate solution were reported by Valduc along with their respective uncertainties. The uncertainty of the uranium concentration in the solution is 0.05 g/L, and the uncertainty of the solution density is 0.00003 g/cm³. The reported uncertainty of the acid molarity (both H⁺ and NO₃⁻) is 0.03 moles/L. The enrichment was reported in units of atom percent, and the ²³⁵U content has an uncertainty of 0.02 percent (0.000015 weight fraction).

Section 1.7 notes that just before the critical excursion, the solution was about 20.3 degrees Celsius and the maximum solution temperature recorded during the critical excursion was about 53.65 degrees Celsius. Clearly the temperature of the solution changed during the critical excursion, but it is unknown exactly what the temperature was as a function of time as the fission events occurred. The evaluators have assumed that the temperature of the solution increased linearly with time (a right triangular distribution) between 20.3 and 53.65 degrees Celsius during the excursion. Following the guidance of the “ICSBEP Guide to the Expression of Uncertainties” for a triangular distribution from 20.3 to 53.65 degrees Celsius, where the most probable temperature is 20.3 degrees Celsius, a temperature uncertainty of $\Delta T / \sqrt{18}$ (7.86 degrees) will be applied. It is important to note this temperature uncertainty only applies to the fuel solution. All other temperatures are constant.

The density uncertainty provided by Valduc (0.00003 g/cm³) only pertains to the ability to measure the density of the fuel solution. In reality, there is a larger uncertainty associated with the density of the solution due to a change in the volume of the solution, which changes because of the change in temperature and fission product and radiolytic gases. Previous work^a has shown that a reasonable decrease in density (increase in volume) expected for this excursion is between 1.5 and 2 percent. Similar to the solution temperature uncertainty discussed previously, the evaluators have assumed that the fuel solution density decreased linearly with time during the excursion (a right triangular distribution). Therefore, the solution density is distributed between 1.15624 and 1.13312 g/cm³, where the most probable density is 1.15624, which results in a density uncertainty of $0.02 * \rho / \sqrt{18} = 0.00545$ g/cm³.

^a S. Sakurai, et. al., “Density Equations of UO₂(NO₃)₂-HNO₃ and UO₂(NO₃)₂-Gd(NO₃)₃-HNO₃ Solutions,” Journal of Nuclear Science and Technology, vol. 24[5], p. 415, 1987.

ALARM-TRAN-AIR-SHIELD-001

The height of the solution was reported without an uncertainty. Therefore, the method mentioned in Sect. 2.4.2 is used. The uncertainty will equal half of the last significant digit, which for this experiment is $0.001 / 2 = 0.0005$ cm.

2.4.8 Neutron Activation Foils Uncertainties – Finally, several parameters of the neutron activation foils had reported uncertainties or tolerances. All of the neutron activation foils have a 10 percent tolerance on thickness. Therefore, the uncertainty on foil thickness, t , is $(0.1 * t) / \sqrt{3}$ cm. Foils with A10 in their Table 1-14 reference name have a diameter tolerance of ± 0.2 mm. All the other foils have a diameter tolerance of ± 0.5 mm. The uncertainty applied to diameter is $0.2 / \sqrt{3}$ mm for the A10 foils and $0.5 / \sqrt{3}$ mm for the remaining foils. The uncertainty of the mass measurement of the foils is 0.2 percent.

2.5 Evaluation of the Experimental Data Uncertainties

Below is an evaluation of the experimental data uncertainties, which are grouped together in subsections by case number / measurement location. In this section, only the total experimental uncertainty for each measurement is presented. In other words, this section presents a summary of the entire sensitivity / uncertainty analysis. The detailed results of the sensitivity / uncertainty analysis with the uncertainty contribution of each individual experimental parameter analyzed are presented in Appendix I. The results of this sensitivity uncertainty analysis show that all detectors and reactions analyzed in this section have sufficiently small experimental uncertainties and therefore are acceptable as benchmark data.

In order to calculate the total experimental uncertainty for detector d, σ_{tot}^d , the uncertainty of each individual experimental parameter must first be established, σ_i (Sects. 2.2 through 2.4). These parameters are then perturbed and the absolute sensitivity of detector d with respect to experimental parameter i, S_i^d , is calculated. The uncertainty of detector d due to experimental parameter i, σ_i^d , is the product of the absolute sensitivity of detector d with respect to experimental parameter i and the uncertainty of experimental parameter i. The total experimental uncertainty of detector d is calculated by summing in quadrature the uncertainty of detector d due to each experimental parameter i; note this assumes all the experimental parameters are uncorrelated. This method to evaluate the total experimental uncertainty is shown below mathematically.

$$S_i^d = \frac{\Delta d}{\Delta x_i} \quad \sigma_i^d = S_i^d * \sigma_i \quad \sigma_{tot}^d = \sqrt{\sum_i (\sigma_i^d)^2}$$

ALARM-TRAN-AIR-SHIELD-001

2.5.1 Uncertainty Dependencies – The first step of this uncertainty analysis was to determine the parts of the benchmark model to which the measurement locations were sensitive. This was done in a gross manner by simply removing one item at a time from the benchmark model and then recalculating the detector responses. If there was no statistical difference in the detector responses with and without an item, then those detector responses were not sensitive to that part of the benchmark model. Note that this statistical comparison was made with Monte Carlo results that all had a statistical uncertainty of less than 1 percent (1-sigma). If no detector was sensitive to a part of the benchmark model, then that item was removed. If at least one detector was sensitive to a part of the benchmark model, then that item was not removed. However, if an item was left in the benchmark model, the results of this gross sensitivity calculation were used to guide the detailed uncertainty analysis. For example, all of the detectors are sensitive to portions of the SILENE critical assembly. Therefore, absolute sensitivity coefficients were calculated for all the detectors with respect to the critical assembly, and the SILENE assembly contributes to the experimental uncertainties of every detector. On the other hand, the detectors inside the scattering box are not sensitive to the components inside collimator B. Therefore, the experimental uncertainties for detectors inside the scattering box do not include contributions from collimator B. Table 2-13 presents the results of the gross sensitivity analysis. Table 2-13 lists each feature of the benchmark model that was evaluated in this gross analysis. If one or more detectors at a measurement location is sensitive to that feature, a “Y” is entered in the table. Then in the following subsections for each measurement location the total experimental uncertainty due to all these features are presented. The sensitivity and uncertainty due to each individual feature evaluated is listed in Appendix I. Finally, remember that sensitivity to these gross perturbations does not indicate a significant sensitivity or uncertainty contribution. For example, consider density, a 5 percent change in a material density may not make a significant change in a detector response. Removing the material entirely, as in this gross analysis, is equivalent to a 100 percent change in density. So values of “N” in Table 2-13 are the most meaningful, while values of “Y” mean more information / analysis is needed.

ALARM-TRAN-AIR-SHIELD-001

Table 2-13. Sensitivity / uncertainty dependency table

Benchmark model feature	CA	CB	FF	SB1	SB2	SB3	SB4
Detector diagnostics	N	N	N	N	N	N	N
Roof crane assembly	N	N	Y	Y	Y	Y	Y
Concrete walls, floor, and doors	Y	Y	Y	Y	Y	Y	Y
SILENE assembly wall	Y	Y	Y	Y	Y	Y	Y
Control rod	N	N	N	N	N	N	N
Foil holder handle, hook, and legs	N	N	N	N	N	N	N
Foil holder cover, body, and back	Y	Y	Y	N	N	N	N
Foil impurities (Except Mn in Fe foil)	N	N	N	N	N	N	N
Support stand inside collimator	N	N	N	N	N	N	N
Foil holder support bar	N	N	N	N	N	N	N
Collimator inner stainless steel	Y	Y	N	N	N	N	N
Collimator copper	Y	Y	N	N	N	N	N
Collimator lead	Y	Y	N	N	N	N	N
Collimator PPB9	Y	Y	N	N	N	Y	Y
Collimator outer stainless steel	N	N	N	N	N	N	N
Collimator wheels and housing	N	N	N	N	N	N	N
Entire collimator stand	N	N	N	N	N	Y	Y
Collimator stand support feet, hooks, slanted guide	N	N	N	N	N	N	N
Free field stand	N	N	N	N	N	N	N
Scattering box block s1	N	N	N	Y	Y	Y	Y
Scattering box block s2	N	N	N	Y	Y	Y	Y
Scattering box block s3	N	N	N	Y	Y	Y	Y
Scattering box block s4	N	N	N	Y	Y	Y	Y
Scattering box block s5	N	N	N	Y	Y	Y	Y
Scattering box block s6	N	N	N	Y	Y	Y	Y
Scattering box block s1 frame	N	N	N	N	N	N	N
Scattering box block s2 frame	N	N	N	N	N	N	N
Scattering box block s3 frame	N	N	N	N	N	N	N
Scattering box block s4 frame	N	N	N	N	N	N	N
Scattering box block s5 frame	N	N	N	N	N	N	N
Scattering box block s6 frame	N	N	N	N	N	N	N
Scattering box gaps	N	N	N	N	N	N	N
Scattering box Al mounting plates	N	N	N	Y	Y	Y	Y
Orientation of Al mounting plates with respect to concrete blocks	N	N	N	N	N	N	N
Entire scattering box stand	N	N	N	Y	Y	Y	Y
Scattering box support feet, trusses, and slanted guide	N	N	N	N	N	N	N
All CAAS detectors	N	N	N	N	N	N	N
All HBG and DXT TLDs	N	N	N	N	N	N	N
Al ₂ O ₃ TLD powder and body	N	N	N	N	N	N	N

The results in Table 2-13 indicate that the following items may be removed from the benchmark model.

- Detector diagnostics (Fig. 1-51)
- Control rod
- Foil holder handle, hook, and legs (Fig. 1-30)
- Foil impurities, except the Mn in the Fe foil
- Support stand inside collimator (Fig. 1-19)
- Foil holder support bar (Fig. 1-18)
- Stainless steel on the outside of the collimator
- Collimator wheels and housing (Fig. 1-9)
- Collimator stand support feet, lift points, slanted portion of the guide rail (Figs. 1-9 and 1-13)

ALARM-TRAN-AIR-SHIELD-001

- Free field stand (Fig. 1-32)
- Frames and lift points of the concrete blocks in the scattering box (Fig. 1-25)
- Gaps between the concrete blocks in the scattering box (Figs. 1-44 through 1-47)
- Non-parallel orientation of the Al mounting plates in the scattering box (Fig. 1-49)
- Scattering box support feet, trusses, and slanted guide (Fig. 1-36)
- All CAAS detectors
- All HBG and DXT TLDs
- Al_2O_3 TLD powder and body

Most items from the list above were removed from the benchmark model. The control rod was not removed in case eigenvalue calculations with the control rod are ever needed. The stainless steel on the outside of the collimator boxes, the concrete block frames in the scattering box, the gaps between the blocks in the scattering box, and the Al_2O_3 TLD powder and body were all left in order to have a more complete model. Removing these does not provide any significant modeling simplification. However, the scattering box concrete block lift points were evaluated as part of the block frames, and these were removed from the benchmark model. The calculated Al_2O_3 TLD doses using the flux-to-dose conversion factors discussed in Sect. 4 were statistically the same whether the TLD powder and body were modeled or not. While these have been left in the benchmark model, no further sensitivity / uncertainty analysis will be performed regarding these materials. The fact that the results with and without TLD powder and body are statistically the same indicate that it is not necessary to model the actual TLD when using the flux-to-dose conversion factors used in Sect. 4.0. This fact may not be true for other flux-to-dose conversion factors.

2.5.2 Case 1 Collimator A Uncertainties – The dependency Table 2-13 indicates that additional sensitivity / uncertainty analysis is needed for the detectors in collimator A with respect to:

- SILENE room
- SILENE assembly wall
- Collimator A inner layer of stainless steel
- Collimator A copper
- Collimator A lead
- Collimator A PPB9
- Collimator A foil holder
- Collimator A foils

The fuel solution and the position of collimator A within the room were not considered for Table 2-13 because these obviously must be included in this sensitivity / uncertainty analysis. Table 2-14 provides the total experimental uncertainty for each collimator A detector (σ_{tot}^d). The details of the uncertainty analysis results for collimator A are in Appendix I.1, which has tables listing the parameters being evaluated (including units), each parameter's uncertainty (σ_i), the absolute sensitivity of the detector response to that parameter (S_i^d), and the detector response uncertainty due to each parameter's uncertainty (σ_i^d).

The largest contributors to the uncertainties in Table 2-14 are first the uncertainty of the number of fission events and second the measurement uncertainty. Without these uncertainties, the relative experimental uncertainties in Table 2-14 would range from 1 to 3 percent. For the thermal reactions, the remaining uncertainty is primarily due to uncertainty in the thickness of the foils, the PPB9 density and boron content, and distance from SILENE (order of decreasing importance). For the threshold reactions, the uncertainty remaining is primarily due to the distance from SILENE and the solution density (also order of decreasing importance). Finally, the TLD remaining uncertainty is primarily due to the distance from SILENE.

ALARM-TRAN-AIR-SHIELD-001

Table 2-14. Case 1 collimator A detector total experimental uncertainties

Detector / reaction	Absolute experimental uncertainty (Bq/g or Gy)	Relative experimental uncertainty
$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	4.394E+00	0.0665
$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	6.444E+05	0.0707
$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	5.061E+02	0.0630
$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.322E-02	0.0641
$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	1.484E+02	0.0643
$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	3.905E+00	0.0639
$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	9.023E-01	0.0628
Al_2O_3	5.186E-01	0.0785

2.5.3 Case 2 Collimator B Uncertainties – The dependency Table 2-13 indicates that additional sensitivity / uncertainty analysis is needed for the detectors in collimator B with respect to:

- SILENE room
- SILENE assembly wall
- Collimator B inner layer of stainless steel
- Collimator B copper
- Collimator B lead
- Collimator B PPB9
- Collimator B foil holder
- Collimator B foils

The fuel solution, the position of collimator B within the room, and details about the barite concrete shielding collimator B were not considered for Table 2-13 because these obviously must be included in this sensitivity / uncertainty analysis. Table 2-15 provides the total experimental uncertainty for each collimator B detector (σ_{tot}^d). The details of the uncertainty analysis results for collimator B are in Appendix I.2, which includes tables listing the parameters being evaluated (including units), each parameter's uncertainty (σ_i), the absolute sensitivity of the detector response to that parameter (S_i^d), and the detector response uncertainty due to each parameter's uncertainty (σ_i^d).

The largest contributors to the uncertainties in Table 2-15 vary based on the reaction type. For the thermal reactions, the largest contributors are the uncertainty of the number of fission events and the barite concrete density uncertainty (in order of decreasing importance). For the threshold reactions, that order is reversed, and the barite concrete density uncertainty is much more important than the number of fissions uncertainty. The next largest contributors to the thermal reaction uncertainties, in order of decreasing importance, are the uncertainties of the measurements, the foil thickness, PPB9 density and B content, and distance from SILENE. For the threshold reactions, the next largest contributors to the uncertainties are the measurement, the Ba content of the barite concrete, and the distance from SILENE (in order of decreasing importance). For the TLD, the measurement, barite concrete density, and number of fission event uncertainties contribute about equally and make up practically all of the experimental uncertainty.

ALARM-TRAN-AIR-SHIELD-001

Table 2-15. Case 2 collimator B detector total experimental uncertainties

Detector / reaction	Absolute experimental uncertainty (Bq/g or Gy)	Relative experimental uncertainty
$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	1.839E+00	0.0820
$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.031E+03	0.0837
$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	2.541E+05	0.0847
$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	1.362E+02	0.1139
$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	3.776E-03	0.1214
$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	6.087E+01	0.0781
$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	1.337E+00	0.1337
$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	2.477E-01	0.1169
Al_2O_3	8.035E-02	0.0980

2.5.4 Case 3 Free Field Location Uncertainties – The dependency Table 2-13 indicates that additional sensitivity / uncertainty analysis is needed for the detectors at the free field location with respect to:

- SILENE room
- SILENE assembly wall
- Free field foil holder
- Free field foils

The fuel solution and the position of the free field location within the room were not considered for Table 2-13 because these obviously must be included in this sensitivity / uncertainty analysis. Table 2-16 provides the total experimental uncertainty for each free field detector (σ_{tot}^d). The details of the uncertainty analysis results for the free field are in Appendix I.3, which has tables listing the parameters being evaluated (including units), each parameter's uncertainty (σ_i), the absolute sensitivity of the detector response to that parameter (S_i^d), and the detector response uncertainty due to each parameter's uncertainty (σ_i^d).

The thermal reaction uncertainties at the free field location are dominated by the number of fission event uncertainties and the foil thickness uncertainties. These are followed up by uncertainties associated with the concrete wall of the SILENE room, the solution density, and distance from SILENE. The free field threshold reaction uncertainties are dominated by the uncertainty of the number of fission events. This is followed up by the measurement uncertainties, the distance from SILENE, and the solution density. The TLD uncertainty is dominated by the uncertainty of the number of fission events and measurement uncertainties. After that, only distance from SILENE makes a large contribution to the TLD uncertainty.

ALARM-TRAN-AIR-SHIELD-001

Table 2-16. Case 3 free field location detector total experimental uncertainties

Detector / reaction	Absolute experimental uncertainty (Bq/g or Gy)	Relative experimental uncertainty
$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	4.401E+00	0.0665
$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.510E+03	0.0649
$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	6.237E+05	0.0710
$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	4.306E+02	0.0628
$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.260E-02	0.0642
$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	1.526E+02	0.0635
$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	3.799E+00	0.0643
$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	8.168E-01	0.0629
Al_2O_3	2.929E-01	0.0787

2.5.5 Case 4 Scattering Box Position 1 Uncertainties – The dependency Table 2-13 indicates that additional sensitivity / uncertainty analysis is needed for the detectors at scattering box position 1 with respect to:

- SILENE room
- SILENE assembly wall
- The Scattering box magnetite and standard concrete blocks
- Scattering box position 1 Al mounting plate
- Scattering box support stand
- Scattering box position 1 foils

The fuel solution and the position of the scattering box within the room were not considered for Table 2-13 because these obviously must be included in this sensitivity / uncertainty analysis. Table 2-17 provides the total experimental uncertainty for each scattering box position 1 detector (σ_{tot}^d). The details of the uncertainty analysis results for the scattering box position 1 are in Appendix I.4, which has tables listing the parameters being evaluated (including units), each parameter's uncertainty (σ_i), the absolute sensitivity of the detector response to that parameter (S_i^d), and the detector response uncertainty due to each parameter's uncertainty (σ_i^d).

The thermal reaction uncertainties at scattering box position 1 are primarily due to the measurement, number of fission events, and plastic bag uncertainties. These contributors to the thermal reactions are followed up by the foil thickness and the magnetite concrete density uncertainties. The measurement, number of fission events, and plastic bag uncertainties also make large contributors to the threshold reaction uncertainties for position 1 in the scattering box, but the single largest contributor for the threshold reactions is the magnetite concrete density uncertainty. For the TLD at this position, the largest contributions come from the number of fission events and measurement uncertainties, and a smaller amount is attributed to the magnetite concrete density uncertainty.

ALARM-TRAN-AIR-SHIELD-001

Table 2-17. Case 4 scattering box position 1 detector total experimental uncertainties

Detector / reaction	Absolute experimental uncertainty (Bq/g or Gy)	Relative experimental uncertainty
$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	1.717E+00	0.0771
$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	1.957E+03	0.0811
$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	2.061E+05	0.0761
$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	5.323E+01	0.1014
$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.284E-03	0.1213
$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	5.677E+01	0.0670
$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	8.094E-02	0.1146
Al_2O_3	4.910E-02	0.0847

2.5.6 Case 5 Scattering Box Position 2 Uncertainties – The dependency Table 2-13 indicates that additional sensitivity / uncertainty analysis is needed for the detectors at scattering box position 2 with respect to:

- SILENE room
- SILENE assembly wall
- The scattering box magnetite and standard concrete blocks
- Scattering box position 2 Al mounting plate
- Scattering box support stand
- Scattering box position 2 foils

The fuel solution and the position of the scattering box within the room were not considered for Table 2-13 because these obviously must be included in this sensitivity / uncertainty analysis. Table 2-18 provides the total experimental uncertainty for each scattering box position 2 detector (σ_{tot}^d). The details of the uncertainty analysis results for the scattering box position 2 are in Appendix I.5, which has tables listing the parameters being evaluated (including units), each parameter's uncertainty (σ_i), the absolute sensitivity of the detector response to that parameter (S_i^d), and the detector response uncertainty due to each parameter's uncertainty (σ_i^d).

The thermal reaction uncertainties at scattering box position 2 are primarily due to the measurement, number of fission events, and plastic bag uncertainties. These contributors to the thermal reactions are followed up by the foil thickness and, to a lesser degree, the standard and magnetite concrete density uncertainties. The measurement, number of fission events, and plastic bag uncertainties also make large contributors to the threshold reaction uncertainties for position 2 in the scattering box, but the single largest contributor for the threshold reactions is the magnetite concrete density uncertainty. The standard concrete density contribution is negligible for threshold reactions. For the TLD at this position, the largest contributions come from the number of fission events and measurement uncertainties, and a smaller amount is attributed to the magnetite concrete density uncertainty. Again, the standard concrete density contribution is negligible.

ALARM-TRAN-AIR-SHIELD-001

Table 2-18. Case 5 scattering box position 2 detector total experimental uncertainties

Detector / reaction	Absolute experimental uncertainty (Bq/g or Gy)	Relative experimental uncertainty
$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	1.821E+00	0.0712
$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	1.759E+03	0.0693
$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.570E-02	0.1231
Al_2O_3	3.598E-02	0.0818

2.5.7 Case 6 Scattering Box Position 3 Uncertainties – The dependency Table 2-13 indicates that additional sensitivity / uncertainty analysis is needed for the detectors at scattering box position 3 with respect to:

- SILENE room
- SILENE assembly wall
- The scattering box magnetite and standard concrete blocks
- Scattering box position 3 Al mounting plate
- Scattering box support stand
- Scattering box position 3 foils

The fuel solution and the position of the scattering box location within the room were not considered for Table 2-13 because these obviously must be included in this sensitivity / uncertainty analysis. Table 2-19 provides the total experimental uncertainty for each scattering box position 3 detector (σ_{tot}^d). The details of the uncertainty analysis results for the scattering box position 3 are in Appendix I.6, which has tables listing the parameters being evaluated (including units), each parameter's uncertainty (σ_i), the absolute sensitivity of the detector response to that parameter (S_i^d), and the detector response uncertainty due to each parameter's uncertainty (σ_i^d).

The thermal reaction uncertainties at scattering box position 3 are primarily due to the number of fission events and foil thickness uncertainties. These contributors to the thermal reactions are followed up by the measurement and plastic bag uncertainties. The solution and standard concrete density uncertainties also make a small contribution. The measurement, number of fission events, and plastic bag uncertainties make the largest contributors to the threshold reaction uncertainties for position 3 in the scattering box. For the TLD at this position, the largest contributions come from the number of fission events and measurement uncertainties.

Table 2-19. Case 6 scattering box position 3 detector total experimental uncertainties

Detector / reaction	Absolute experimental uncertainty (Bq/g or Gy)	Relative experimental uncertainty
$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	3.062E+00	0.0695
$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	3.034E+03	0.0680
$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	2.140E-01	0.0661
Al_2O_3	1.376E-01	0.0782

ALARM-TRAN-AIR-SHIELD-001

2.5.8 Case 7 Scattering Box Position 4 Uncertainties – The dependency Table 2-14 indicates that additional sensitivity / uncertainty analysis is needed for the detectors at scattering box position 4 with respect to:

- SILENE room
- SILENE assembly wall
- The scattering box magnetite and standard concrete blocks
- Scattering box position 4 Al mounting plate
- Scattering box support stand
- Scattering box position 4 foils

The fuel solution and the position of the scattering box location within the room were not considered for Table 2-13 because these obviously must be included in this sensitivity / uncertainty analysis. Table 2-20 provides the total experimental uncertainty for each scattering box position 4 detector (σ_{tot}^d). The details of the uncertainty analysis results for the scattering box position 4 are in Appendix I.7, which has tables listing the parameters being evaluated (including units), each parameter's uncertainty (σ_i), the absolute sensitivity of the detector response to that parameter (S_i^d), and the detector response uncertainty due to each parameter's uncertainty (σ_i^d).

The thermal reaction uncertainties at scattering box position 4 are primarily due to the number of fission events and foil thickness uncertainties. These contributors to the thermal reactions are followed up by the measurement, plastic bag, and the standard concrete shield block (mounting block) orientation uncertainties. The solution density uncertainty also makes a small contribution. The measurement, number of fission events, and plastic bag uncertainties make the largest contributors to the threshold reaction uncertainties for position 4 in the scattering box. For the TLD at this position, the largest contributions come from the number of fission events and measurement uncertainties.

Table 2-20. Case 7 scattering box position 4 detector total experimental uncertainties

Detector / reaction	Absolute experimental uncertainty (Bq/g or Gy)	Relative experimental uncertainty
$^{59}\text{Co}(n,\gamma)^{60}\text{Co}$	2.804E+00	0.0702
$^{197}\text{Au}(n,\gamma)^{198}\text{Au}$	2.652E+03	0.0685
$^{58}\text{Ni}(n,p)^{58}\text{Co}$	2.189E-01	0.0657
Al_2O_3	1.696E-01	0.0907

ALARM-TRAN-AIR-SHIELD-001

3.0 BENCHMARK SPECIFICATIONS

3.1 Description of Model

The benchmark model closely follows the description of the experiment in section 1.0. Therefore, only a brief summary will be given here by describing the overview image of the model shown in Fig. 3-1. Following this summary is a description of a few simplifications that were made to create the benchmark model and what impact these simplifications had on the benchmark results. These simplifications are described individually, but their impact on the benchmark results are presented collectively. This is done because no simplifications that can be completely quantified were made that had a statistically significant impact on the Monte Carlo results with relative uncertainties less than 1%. Specific details about dimensions and materials of the benchmark model are given in sections 3.2 and 3.3, respectively.

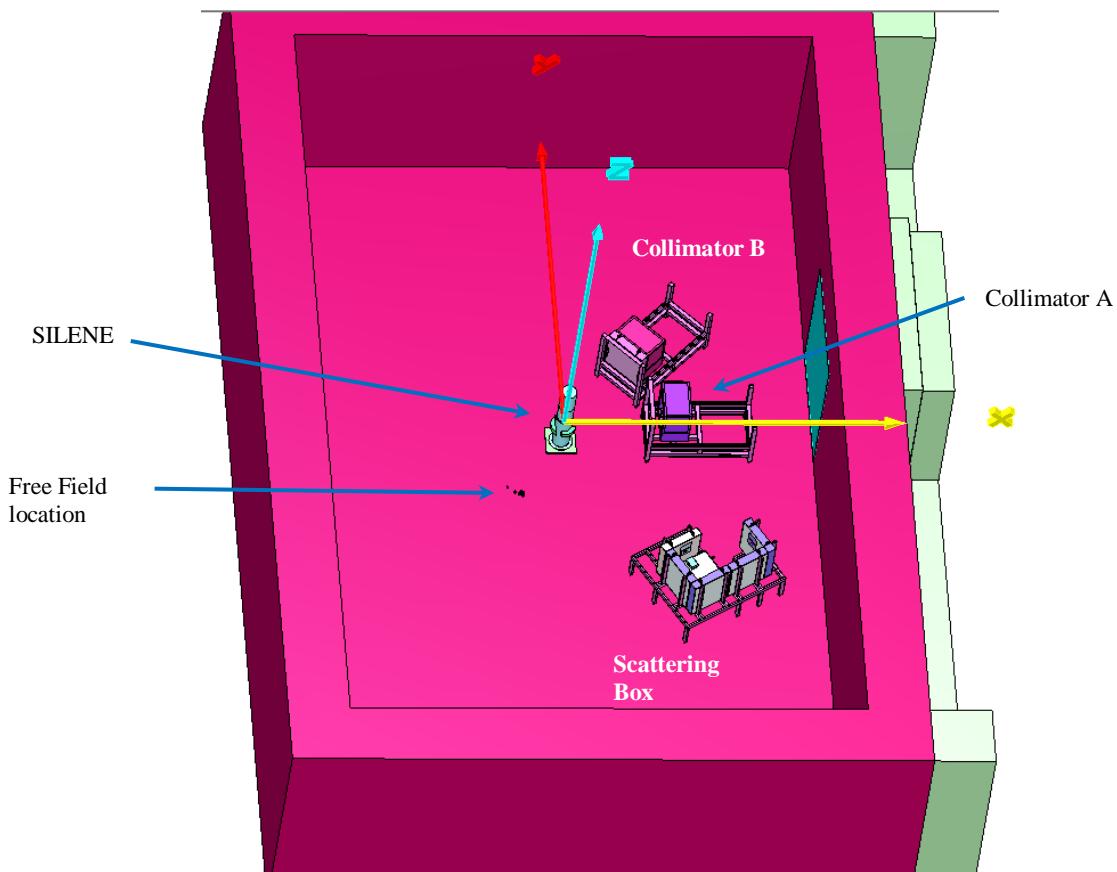


Fig. 3-1. Benchmark model overview.

The top half of the SILENE room has been removed in Fig. 3-1, and the air composition has been hidden so the details within the room can be seen. The SILENE critical assembly, while not at the exact center of the room it is located in, is the center of this experiment and is the tall cylinder near the center of the benchmark model in Fig. 3-1. Notice the x-, y-, and z-axis in Fig. 3-1 that define the coordinate system of the benchmark model. The origin of this coordinate system is at the center of SILENE, so the z-axis and cylindrical axis of SILENE are the same. The (x,y) plane (i.e., z = 0) is 1 meter above the concrete floor, which is equivalent to a solution height inside SILENE of 0 cm.

ALARM-TRAN-AIR-SHIELD-001

Starting at the top of the model in Fig. 3-1 moving clockwise around SILENE, there are 4 measurement locations in the benchmark model: collimator B (case 2), collimator A (case 1), the scattering box, and the free field location (case 3). Collimator A, collimator B, and the free field location each contain a full set of neutron activation foils and a full set of TLDs. Within the scattering box there were 4 positions with neutron activation foils and TLDs. Position 1 (case 4) had a full set of neutron activation foils, while positions 2 – 4 had a partial set of foils. Positions 1 and 2 (case 5) had a full set of TLDs, while positions 3 (case 6) and 4 (case 7) only had a Valduc Al₂O₃ TLD. Figure 3-1 shows the large shielding doors and the portion of the hall outside the SILENE room that has been included in the benchmark model.

3.1.1 Simplification: SILENE Room Details – Many details about additional equipment in the SILENE room that surround the equipment directly involved in the experiments has been left out of the benchmark model. In fact, these details have not even been described in Sect. 1.0. Examples of these types of details are evident in many of the photographs in Sect. 1.0. The uncertainty analysis in Sect. 2.0 has shown that some of the equipment directly involved in the experiment has little effect on other parts of the experiment. A specific example is the detector diagnostics and stands have little effect on any of the measurements. Therefore, all of this additional equipment has been left out of the benchmark model, and no additional analysis has been performed to evaluate the effect of this equipment.

3.1.2 Unquantifiable Simplifications – There are a couple of simplifications in the benchmark model whose impact cannot be completely quantified. Only a little detail is discussed about these items in Sect. 1.0 because important information that is needed to quantify the impact on the benchmark is missing.

The first of these simplifications is not including the plastic bags and tape that support the neutron activation foils in the scattering box. These can be seen in Figs. 1-69, 1-71, and 1-73. The experimenters expected that a single plastic bag would not have any impact on the foil activations, and this is true. However, layering multiple bags on top of each other when mounting the foils (one bag per foil) adds up and has a small but statistically significant impact. These plastic bags have been accounted for by increasing the benchmark uncertainty.

No measurements were made for temperature, pressure, or humidity of the air in the SILENE room during the experiment. Therefore, the second simplification is assuming the air in the SILENE room is 20 °C at 50% humidity with a density of 1.130e-3 g/cm³.

The third of these unquantifiable simplifications deals with the fuel, production of neutrons, and production of activation products. Clearly all the neutrons were not born at the same time, which is illustrated in Fig. 1-75. Furthermore, all the neutrons did not arrive at the foils and create activation products at the same time. To simplify the benchmark model, the source is not time dependent, so all prompt and delayed fission neutrons are born at 0 sec. The activation products are assumed to be created at the same time, 0 sec, so there is no buildup of activation products in the benchmark model. Finally, bubbles form in the fuel, which sloshes around during the critical pulse. Therefore, the geometry, temperature, and density of the fuel solution changes with time, but these have been ignored to simplify the benchmark model.

The final simplification is related to the third one. Not all the dose deposited in the TLDs is from prompt fission photons and other secondary photons created from neutron interactions. Photons born from fission product decay and decay of activation products within the SILENE room should also be included. Therefore, the source of photons should also be time dependent. Again, this has been excluded from the benchmark model in order to simplify it.

ALARM-TRAN-AIR-SHIELD-001

3.1.3 All Other Simplifications – All the remaining simplifications have been fully investigated and found to make a negligible impact on the benchmark model. In this instance, the term *negligible* means statistically insignificant when comparing Monte Carlo results with statistical uncertainties less than 1 percent. This holds true whether making a single one of these simplification or all of these simplifications simultaneously. This implies that the impact of these simplifications on the benchmark values is less than 1 percent.

- Collimator boxes A and B
 - Removal of the CIDAS and Rocky Flats CAAS detectors
 - Removal of the support stand inside the collimator
 - Removal of the ORNL TLDs
 - Removal of the bar that supports that neutron activation foil holder
- Collimator support stands
 - Removal of the support feet (blue and black portions on the floor in Fig. 1-9)
 - Removal of the handles / hooks on the side and top of the stands
 - Removal of the slanted portion of the collimator box guide plate on the side of the stands
- Neutron activation foil holders
 - Removal of the handle on the front
 - Removal of the hook on the back of the holder
 - Removal of the support legs on the back
- Entire support stand at the free field location removed
- Hooks / lift points on all concrete blocks removed
- Scattering box
 - Removal of the CIDAS and Rocky Flats CAAS detectors
 - Removal of the ORNL TLDs
 - Bottom aluminum support plate not slanted
 - Average value of the gaps between concrete blocks has been used (specific details provided in Sect. 3.2.6)
- Scattering box support stand
 - Removal of the support feet (black portions on the floor in Fig. 1-36)
 - Removal of the trusses under the scattering box
 - Removal the slanted plate next to block S2
- Removal of the diagnostics and support tables in Fig. 1-51

Section 2.0 specifies that the computational results for the TLD were statistically the same with or without the TLD body and powder. Therefore, inclusion of the TLD in the benchmark model is optional. A volume of air about the same size as the TLD could be used in place of the actual TLD. All of the example results provided in this report have included the TLD body and powder as described later in Sect. 3.0.

3.2 Dimensions

The dimensions used to construct the benchmark model are presented below, along with the location of each piece of equipment within the model.

3.2.1 SILENE Room – The walls, floor, and ceiling of the SILENE reactor cell are constructed of concrete (SILENE concrete). Figures 3-2 through 3-4 show the dimensions of the SILENE room used while constructing the benchmark model (concrete is pink and air is blue).

ALARM-TRAN-AIR-SHIELD-001

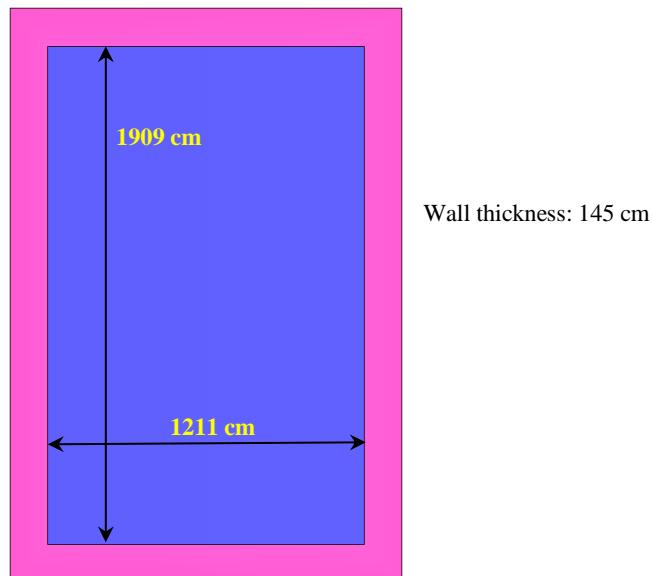


Fig. 3-2. XY View of the SILENE room.

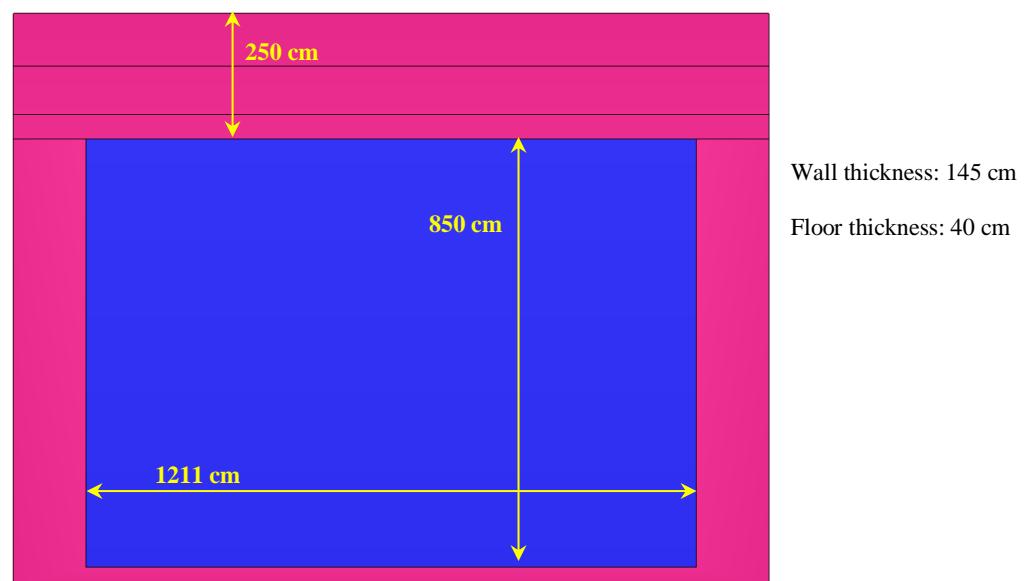


Fig. 3-3. XZ view of the SILENE room.

ALARM-TRAN-AIR-SHIELD-001

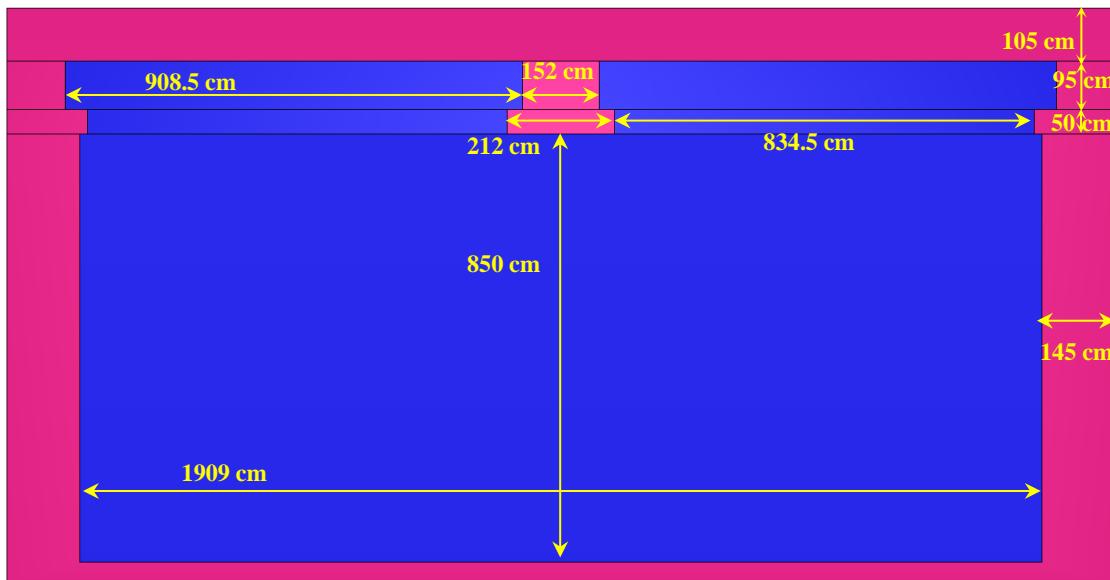


Fig. 3-4. YZ view of the SILENE room.

Figures 3-5 and 3-6 show dimensions of the doors to the SILENE room and the portion of the hall outside the SILENE room included in the benchmark model (all SILENE concrete). The benchmark model of the hollow steel entrance doors into the SILENE room have outside dimensions of $300 \times 349 \times 5.5$ cm. The thickness of the steel is 2 mm on all sides, so the internal dimensions of the steel doors are $299.6 \times 348.6 \times 5.1$ cm. The concrete threshold below the steel doors is 1 cm tall and 5.5 cm wide (same width as the steel doors). These thresholds are 300 cm long, so they are the same length as the opening in the concrete wall.

ALARM-TRAN-AIR-SHIELD-001

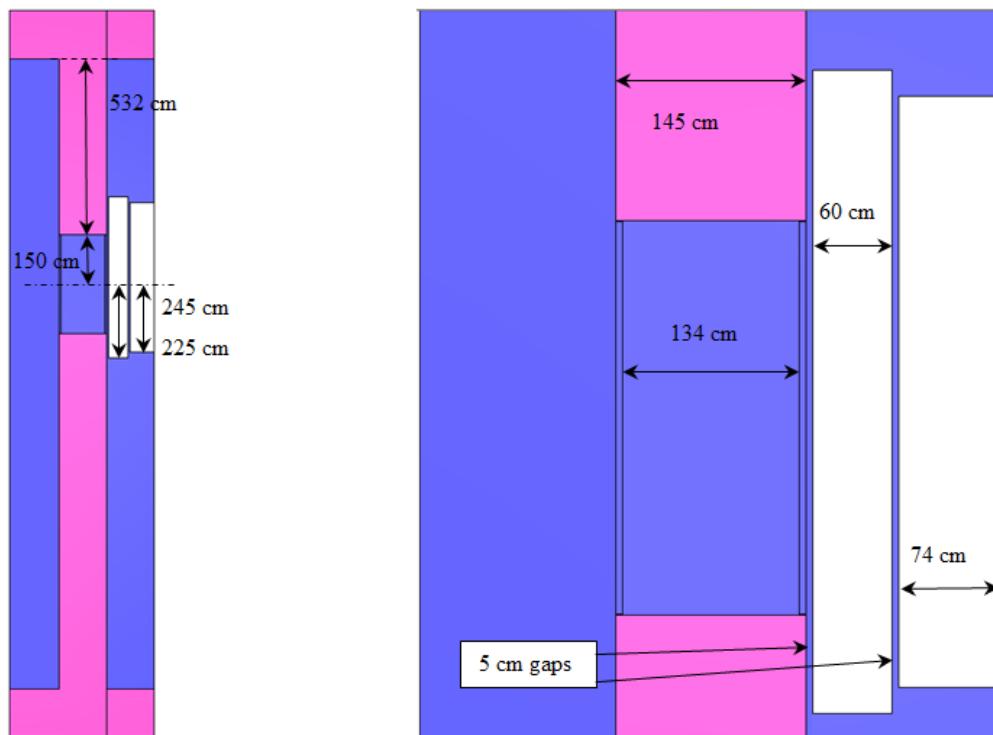


Fig. 3-5. XY view of the SILENE room doors and hall.

ALARM-TRAN-AIR-SHIELD-001

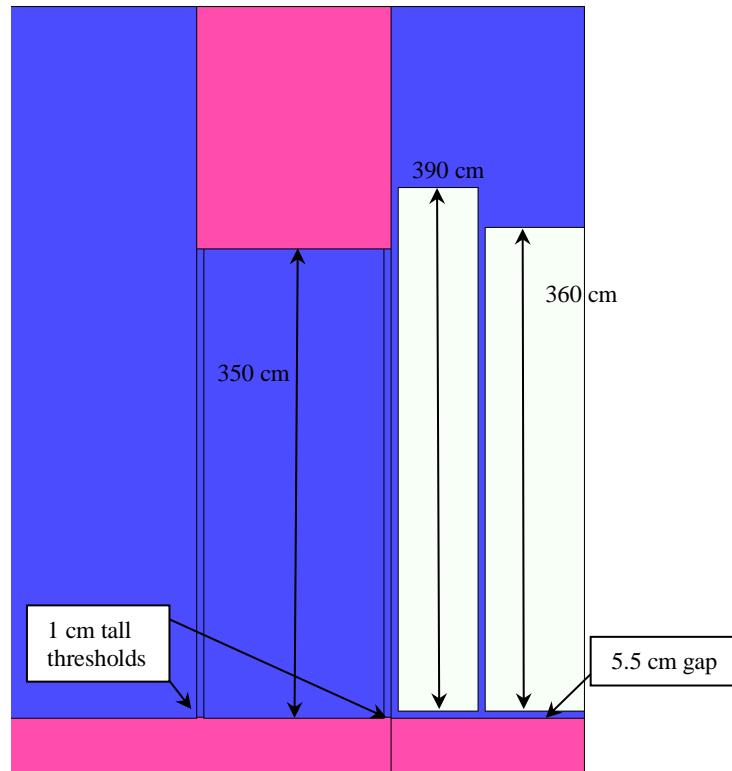


Fig. 3-6. XZ view of the SILENE room doors and hall.

Finally, the location of the center of SILENE (z-axis) is shown in Fig. 3-7.


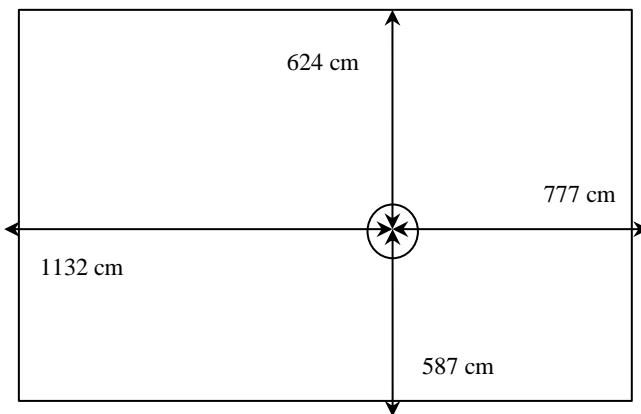


Fig. 3-7. SILENE location in benchmark model.

ALARM-TRAN-AIR-SHIELD-001

3.2.2 Collimator Boxes – Each collimator box is open on one side, which is the side facing SILENE. In this experiment, collimator A was unshielded, so the detectors inside had direct line of sight to SILENE. Collimator B was shielded by 20 cm of barite concrete. Each collimator consists of several layers of material. The structure of these layers, starting on the interior surface and moving toward the exterior surface, is 0.2 cm of stainless steel, 0.5 cm of copper, 1 cm of lead, 15 cm of PPB9, and 0.2 cm of stainless steel. The layers of the collimator outside the PPB9 vary close to the corners and edges of the collimator because there is a 0.5 cm thick stainless steel frame. The outermost 0.2 cm thick layer of stainless steel is attached to this frame, but it does not cover the entire frame. It is assumed that the PPB9 was poured into the collimator box once most of the outer layer of stainless steel had been attached to the frame. Figure 3-8 shows the entire collimator model and dimensions for the internal cavity. Figure 3-9 shows the different material layers that create the collimator box. Figure 3-10 shows the stainless steel frame, and Fig. 3-11 shows the outer most layer of stainless steel that attaches to the frame. Notice the small gaps in Fig. 3-11. These account for the fact that the outer layer of stainless steel does not cover the entire frame.

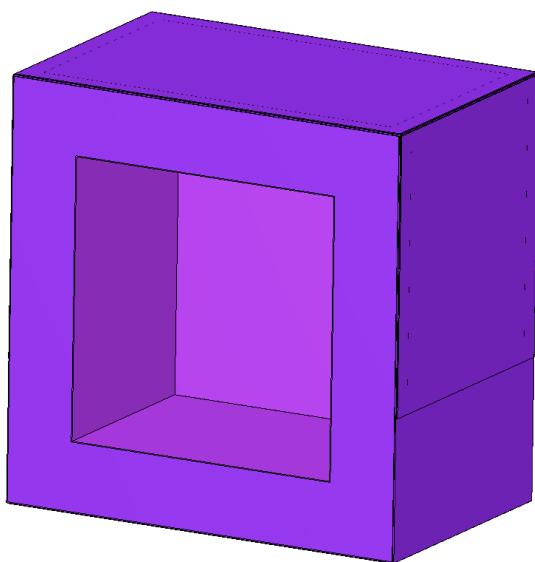

Collimator internal cavity

- Height: 66.2 cm
- Width: 66.2 cm
- Depth (dimension into page): 48.1 cm

Fig. 3-8. Overall collimator model with internal cavity.

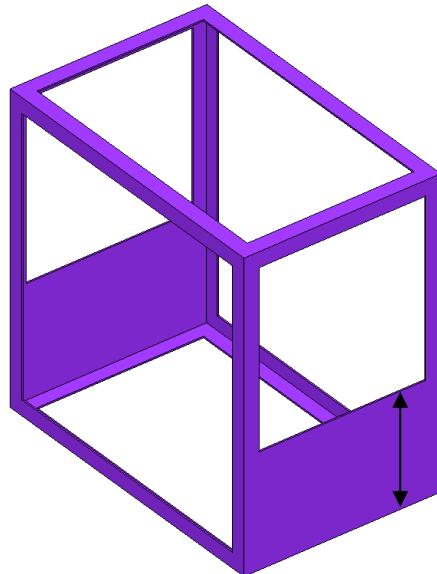


Fig. 3-9. Internal material layers of collimator model (blue indicates air).

ALARM-TRAN-AIR-SHIELD-001

Dimensions of openings in frame
(height × width × depth):

- Front/back: 89.2 cm × 89.2 cm × 0.5 cm
- Left/right: 57.2 cm × 0.5 cm × 54.4 cm
- Top/bottom: 0.5 cm × 89.2 cm × 54.4 cm



External dimensions:


- Height: 99.2 cm
- Width: 99.2 cm
- Depth: 64.4 cm
- Thickness of stainless steel: 0.5cm

External dimensions of outer
stainless steel
(height × width × depth):

- Front/back: 98.6 cm × 98.6 cm × 0.2 cm
- Left/right: 65.4 cm × 0.2 cm × 63.8 cm
- Top/bottom: 0.2 cm × 98.6 cm × 63.8 cm

Dimensions of opening in front
(height × width × depth):

- 66.2 cm × 66.2 cm × 0.2 cm

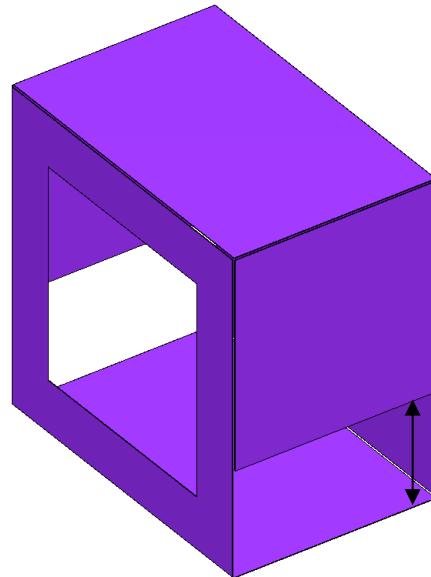

The external stainless steel does not entirely cover the frame shown in Figure 3-10. The edge of each external sheet is 0.5 cm from the edge of the frame, except for the bottom edge of the left and right pieces. The center of each piece lines up with the center of the face of the frame it is covering, again, except on the left and right.

- Thickness of stainless steel: 0.2 cm

Fig. 3-10. Collimator stainless steel frame.

The collimator boxes each sit atop a support stand. The support stands also support any shielding material placed between the collimator and SILENE, which was the case of collimator B. Figures 3-12 through 3-14 show dimensions of the collimator support stand. The collimator support stands are made of carbon steel that is 0.5 cm thick. Finally, the location of both collimator stands, both collimators, and the collimator B shielding within the SILENE room are given in Fig. 3-15. Note that collimator A is not perfectly centered with respect to SILENE. Rather, collimator A is slightly offset (0.5 cm) towards the scattering box.

ALARM-TRAN-AIR-SHIELD-001

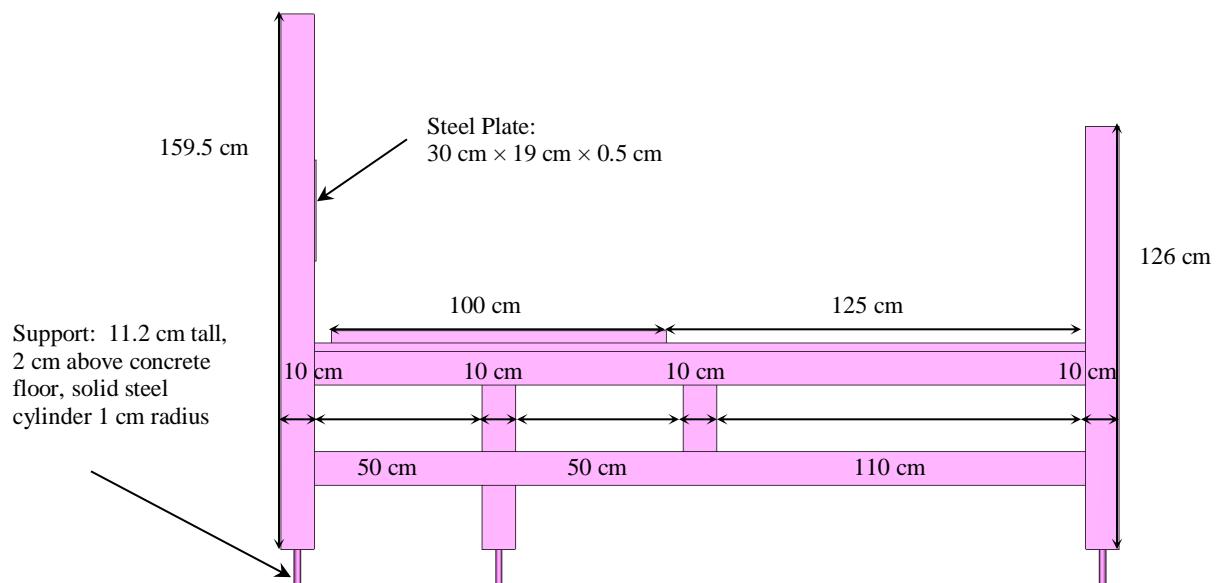


Fig. 3-12. XZ view of the collimator stand.

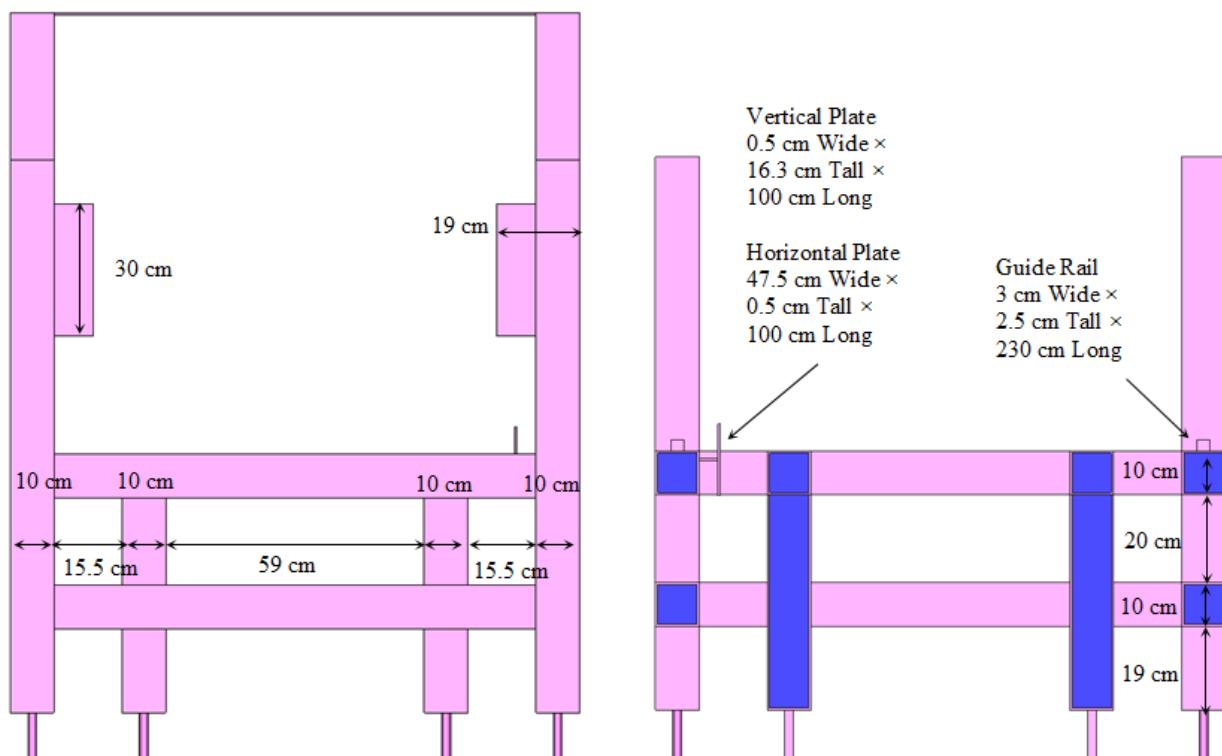


Fig. 3-13. YZ view of the collimator stand (left, looking towards SILENE [-x]; right, looking towards reactor cell doors with part nearest SILENE removed [+x]).

ALARM-TRAN-AIR-SHIELD-001



Fig. 3-14. XY View of the collimator stand.

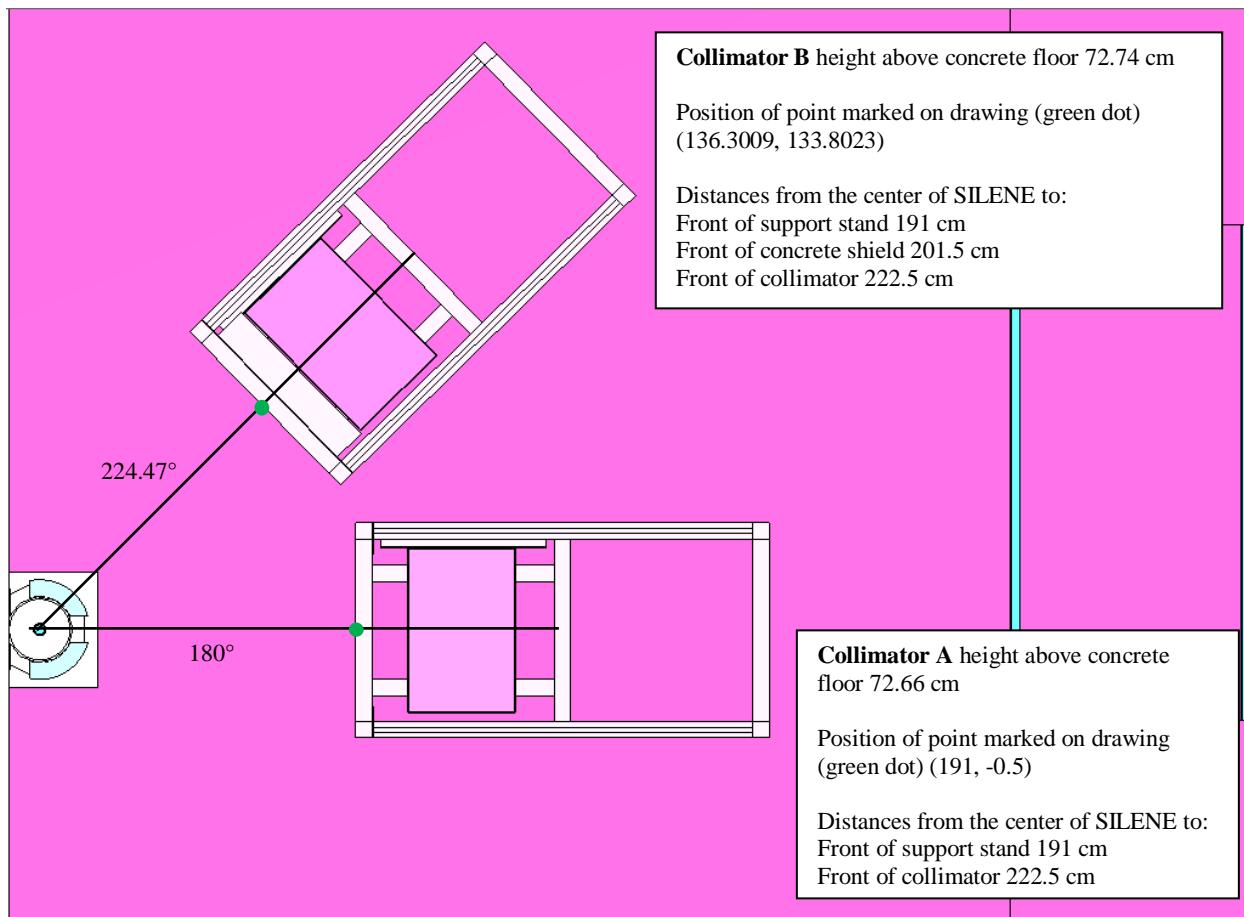


Fig. 3-15. Location of the collimator stands, collimators, and collimator B shielding.

ALARM-TRAN-AIR-SHIELD-001

The angle of rotation and translation for collimator B in Fig. 3-15 was determined using the measurements in Fig. 1-21. Several of these measurements provide different distances from collimator B and its stand to the walls of the SILENE room. With these distances, dimensions of the collimator B and its stand, and trigonometry this rotation and translation can be reproduced.

3.2.3 Collimator B Shielding – The shielding in front of collimator B was a 20 cm thick block of barite concrete. The benchmark model of this shielding block is shown in Fig. 3-16. This same geometric model is used for the concrete blocks used to construct the scattering box.

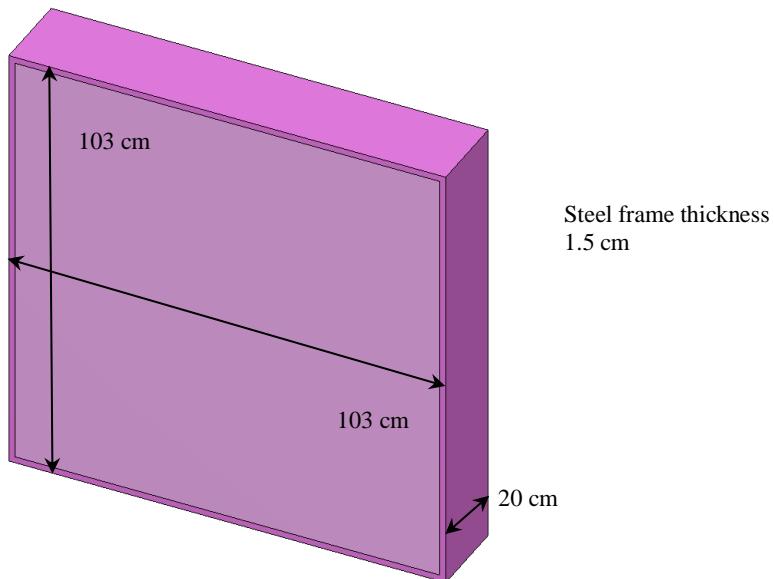


Fig. 3-16. Concrete shield block model.

3.2.4 Simplified Foil Holder Model – The foil holder has been simplified to reduce the complexity of the benchmark model. The details that were removed have a statistically insignificant effect on the benchmark model results. Figures 3-17 through 3-19 show the dimensions of the simplified foil holder model.

ALARM-TRAN-AIR-SHIELD-001

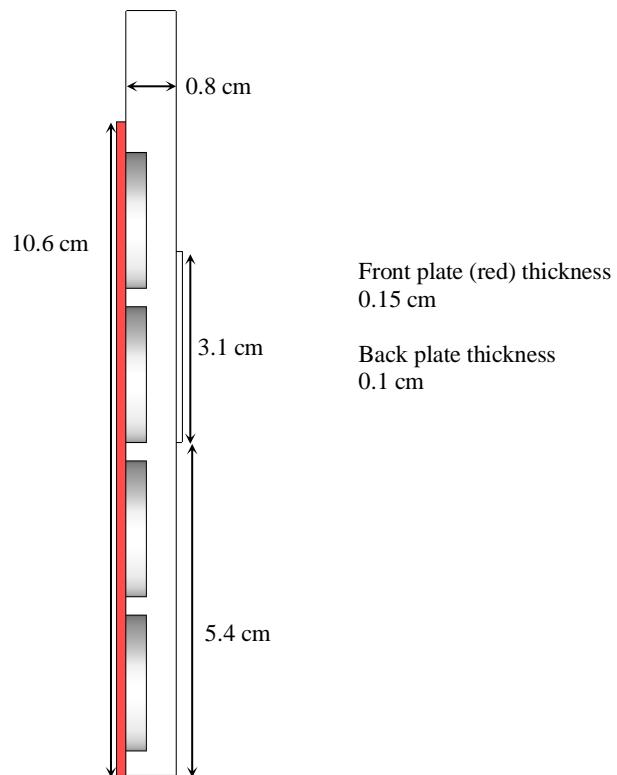


Fig. 3-17. XZ view of the foil holder model.

There is 2.25 cm between the side of the holder and the center of the nearest holes, and 1.5 cm between the bottom of the holder and the center of the nearest holes.

The hole diameter is 2.2 cm, and the holes are 0.32 cm deep.

The pitch vertically and horizontally between holes is 2.5 cm.

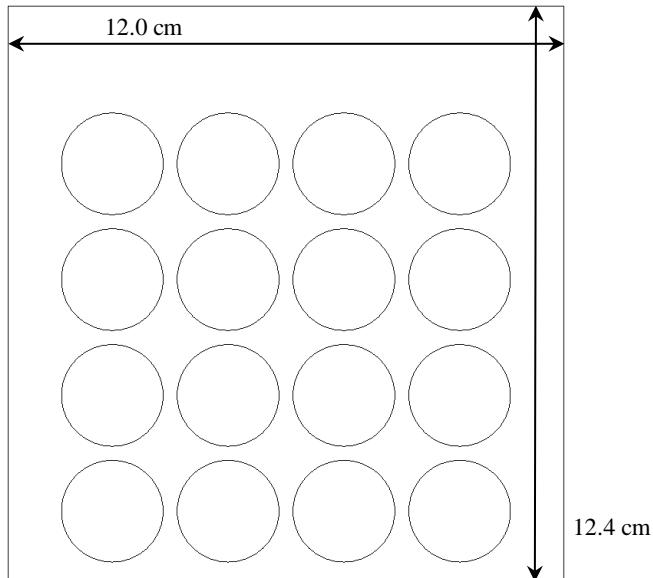


Fig. 3-18. YZ view of the foil holder model.

ALARM-TRAN-AIR-SHIELD-001

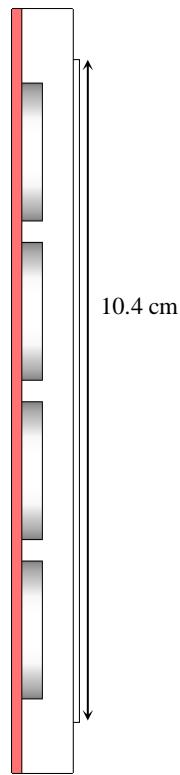


Fig. 3-19. XY view of the foil holder model.

3.2.5 Free Field Location – Nearly the entire geometry of the free field location has been simplified. All that remains after these simplifications are the neutron activation foils, the foil holder, and the TLD. The foil holder model has been described in Sect. 3.2.4, the foils in Sect. 3.2.9, and the TLD in Sect. 3.2.10. The location of everything associated with the free field location is also described in Sect. 3.2.9, specifically in Figs. 3-33 through 3-35. The axis of the cylindrical support of the free field stand (Fig. 1-34), if included in the benchmark model, would be on the 60° line (see Figs. 1-2, 1-53, 3-15, and 3-24), 270.4 cm from the axis of SILENE, at this (X, Y) position in the global coordinate system (-135.2, -234.17). In hindsight, it may be easier to build the entire free field stand, perform the needed rotation and translation, and then remove the unnecessary parts. This seems plausible because its location within the SILENE room is based on the central cylindrical support.

3.2.6 Scattering Box – The scattering box is constructed using 6 of the concrete shielding blocks described in Sect. 3.2.3. However, Sect. 3.2.3 is specifically describing the barite concrete shield block in front of collimator B, whereas the scattering box is built using 2 magnetite concrete shield blocks and 4 standard concrete shield blocks. The dimensions of all these shielding blocks are identical in the benchmark model, so the only difference is the material composition. Figure 3-20 below shows the scattering box benchmark model. The shield labels in Fig. 3-20 are consistent with those used in Fig. 1-45. Shield S1 and S2 are the magnetite concrete blocks, and shields S3 – S6 are the standard concrete blocks. Table 3-1 lists the gaps between all the shield blocks in the benchmark model. The gap sizes in Table 3-1 are averages of the gap measurements in Figs. 1-45 through 1-47.

ALARM-TRAN-AIR-SHIELD-001

All steel tubes in the scattering box are 10 cm × 5 cm and 0.5 cm thick

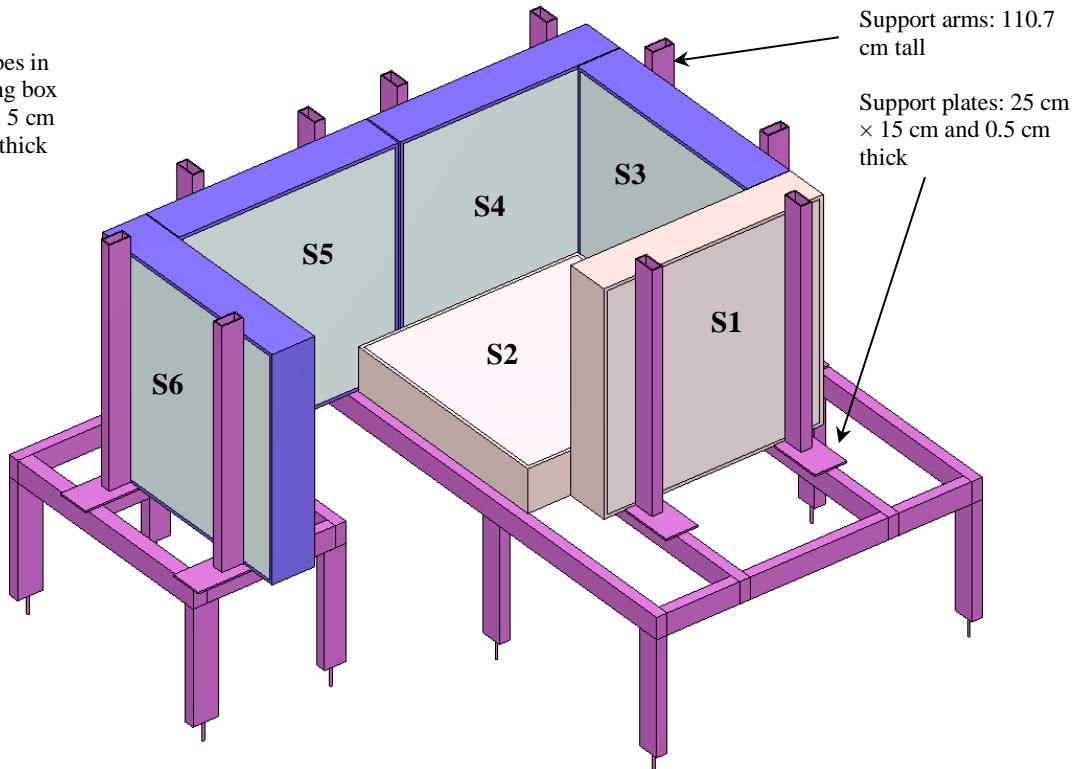


Fig. 3-20. Scattering box benchmark model overview.

Table 3-1. Scattering box benchmark model gaps

Shield block combination	Gap size (cm)
S1 – S2	0.25
S1 – S3	0.25
S2 – S3	0.0
S2 – S4	0.475
S2 – S5	0.475
S3 – S4	0.475
S4 – S5	0.8
S5 – S6	0.5

The scattering box sits atop a steel support stand. The dimensions of the scattering box support stand in the benchmark model are shown in Figs. 3-21 through 3-23. Finally, the location of the scattering box on the steel support stand and the location of the steel support stand within the SILENE room are shown in Fig. 3-24.

ALARM-TRAN-AIR-SHIELD-001

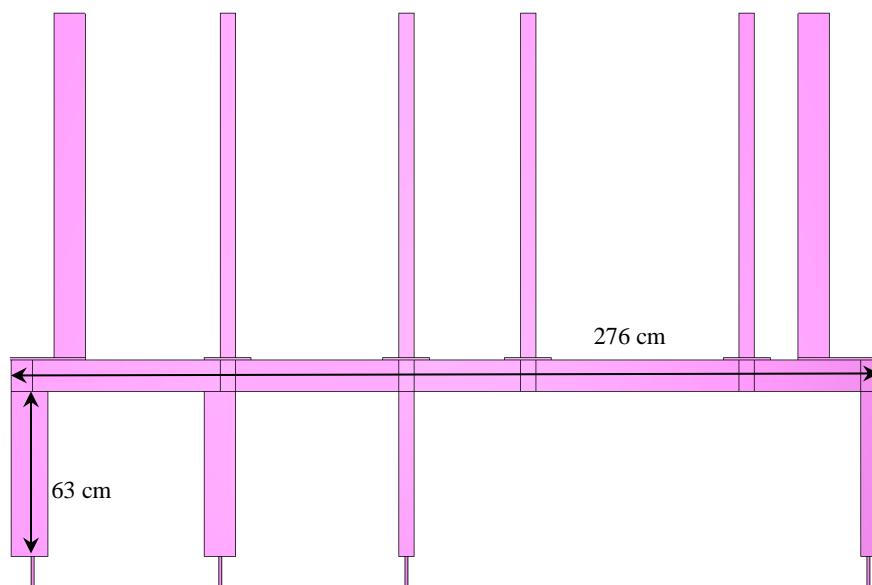


Fig. 3-21. XZ View of the scattering box support stand.

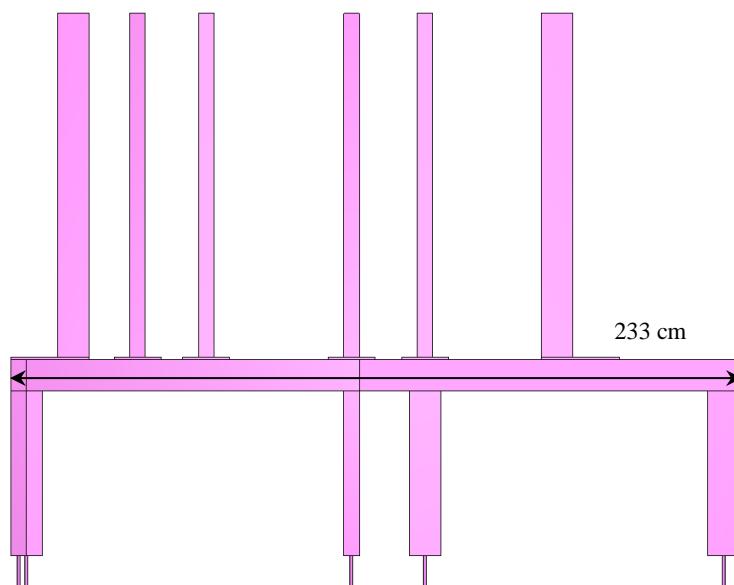


Fig. 3-22. YZ View of the scattering box support stand.

ALARM-TRAN-AIR-SHIELD-001

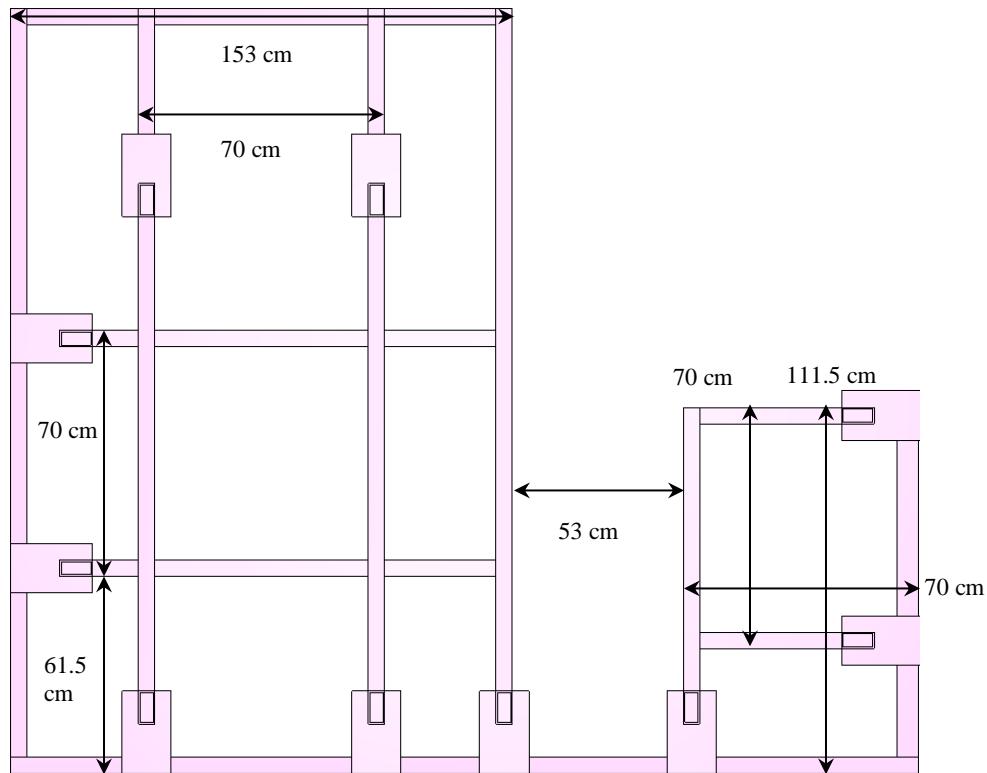


Fig. 3-23. XY View of the scattering box support stand.

ALARM-TRAN-AIR-SHIELD-001

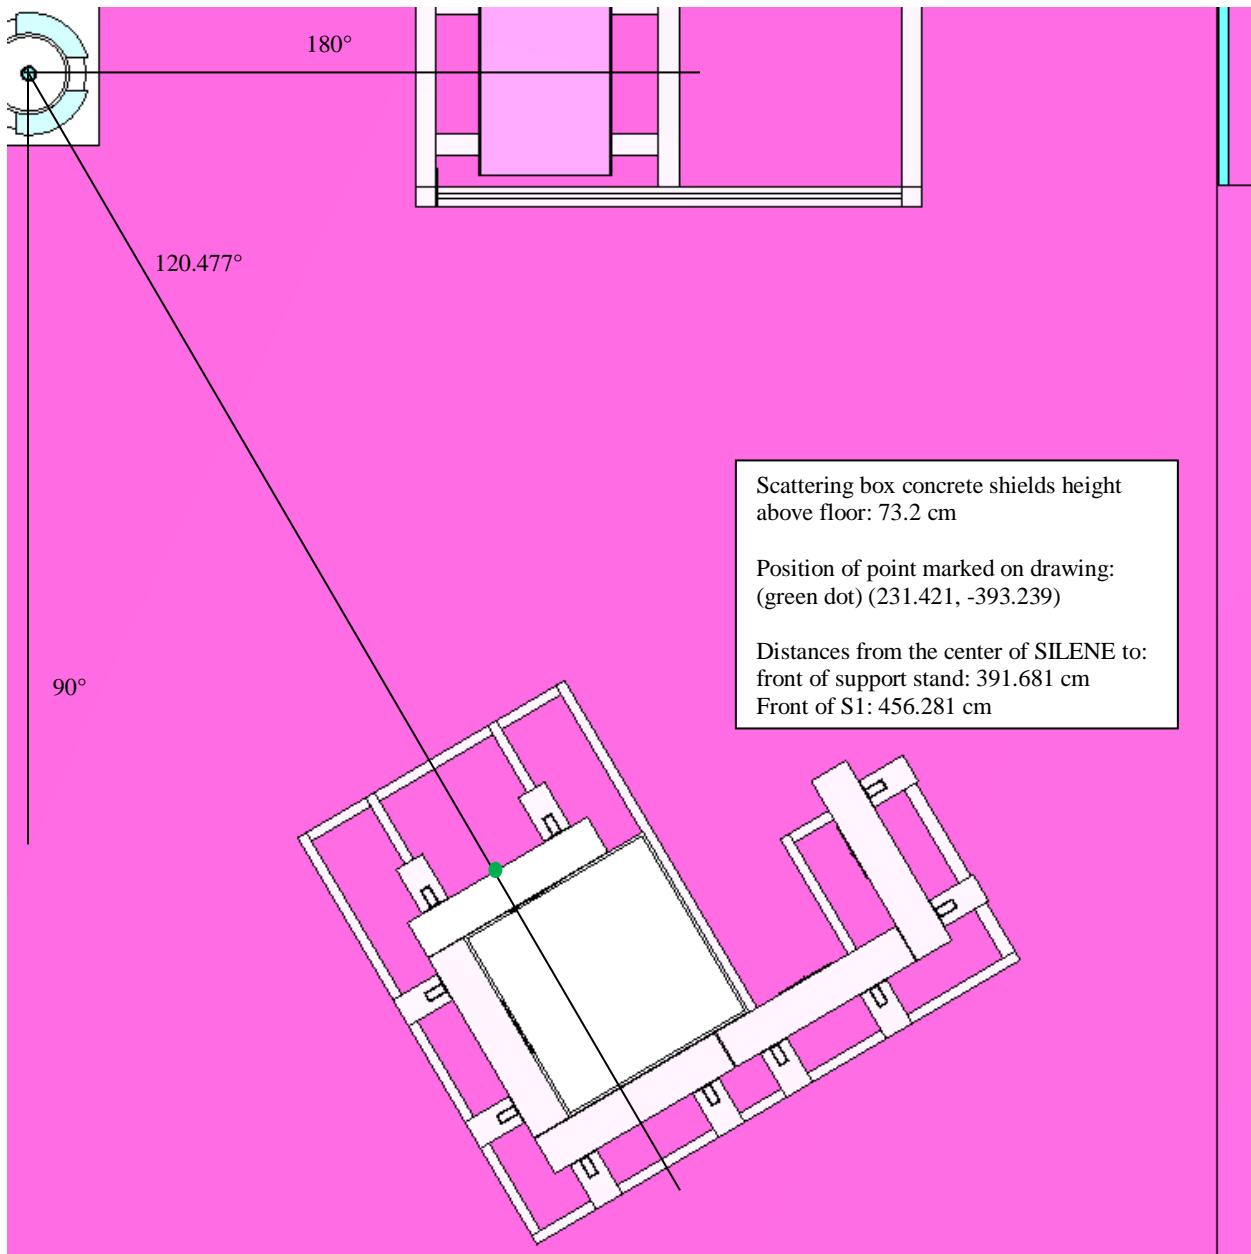


Fig. 3-24. Location of the scattering box on the support stand and the support stand within the SILENE room.

The angle of rotation and translation for the scattering box in Fig. 3-24 was determined using the measurements in Fig. 1-42. Several of these measurements provide different distances from the scattering box and its stand to the walls of the SILENE room. With these distances, dimensions of the scattering box and its stand, and trigonometry one can reproduce this rotation and translation.

ALARM-TRAN-AIR-SHIELD-001

3.2.7 Scattering Box Detector Mounting Plate – The neutron activation foils and TLDs in the scattering box were mounted using two aluminum plates at each position. In the benchmark model, these aluminum plates are identical. The thickness of these plates is 0.1 cm, and the other dimensions can be seen in Fig. 3-25. Figure 3-26 shows how these plates are put together to form the mount for each scattering box position. Note that the angle shown in Fig. 1-49 has been ignored to simplify the model.

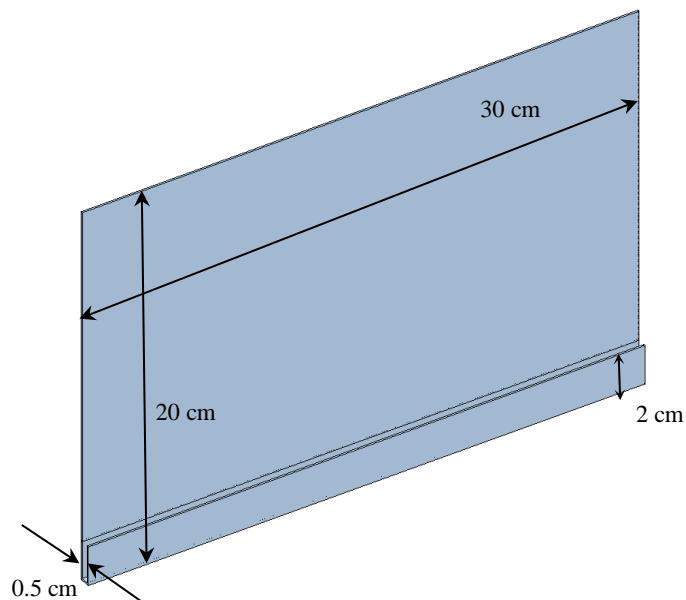


Fig. 3-25. Dimensions of the scattering box mounting plates.

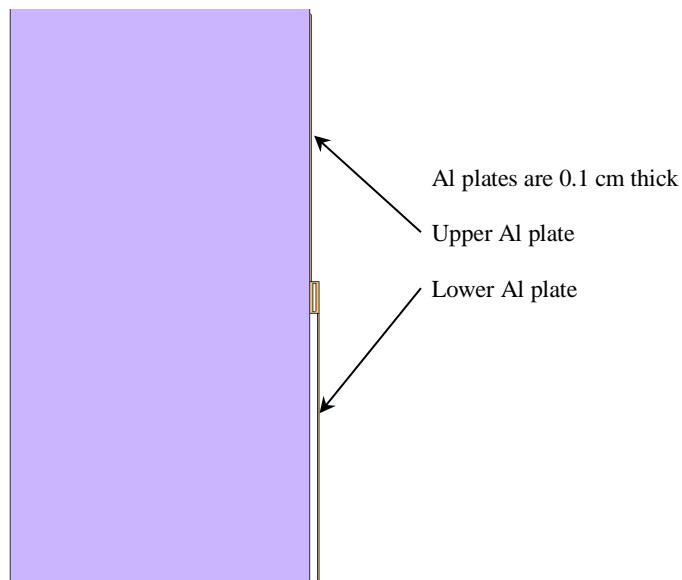


Fig. 3-26. Configuration of the scattering box mount.

ALARM-TRAN-AIR-SHIELD-001

3.2.8 SILENE Critical Assembly – The dimensions of the benchmark model of SILENE are shown in Fig. 3-27. The SILENE benchmark model matches the description in Sect. 1.4.1 exactly, but that description itself is a simplification.

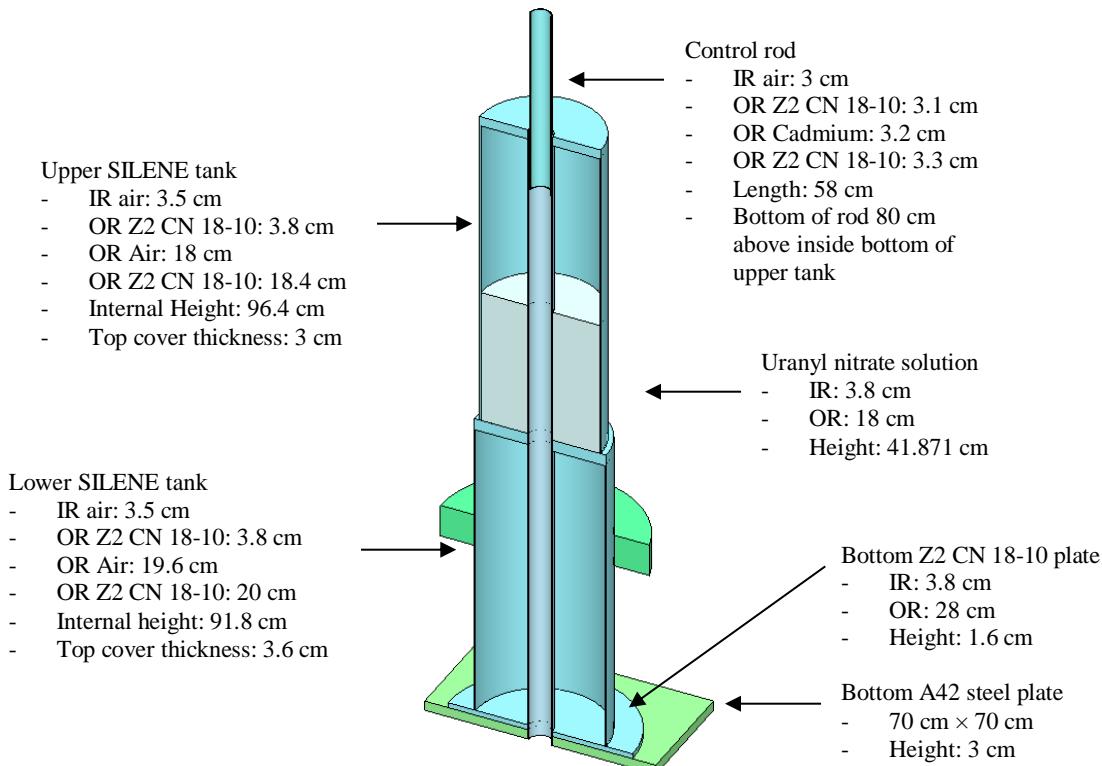


Fig. 3-27. SILENE assembly benchmark model dimensions.

3.2.9 Neutron Activation Foils – An example of the benchmark model of the neutron activation foils is shown in Fig. 3-28. All the neutron activation foils in the benchmark model have the same diameter (2 cm). Table 3-2 gives the benchmark model thickness, t , for each activation foil. As stated previously, the Ti foil was not intended to produce any data for this benchmark, but is included in the model for completeness.

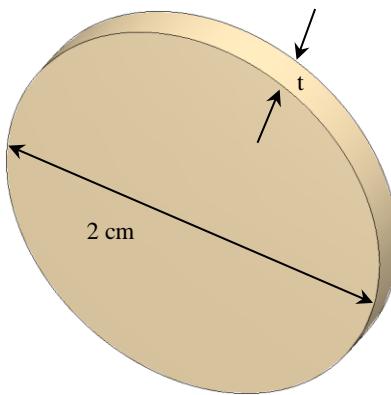


Fig. 3-28. Example of a benchmark model neutron activation foil.

ALARM-TRAN-AIR-SHIELD-001

Table 3-2. Thickness of each benchmark model neutron activation foil

Location	Reference name	Thickness (mm)
Case 1 collimator A	Au05-A10	0.25
	Ni011	2
	In005	1
	Fe021	3
	Mg032	2
	Co013	2
	Ti	2
Case 2 collimator B	Au08-A10	0.25
	Ni029	2
	In006	1
	Fe029	3
	Mg030	2
	Co019	2
	Ti	2
Case 3 free field	Au09-A10	0.25
	Ni016	1
	In008	1
	Fe028	3
	Mg029	2
	Co016	2
	Ti	2
Case 4 scattering box 1	Au001	0.25
	Ni018	2
	In09-A10	1
	Fe020	3
	Mg006	2
	Co023	2
	Ti	2
Case 5 scattering box 2	Au07-A10	0.25
	Ni013	2
	Co026	2
Case 6 scattering box 3	Au10-A10	0.25
	Ni015	2
	Co022	2
Case 7 scattering box 4	Au03-A10	0.25
	Ni024	2
	Co009	2

The neutron activation foils in the collimators and at the free field location were mounted in a foil holder. The center of each benchmark model neutron activation foil that is inside one of the foil holders is placed at the exact center of the holes in the foil holder. Figures 3-29 and 3-30 illustrate this positioning within the foil holder. Note that the layout of foils in Fig. 3-29 is used for all neutron activation foil locations, including the scattering box. Therefore, when a subset of foils is used in the scattering box, the foils present are in this same configuration. This matches Figs. 1-70, 1-72, and 1-74.

ALARM-TRAN-AIR-SHIELD-001

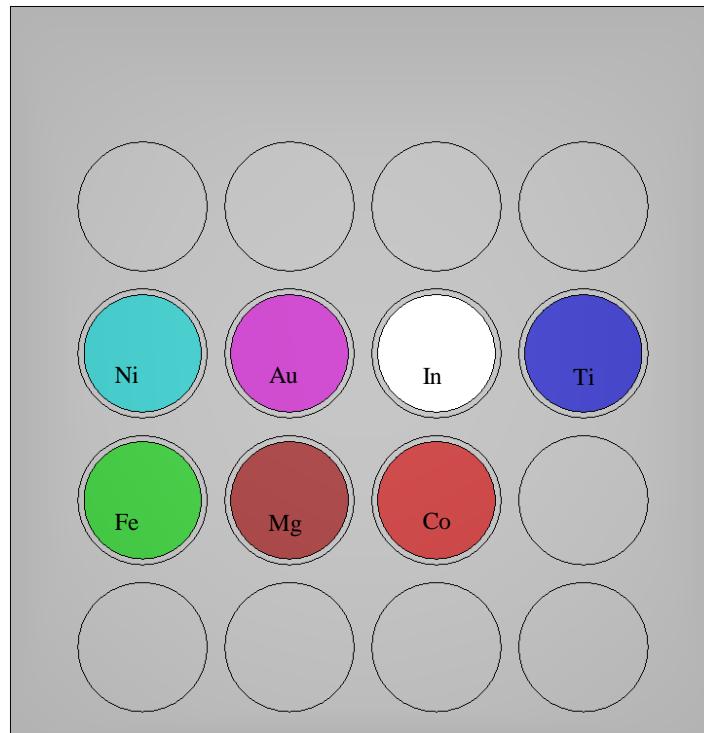


Fig. 3-29. YZ view of neutron activation foils within the foil holders.

ALARM-TRAN-AIR-SHIELD-001

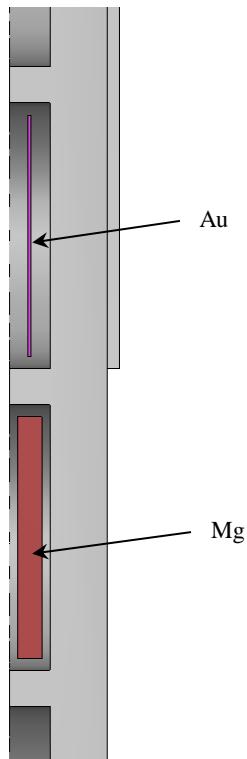


Fig. 3-30. XZ view of the neutron activation foils within the foil holders.

The location of the foil holders and Al_2O_3 TLD within collimators A and B are identical as shown in Figs. 3-31 and 3-32. The foil holder and Al_2O_3 TLD at the free field location are shown in Figs. 3-33 and 3-34. For the free field location, part of the support stand has been included in Figs. 3-33 and 3-34 to provide a frame of reference to locate the foil holder. Recall that the free field support stand has been excluded from the benchmark model to simplify the geometry (see Sect. 3.2.5). The axis of the cylindrical support of the free field stand (Fig 1-34), if included in the benchmark model, would be on the 60° line (see Figs. 1-2, 1-53, 3-15, and 3-24), 270.4 cm from the axis of SILENE, at this (X, Y) position in the global coordinate system (-135.2, -234.17). The distance along this 60° line from the axis of the free field stand to the front of the foil holder, the 8 mm thick portion with holes and excluding the 1.5 mm thick cover, is 3.95 cm (see Figs. 1-28 through 1-35). The distance from the 60° line in the perpendicular direction to the center of the foil holder is 15.05 cm. The position is illustrated in Fig. 3-35. Finally, note that the foil configuration and location within the foil holders in Figs. 3-31 through 3-34 is given in Figs. 3-29 and 3-30.

ALARM-TRAN-AIR-SHIELD-001

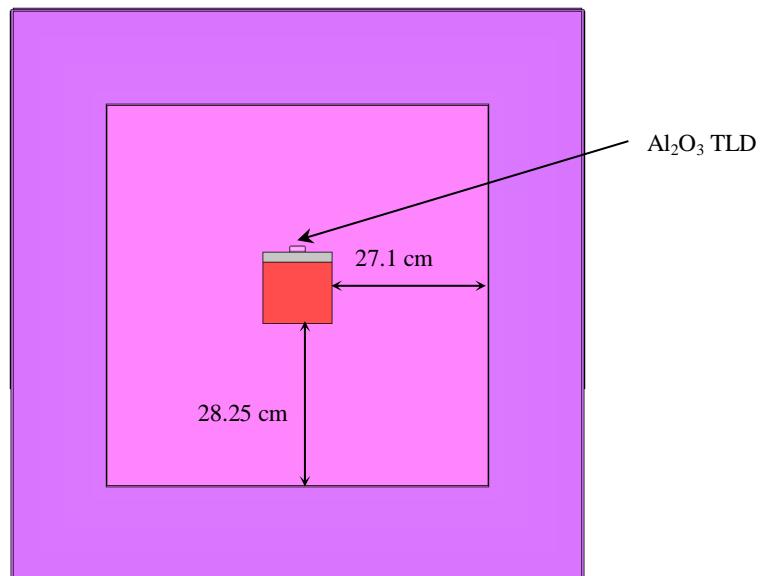


Fig. 3-31. Elevation view of the foil holder within the collimators.

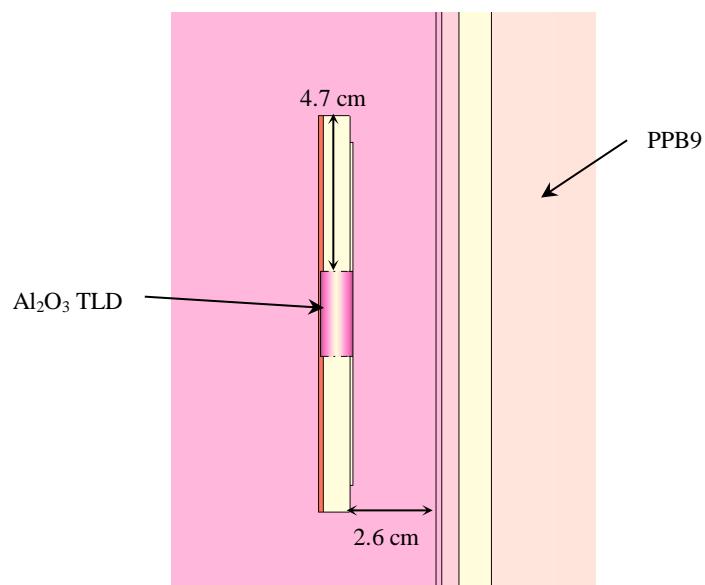


Fig. 3-32. Plan view of the foil holder within the collimators.

ALARM-TRAN-AIR-SHIELD-001



Fig. 3-33. Elevation view of the foil holder at the free field location.


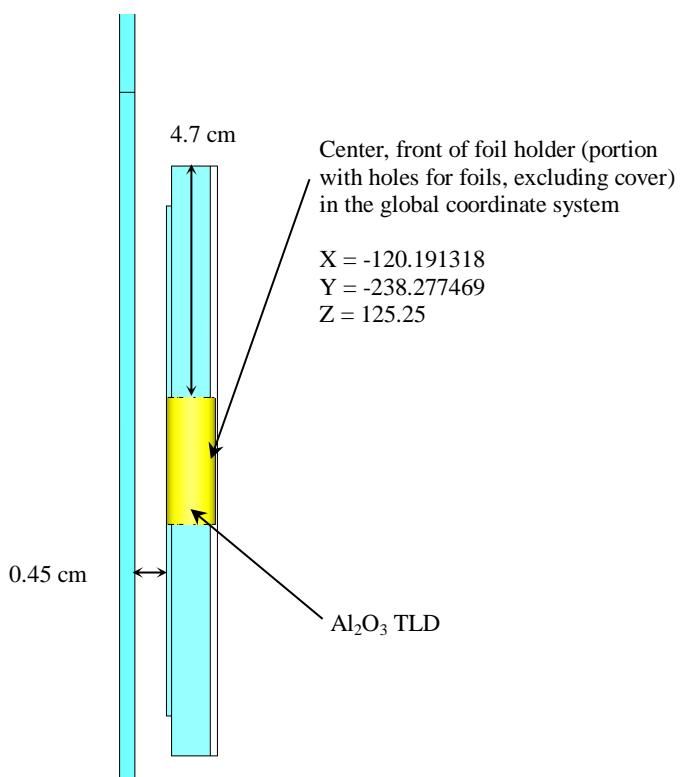


Fig. 3-34. Plan view of the foil holder at the free field location.

ALARM-TRAN-AIR-SHIELD-001

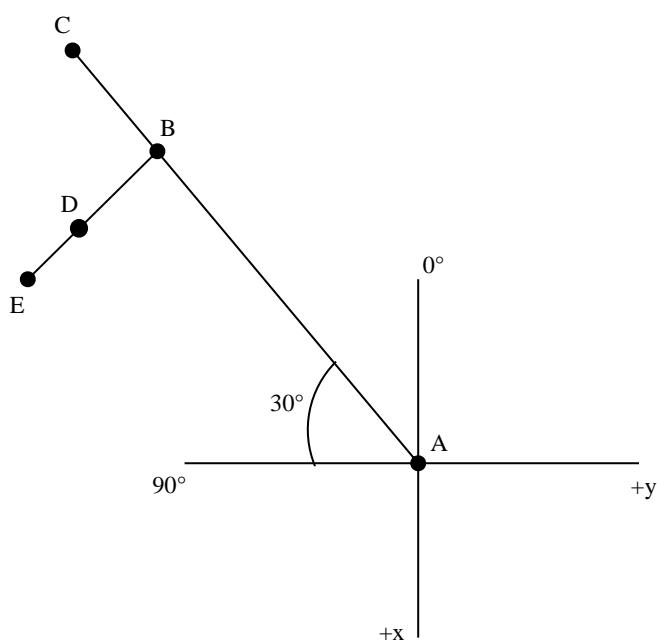

- A: Axis of SILENE (0,0)
- B: Front of foil holder, without cover, along 60° line (-133.225, -230.75)
- C: Axis of free field stand (-135.2, -234.17)
- D: Center, front of foil holder, Fig. 3-34, (-120.19, -238.28)
- E: End of bar supporting foil holder

Distances between points:

$$\begin{aligned} AC &= 270.4 \text{ cm} \\ BC &= 3.95 \text{ cm} \\ BD &= 15.05 \text{ cm} \\ BE &= 30 \text{ cm} \end{aligned}$$

Trigonometry to calculate coordinates of Point D

$$\begin{aligned} D_x &= [-(AC - BC) \sin 30^\circ] \\ &\quad + [BD \cos 30^\circ] \\ D_x &= [-(AC - BC) \cos 30^\circ] \\ &\quad - [BD \sin 30^\circ] \end{aligned}$$

Fig. 3-35. Sketch to help locate the free field location (not to scale).

The neutron activation foils and Al_2O_3 TLDs in the scattering box were mounted on the aluminum plates described in Sect. 3.2.7. Figures 3-36 through 3-39 show the location of the neutron activation foils and Al_2O_3 TLDs on these aluminum plates and the location of the aluminum plates on the shielding blocks of the scattering box. The dotted centerlines in Figs. 3-36 through 3-39 mark the center of the aluminum plates from left to right and the center of the lower aluminum plate from top to bottom. Though not drawn perfectly to scale, these centerlines lie exactly on the half-pitch location of the foils on either side of this line. In other words, the centerlines lie exactly between the adjacent foils. The vertical and horizontal pitch of the foils in the scattering box is 2.5 cm, like the foils in the foil holder. The bottoms of the Al_2O_3 TLDs in these figures are 15 cm above the bottom of the lower aluminum plate, which is consistent with Figs. 1-70, 1-72, and 1-74. The vertical axis of the TLDs is collinear with the vertical centerlines drawn in the figures. Finally, remember that the foil configuration at each scattering box position (Figs 3-36 through 3-39) is identical to the configuration within the foil holders given in Fig. 3-29, including the pitch between the foils. Also, in the benchmark model, the cylindrical base of each foil contacts the aluminum mounting plate, which may not have been the case in the experiment because of the plastic bags.

ALARM-TRAN-AIR-SHIELD-001

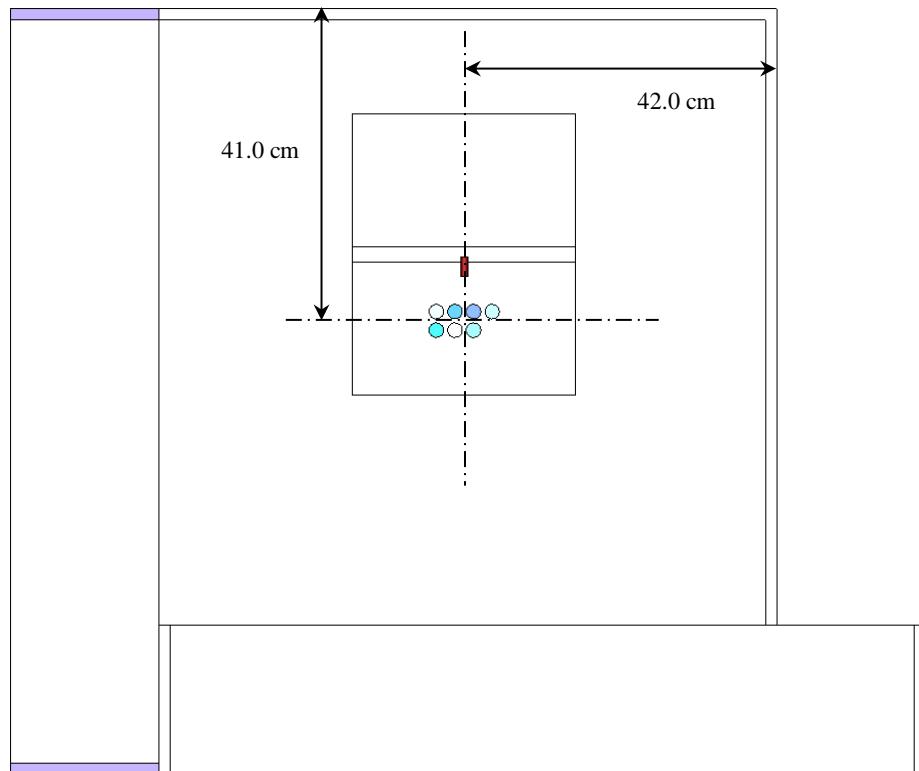


Fig. 3-36. Scattering box position 1 (SB1) detector configuration.

ALARM-TRAN-AIR-SHIELD-001

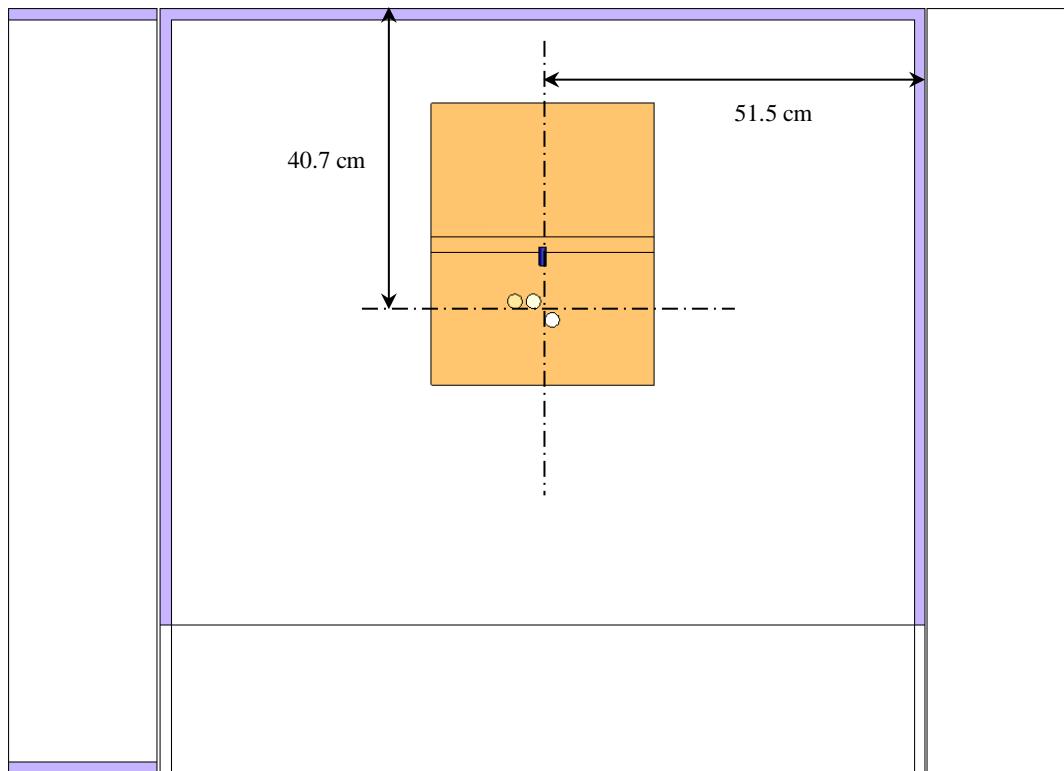


Fig. 3-37. Scattering box position 2 (SB2) detector configuration.

ALARM-TRAN-AIR-SHIELD-001

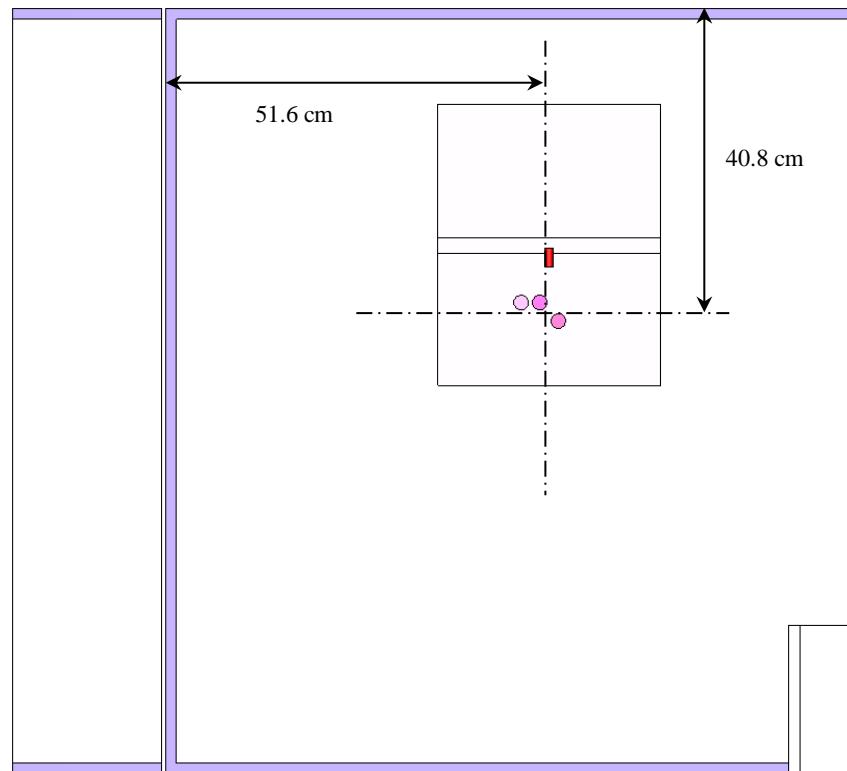


Fig. 3-38. Scattering box position 3 (SB3) detector configuration.

ALARM-TRAN-AIR-SHIELD-001

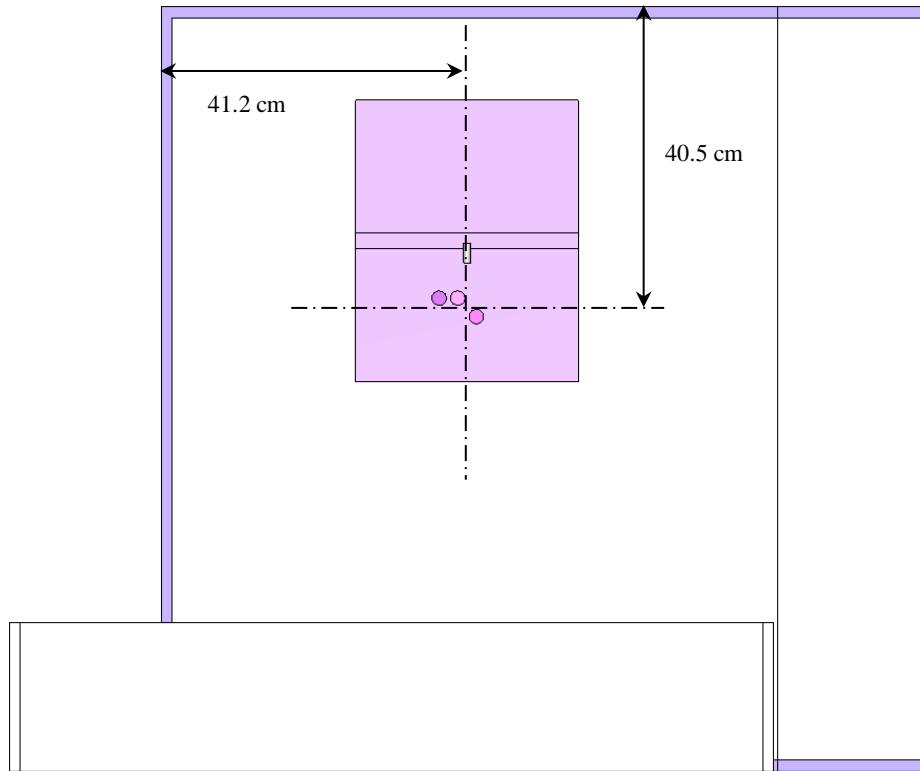


Fig. 3-39. Scattering box position 4 (SB4) detector configuration.

3.2.10 TLD – The Al_2O_3 TLD provided by CEA Valduc is included in the benchmark model. The geometry is shown in Fig. 3-40. The location of each of these TLDs has already been provided in Figs. 3-31 through 3-39.

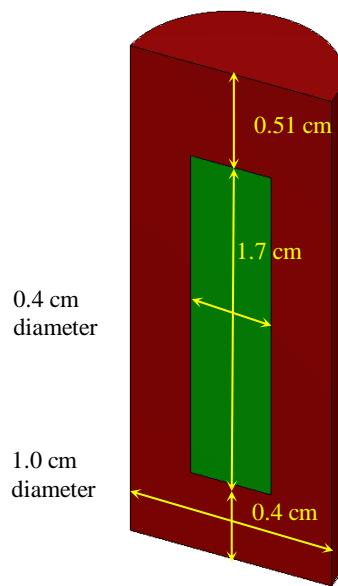


Fig. 3-40. Al_2O_3 TLD benchmark model.

ALARM-TRAN-AIR-SHIELD-001

3.3 Material Data

Section 3.2 provided dimensions for the benchmark model. The following subsections provide benchmark model number densities for the materials described in Sects. 1.3, 1.4, and 1.5. Elemental and isotopic compositions are presented in Sect. 1.0 as weight percentages or atom percentages. The atom or weight percentage used in the number density calculations depends on how the numbers were presented in Sect. 1.0.

- If an exact percentage is listed in Sect. 1.0, then that percentage is used.
- Impurities, usually from a chemical analysis, that are below the minimum detectable limit are presented as < W. The percentage used is W/2. This was applied to the barite concrete, magnetite concrete, standard concrete, lower lead ring, and neutron activation foil compositions. However, benchmark simplifications have removed the impurities from the lower lead ring and neutron activation foil benchmark compositions.
- If a percentage range is provided, usually from a material standard, the middle of that range is used.
- Any standard material that lists a maximum amount of a constituent is presented as \leq W. The percentage used is 2W/3. This was applied to S235JR, Z2 CN 18-10 (but not the Z2 CN 18-10 in the collimator boxes), A42, and AU4G.
- Material standards often report the major constituent as *balance*. The percentage used is the value needed to make the sum of constituents equal to 100%.
- In this report, there are a few chemical analyses with unreported constituents that obviously must be present. These are handled in the same manner as anything reported as balance for a material standard.

There are a few exceptions to the methods listed above, and those will be explained explicitly in the following subsections. The tables in the following subsections provide elemental number densities in units of atoms per barn centimeter.

3.3.1 SILENE Room – The benchmark model number densities of SILENE concrete, the air in the SILENE room, and the low carbon steel used throughout the benchmark model, S235JR, are given in Table 3-3 through Table 3-5.

Table 3-3. SILENE concrete benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
H	1.0350E-02	Si	1.4170E-02
B-10	1.6020E-06	Ca	6.4240E-03
O	4.3470E-02	Fe	7.6210E-04
Al	1.5630E-03		

Table 3-4. SILENE air benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
H	5.7764E-07	O	1.0071E-05
C	6.9710E-09	Ar	2.1681E-07
N	3.6409E-05		

ALARM-TRAN-AIR-SHIELD-001

Table 3-5. Steel S235JR (low carbon steel) benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
C	4.4608E-04	Mn	8.0313E-04
N	2.7001E-05	Fe	8.3409E-02
P	3.5612E-05	Cu	2.7277E-04
S	3.4400E-05		

3.3.2 Collimator Boxes – The materials in the collimators, starting from the inside and working out, are stainless steel, copper, lead, PPB9, and stainless steel. The benchmark model number densities for these materials are given in Tables 3-6 through 3-9. The stainless steel on the inside and outside of the collimator has the same composition, Z2 CN 18-10. The number densities in Table 3-6 are based on the chemical analysis provided when the collimator boxes were constructed (Table 1-3). The “other” PPB9 material reported in Table 1-4 is treated as a void in Table 3-9. The collimator box and shielding support stands are made of steel S235JR, whose composition is given in Table 3-5.

Table 3-6. Collimator box Z2 CN 18-10 stainless steel benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
C	7.8059E-05	Cr	1.6498E-02
N	1.6399E-04	Mn	1.3908E-03
Si	6.6763E-04	Fe	5.9991E-02
P	4.6917E-05	Ni	6.4693E-03
S	2.9239E-06		

Table 3-7. Collimator box copper benchmark model number densities

Element	Number density (atom/b*cm)
Cu	8.4533E-02

Table 3-8. Collimator box lead benchmark model number densities

Element	Number density (atom/b*cm)
Pb	3.2968E-02

Table 3-9. Collimator box PPB9 benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
H	4.9729E-02	Si	7.7056E-05
B	6.4833E-04	S	1.5437E-03
C	2.1133E-02	K	1.2216E-06
O	1.1304E-02	Ca	1.7721E-03
Mg	6.4618E-05	Sr	1.1171E-05
Al	5.1082E-05		

ALARM-TRAN-AIR-SHIELD-001

3.3.3 Collimator B Shielding – The shielding in front of collimator B is made of barite concrete. The benchmark model number densities for barite concrete are given in Table 3-10. As explained previously, the boron below the detectable limit of the barite concrete chemical analysis has been ignored. The “unreported” barium and sulfur form the major constituents of the barite (BaSO_4) aggregate in this concrete. In order to fill in these missing constituents that must be present, it has been assumed that BaSO_4 makes up 54 weight percent of the concrete. See Sect. 1.3.3 for additional details. The frame of the barite concrete shield block is made of steel S235JR, whose benchmark model number densities are given in Table 3-5.

Table 3-10. Barite concrete benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
H	7.7680E-03	Cl	2.7603E-06
C	4.8886E-04	K	1.2515E-04
O	5.2619E-02	Ca	3.2475E-03
Na	3.4053E-05	Ti	1.6355E-05
Mg	1.0468E-04	Cr	3.7641E-06
Al	5.1502E-04	Mn	2.4938E-05
Si	5.0453E-03	Fe	3.7851E-04
P	2.5276E-05	Sr	1.8764E-04
S	4.5285E-03	Ba	4.5284E-03

3.3.4 Simplified Foil Holder – The foil holder benchmark model consists of a single material, AG3M aluminum alloy, whose benchmark model number densities are provided in Table 3-11.

Table 3-11. AG3M aluminum alloy benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
Mg	2.0623E-03	Mn	9.8107E-05
Al	5.7251E-02	Fe	7.7211E-05
Si	1.5353E-04	Cu	1.6964E-05
Ti	3.3780E-05	Zn	3.2975E-05
Cr	6.2195E-05		

3.3.5 Free Field Location – The free field location has been simplified to just a foil holder, neutron activation foils, and TLD. The benchmark number densities for these materials can be found in Sects. 3.3.4, 3.3.9, and 3.3.10, respectively.

3.3.6 Scattering Box – The scattering box is made of two magnetite concrete shield blocks and 4 standard concrete shield blocks. The benchmark model number densities for each of these materials are provided in Tables 3-12 and 3-13, respectively. Like the barite concrete shield block, the boron under the detectable limit of the chemical analysis has been ignored. The concrete frames are made of steel S235JR, as is the support stand (Table 3-5).

ALARM-TRAN-AIR-SHIELD-001

Table 3-12. Magnetite concrete benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
H	7.4572E-03	Cl	3.3123E-06
C	7.0396E-04	K	1.6820E-04
O	4.9095E-02	Ca	3.3930E-03
Na	2.2475E-04	Ti	8.3412E-05
Mg	5.4114E-04	Cr	1.3551E-05
Al	4.5264E-04	Mn	7.6951E-05
Si	2.2746E-03	Fe	2.3106E-02
P	3.4122E-04	Sr	5.3612E-06

Table 3-13. Standard concrete benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
H	8.7957E-03	Cl	1.9534E-06
C	7.1499E-04	K	1.1761E-03
O	4.2402E-02	Ca	2.9963E-03
Na	9.4590E-04	Ti	6.6554E-05
Mg	4.2741E-04	Cr	2.6638E-06
Al	3.1006E-03	Mn	1.0085E-05
Si	1.3325E-02	Fe	4.9357E-04
P	4.4718E-05	Sr	4.7426E-06

3.3.7 Scattering Box Detector Mounting Plate – The benchmark number densities of these plates are given in Table 3-14.

Table 3-14. Aluminum benchmark model number densities

Element	Number density (atom/b*cm)
Al	6.0307E-02

3.3.8 SILENE Critical Assembly – The primary structural material of the SILENE critical assembly is Z2 CN 18-10 stainless steel. The control rod contains a core of natural cadmium, and a support plate sits on the concrete floor that is A42 steel. The benchmark model number densities of these materials are given in Tables 3-15 through 3-17. The number densities in Table 3-15 are based on the standard composition of Z2 CN 18-10 (Table 1-9). The benchmark number densities of the lower lead ring attached to SILENE are given in Table 3-18. The number densities in Table 3-18 are based on an average of the two samples given in Table 1-11.

Table 3-15. Standard composition Z2 CN 18-10 benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
C	7.9221E-05	Cr	1.6469E-02
Si	1.1293E-03	Mn	1.1546E-03
P	4.0960E-05	Fe	5.9577E-02
S	2.9674E-05	Ni	8.1057E-03

Table 3-16. Natural cadmium benchmark model number densities

Element	Number density (atom/b*cm)
Cd	4.6340E-02

ALARM-TRAN-AIR-SHIELD-001

Table 3-17. A42 steel benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
C	6.5600E-04	S	6.0938E-05
N	2.0251E-05	Fe	8.4435E-02
P	6.3085E-05		

Table 3-18. Lower lead ring benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
Al	1.9980E-08	Cu	4.0828E-07
Cr	2.1060E-09	Ag	9.3708E-07
Fe	3.4391E-08	Sb	5.8112E-09
Ni	8.6684E-08	Pb	3.2520E-02

In order to calculate the benchmark number densities of the uranyl nitrate fuel solution, the SCALE 6.2 material input processor was used. The properties in Tables 1-12 and 1-13 were provided to SCALE 6.2 as a solution composition, and SCALE calculated the number densities. However, all of the data in Table 1-13 actually over-describe the solution input for SCALE. Therefore, in the SCALE input the acid molarity was left as a free parameter to be calculated by the code, which resulted in a solution in equilibrium. The resulting molarity calculated by SCALE is within the uncertainty band of the data provided in Table 1-13. The benchmark number densities of the uranyl nitrate fuel solution are provided in Table 3-19.

Table 3-19. Uranyl nitrate benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
H	6.2393E-02	²³⁵ U	1.6766E-04
N	1.5410E-03	²³⁶ U	4.5567E-07
O	3.5592E-02	²³⁸ U	1.1710E-05
²³⁴ U	1.0656E-06		

3.3.9 Neutron Activation Foils – The exact composition of the neutron activation foils are defined by the mass, dimensions, and analysis labels in Table 1-14 and the chemical analysis reports in Table 1-15 through Table 1-23. The one exception to this is the titanium foil. Since no activation products were reported for the titanium foil, these foils were assumed to be natural titanium at theoretical density. Table 3-20 through Table 3-26 list the benchmark number densities for all the neutron activation foils. It was found that the impurities have a negligible effect on the benchmark model. Therefore, the impurities have been excluded from the benchmark model, but the major foil constituents have number densities as if the impurities have been included. The one exception to this is the Mn in the Fe foil because ⁵⁵Mn(n, γ) and ⁵⁶Fe(n,p) produce the same activation product, ⁵⁶Mn.

Table 3-20. Collimator A neutron activation foil benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
In	3.8852E-02	Mg	4.2991E-02
Mn	2.6270E-04	Ti	5.6615E-02
Fe	8.3020E-02	Au	6.0221E-02
Ni	9.4546E-02	Co	9.4495E-02

ALARM-TRAN-AIR-SHIELD-001

Table 3-21. Collimator B neutron activation foil benchmark model number densities

Element	Number density (Atom/b*cm)	Element	Number density (Atom/b*cm)
In	3.8935E-02	Mg	4.2714E-02
Mn	2.6299E-04	Ti	5.6615E-02
Fe	8.3111E-02	Au	5.9832E-02
Ni	9.3912E-02	Co	9.4544E-02

Table 3-22. Free field neutron activation foil benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
In	3.8968E-03	Mg	4.2912E-02
Mn	2.6292E-04	Ti	5.6615E-02
Fe	8.3089E-02	Au	6.0065E-02
Ni	9.1396E-02	Co	9.4495E-02

Table 3-23. Scattering box 1 neutron activation foil benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
In	4.0869E-02	Mg	4.2637E-02
Mn	2.6245E-04	Ti	5.6615E-02
Fe	8.2941E-02	Au	6.1663E-02
Ni	9.3668E-02	Co	9.4397E-02

Table 3-24. Scattering box 2 neutron activation foil benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
Ni	9.4221E-02	Au	6.0143E-02
		Co	9.4446E-02

Table 3-25. Scattering box 3 neutron activation foil benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
Ni	9.4433E-02	Au	6.0610E-02
		Co	9.4511E-02

Table 3-26. Scattering box 4 neutron activation foil benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
Ni	9.4092E-02	Au	6.0649E-02
		Co	9.4137E-02

3.3.10 TLD – The Valduc TLD consists of the AU4G aluminum alloy holder filled with the Al₂O₃ TLD powder. The benchmark number densities for these are given in Tables 3-27 and 3-28, respectively. In Table 1-24, the weight percentage of titanium plus zirconium is reported as ≤ 0.2 . Therefore, the weight percentage for each of these elements was assumed to be 0.2/3, for a total of 0.4/3 ([2/3]*0.2).

ALARM-TRAN-AIR-SHIELD-001

Table 3-27. AU4G aluminum alloy benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
Mg	4.8564E-04	Mn	1.6881E-04
Al	5.8703E-02	Fe	1.0065E-04
Si	3.3021E-04	Cu	9.5526E-04
Ti	2.3485E-05	Zn	3.4388E-05
Cr	2.1620E-05	Zr	1.2323E-05

Table 3-28. Al₂O₃ TLD powder benchmark model number densities

Element	Number density (atom/b*cm)	Element	Number density (atom/b*cm)
O	3.5836E-02	Al	2.3891E-02

3.4 Source Strength and Spectra

The exact source strength and source spectra of this benchmark were not measured by the experimentalist. Rather, the number of fissions that occurred was measured. The number of fission events measured during this benchmark experiment was 1.88e17. Therefore, the source strength of the benchmark model is 1.88e17 fissions $\times \bar{v}$ neutrons per fission.

3.4.1 Response Functions and Normalization - In order for the results of the benchmark model to match the measured activation (Bq/g) and TLD dose (Gy) results, proper response functions must be applied along with the correct normalization.

3.4.1.1 Neutron Activation Foil Response Functions and Normalization – Many sources of neutron activation foil response functions (activation cross sections) are available to simulate this benchmark experiment. Examples are cross sections based on ENDF/B-VII, JEFF 3.2,^a JENDL 4.0,^b or IRDF-2002 (International Reactor Dosimetry File).

The complete tally normalization per unit fluence, M_n [(Bq / g) / (n / cm²)], applied in the benchmark model for the neutron activation reactions is

$$M_n = \frac{N_{fission} \bar{v} N_i \sigma_i \lambda_a e^{-\lambda_a T}}{\rho} = \frac{1.88e17 * \bar{v} N_i \sigma_i \lambda_a e^{-\lambda_a * 149}}{\rho}$$

where $N_{fission}$ is the number of fission events, N_i is the target isotope number density (atom/b*cm), σ_i is the microscopic activation cross section of the target (b), λ_a is the activation product decay constant (1/sec = Bq), $e^{-\lambda_a T}$ accounts for decay events that occur between the start of the critical pulse and the time the dosimetrist assumed the critical pulse ended (T sec), and ρ is the density of the activation foil (g/cm³).

$N_{fission}$ has been specified in Sect. 3.4, and \bar{v} must be calculated. All benchmark model number densities are provided in the tables in Sect. 3.3. The activation cross sections are energy dependent and must be selected by the user. The decay constants are calculated using the activation product half-lives ($\lambda = \ln 2 / t_{1/2}$), which

^a A. Santamarina, D. Bernard, et. al., “The JEFF-3.1.1 Nuclear Data Library, JEFF Report 22,” Organisation for Economic Co-operation and Development / Nuclear Energy Agency, 2009.

^b K. Shibata, et. al., “JENDL-4.0: A New Library for Nuclear Science and Engineering,” J. Nucl. Sci. Technol. Vol. 48(1), p. 1, 2011.

ALARM-TRAN-AIR-SHIELD-001

must also be selected by the user. The time between the beginning of the critical pulse and the point when the dosimetrist reported the measured activities, T in the above equation, is 149 sec, which is derived from data in Sect. 1.7. Finally, ρ is derived from data in Table 1-14. Calculating the neutron fluence and multiplying that by the normalization factor M_n provides computational results in units of Bq/g.

3.4.1.2 Photon TLD Dose Response Functions and Normalization – The ORNL and Valduc absorbed dose TLD calibrations were both for kerma in air. However, the Valduc TLD air kerma calibration was for ^{60}Co while ORNL's calibration was for ^{137}Cs . Example air kerma response functions are the Henderson conversion factors^a and the air kerma factors in ICRU-44^b and ICRU-57.^c

The complete tally normalization, M_p applied in the benchmark model for the TLD dose is

$$M_p = \frac{N_{fission} \bar{\nu}}{F} = \frac{1.88e17 * \bar{\nu}}{F}$$

where the parameter F is equal to 1 or 3600, which depends on whether or not the photon dose response function is on a per unit flux or fluence basis. If the photon response function has units per fluence (e.g., Gy / [photons / cm²]), then F will equal 1.0. However, if the response function has units per flux (e.g., [Gy / hr] / [photons / cm² × sec]), then F will equal 3600. This factor of 3600 is the number of seconds in an hour and is necessary because the experiment is normalized to the total number of fissions and not a fission rate.

3.5 Experimental and Benchmark Model Neutron and Photon Data

The benchmark values to be calculated using the benchmark model are total activity in Bq/g, following the pulse without any additional decay daughter products, and absorbed dose in Gy. The geometry simplifications made while creating the benchmark model did not introduce any significant biases. The experimental data given in Tables 1-26 and 1-27 and their uncertainties given in Tables 2-14 through 2-20 are the benchmark values. Therefore, the activity and dose reported in Tables 3-29 and 3-30, respectively, are exactly the measured values in Tables 1-26 and 1-27. The uncertainties of the activity and dose are the experimental uncertainties due to the measurement uncertainties and various benchmark model parameters in Tables 2-14 through 2-20, which summarize all the details in Appendix I. The gold foil activity measured in collimator A was rejected by the evaluators (Sect. 2.1.1), and the magnesium foil activity measured at scattering box location 1 was rejected by the dosimetrist.

^a B. J. Henderson, *Conversion of neutron or gamma ray flux to absorbed dose rate*, XDC-59-8-179, Oak Ridge National Laboratory, 1959.

^b ICRU, *Tissue Substitutes in Radiation Dosimetry and Measurement*, Report 44, 1989.

^c ICRU, *Conversion Coefficients for use in Radiological Protection against External Radiation*, Report 57, 1998.

ALARM-TRAN-AIR-SHIELD-001

Table 3-29. Benchmark neutron activation foil data

Position	Reaction	Activity (Bq/g)	Absolute uncertainty	Relative uncertainty
Case 1 Collimator A	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	6.610×10^1	4.394E+00	0.0665
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	9.110×10^6	6.444E+05	0.0707
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	8.030×10^3	5.061E+02	0.0630
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	2.062×10^{-1}	1.322E-02	0.0641
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.310×10^3	1.484E+02	0.0643
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	6.110×10^1	3.905E+00	0.0639
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.436×10^1	9.023E-01	0.0628
Case 2 Collimator B	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.242×10^1	1.839E+00	0.0820
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.426×10^4	2.031E+03	0.0837
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	3.000×10^6	2.541E+05	0.0847
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	1.196×10^3	1.362E+02	0.1139
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	3.110×10^{-2}	3.776E-03	0.1214
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	7.790×10^2	6.087E+01	0.0781
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	1.000×10^1	1.337E+00	0.1337
Case 3 Free field	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	2.120×10^0	2.477E-01	0.1169
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	6.620×10^1	4.401E+00	0.0665
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	6.950×10^4	4.510E+03	0.0649
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	8.780×10^6	6.237E+05	0.0710
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	6.860×10^3	4.306E+02	0.0628
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.961×10^{-1}	1.260E-02	0.0642
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.403×10^3	1.526E+02	0.0635
Case 4 Scattering box 1	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	5.910×10^1	3.799E+00	0.0643
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.299×10^1	8.168E-01	0.0629
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.227×10^1	1.717E+00	0.0771
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.414×10^4	1.957E+03	0.0811
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	2.710×10^6	2.061E+05	0.0761
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	5.250×10^2	5.323E+01	0.1014
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.058×10^{-2}	1.284E-03	0.1213
Case 5 Scattering box 2	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	8.480×10^2	5.677E+01	0.0670
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	7.060×10^{-1}	8.094E-02	0.1146
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.559×10^1	1.821E+00	0.0712
Case 6 Scattering box 3	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.539×10^4	1.759E+03	0.0693
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	2.900×10^{-1}	3.570E-02	0.1231
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	4.404×10^1	3.062E+00	0.0695
Case 7 Scattering box 4	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.460×10^4	3.034E+03	0.0680
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.240×10^0	2.140E-01	0.0661
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	3.993×10^1	2.804E+00	0.0702
$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	3.870×10^4	2.652E+03	0.0685	
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.330×10^0	2.189E-01	0.0657

ALARM-TRAN-AIR-SHIELD-001

Table 3-30. Benchmark TLD dose data

Position	TLD Type	Dose (Gy)	Absolute uncertainty	Relative uncertainty
Case 1 Collimator A	Al ₂ O ₃	6.610×10 ⁰	5.186E-01	0.0785
Case 2 Collimator B	Al ₂ O ₃	8.200×10 ⁻¹	8.035E-02	0.0980
Case 3 Free field	Al ₂ O ₃	3.720×10 ⁰	2.929E-01	0.0787
Case 4 Scattering box 1	Al ₂ O ₃	5.800×10 ⁻¹	4.910E-02	0.0847
Case 5 Scattering box 2	Al ₂ O ₃	4.400×10 ⁻¹	3.598E-02	0.0818
Case 6 Scattering box 3	Al ₂ O ₃	1.760×10 ⁰	1.376E-01	0.0782
Case 7 Scattering box 4	Al ₂ O ₃	1.870×10 ⁰	1.696E-01	0.0907

ALARM-TRAN-AIR-SHIELD-001

4.0 RESULTS OF SAMPLE CALCULATIONS

This section presents the results of several sample calculations, starting with simulations of the source through to simulations of the detector responses. The codes used for these sample calculations include MCNP6, SCALE 6.2, COG 11.1, and TRIPOLI-4. It is important to point out that all of these simulations are static or steady state simulations. All of these simulations assume the materials are at room temperature, the fuel solution has a fixed volume / density, all fissions occur at exactly the same time ($t=0$ seconds), all activated nuclei are created at exactly the same time (also $t=0$ seconds), and the control rod is fully withdrawn before the excursion begins. None of the dynamic aspects of this critical excursion have been modeled, but some of them have been evaluated via the sensitivity and uncertainty analysis discussed in Sect. 2.0.

4.1 Source Strength and Spectra

The exact source strength and source spectra of this benchmark were not measured by the experimentalist. Rather, the number of fissions that occurred was measured. This leaves it to the benchmark evaluators to calculate the number of neutrons produced per fission, \bar{v} , the energy spectrum of the neutrons born from fission events, χ , and the spatial distribution of neutrons born from fission events. This can be done using two different methods:

- 1) An eigenvalue calculation can be performed that tallies the activity created in the neutron activation foils and the absorbed dose deposited in the TLDs. In this case \bar{v} , χ , and the spatial distribution of fission neutrons are being calculated internally by the radiation transport code. This method is referred to as the one-step method and is used to calculate all COG 11.1 results presented in this report and TRIPOLI-4 results for the absorbed dose deposited in the TLD.
- 2) Alternatively, an eigenvalue calculation can be performed that tallies \bar{v} , χ , and the spatial distribution of fission neutrons. Then the information in those tallies can be used to create a source in a second fixed-source simulation of the activity created in the neutron activation foils and the absorbed dose deposited in the TLDs. This method is referred to as the two-step method and is the method employed to calculate all MCNP6 and SCALE 6.2 results presented in this report and TRIPOLI-4 results for the activity of the neutron activation foils.

The following discussion of the fixed-source energy and spatial distributions are specific to the two-step method using MCNP6. Similar information was required to use the two-step method with the SCALE 6.2 simulations, but the details are slightly different. More information is provided in Appendix A.

The number of fission events measured during this benchmark experiment was $1.88e17$. Therefore, the source strength of the fixed-source MCNP model is $4.583e17$ neutrons ($1.88e17$ fissions $\times 2.438$ neutrons per fission). The system \bar{v} (2.438 neutrons per fission) was calculated with MCNP6 using ENDF/B-VII.1 room temperature cross sections. The calculated eigenvalue of the benchmark model, with the cadmium control rod fully removed, from this MCNP6 simulation was 1.02320 ± 0.00002 , so the assembly was more than 3 dollars above delayed critical.

The tally of the energy distribution of neutrons born from fission in the MCNP6 eigenvalue calculation was converted to a probability distribution and plotted in Fig. 4-1. The distribution of fission neutrons in the axial direction is plotted in Fig. 4-2. For each axial layer, a radial distribution of fission neutrons was created. There are 84 axial zones, each with its own radial distribution. Plotted in Fig. 4-3 are the radial distributions for axial zones 1 (bottom), 41 (middle), and 84 (top). Tables of the data plotted in Figs. 4-1 through 4-3 are

ALARM-TRAN-AIR-SHIELD-001

presented in Appendix C along with the tally uncertainties from the MCNP6 eigenvalue calculation. Appendix C also includes the tabular data for all the other radial distributions not plotted in Fig. 4-3.

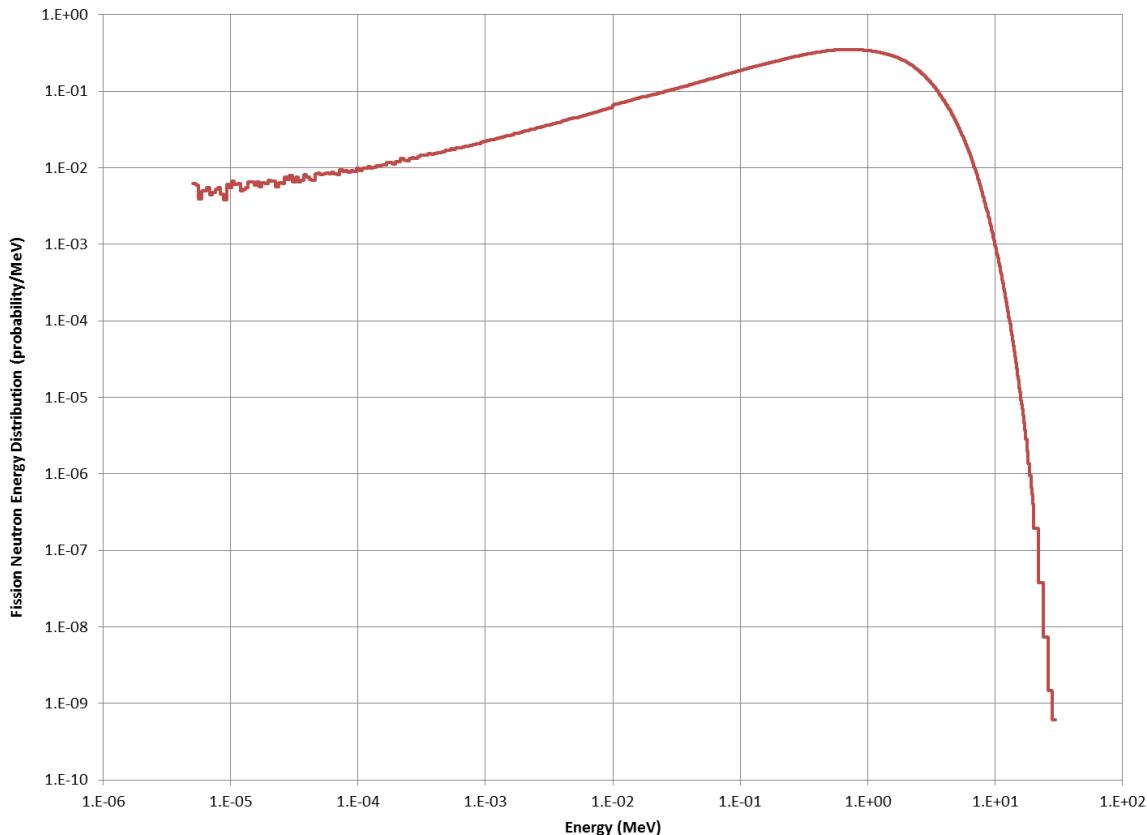


Fig. 4-1. SILENE pulse 1 energy distribution of fission neutrons calculated with MCNP6 using ENDF/B-VII.1 cross section data (.80c).

ALARM-TRAN-AIR-SHIELD-001

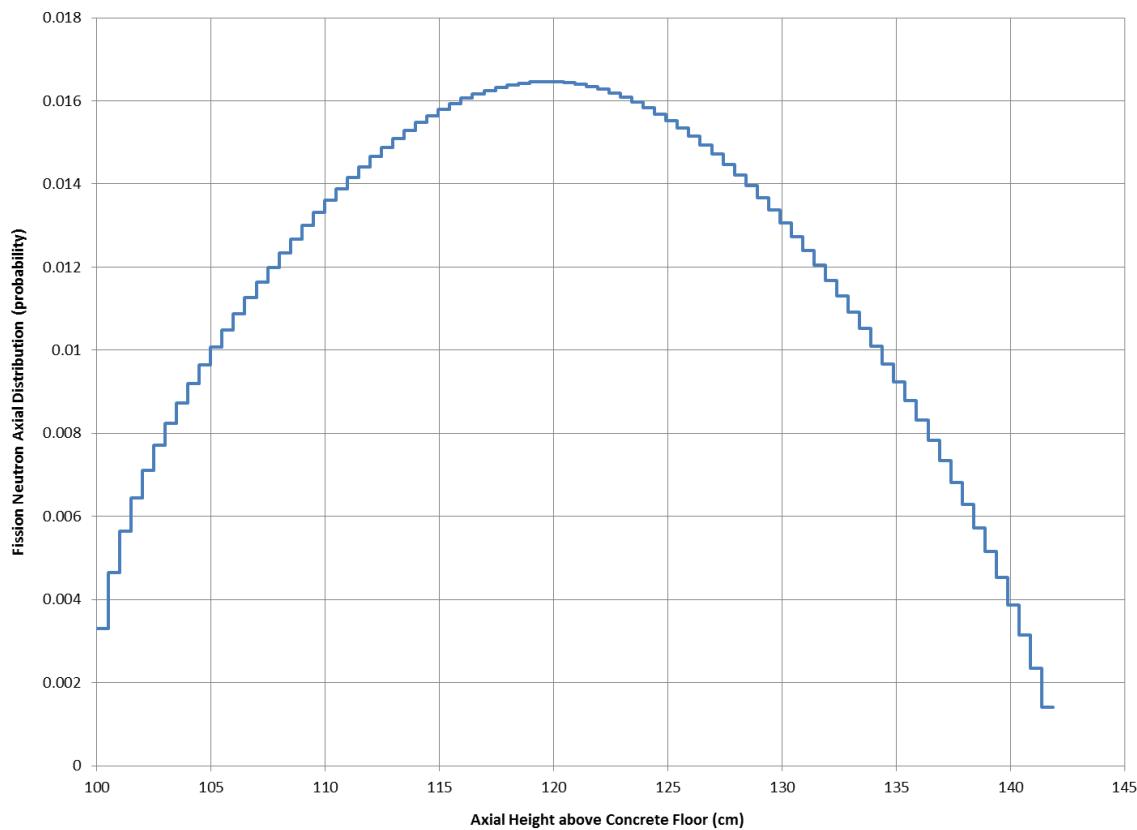


Fig. 4-2. SILENE pulse 1 axial distribution of fission neutrons calculated with MCNP6 using ENDF/B-VII.1 cross section data (.80c).

ALARM-TRAN-AIR-SHIELD-001

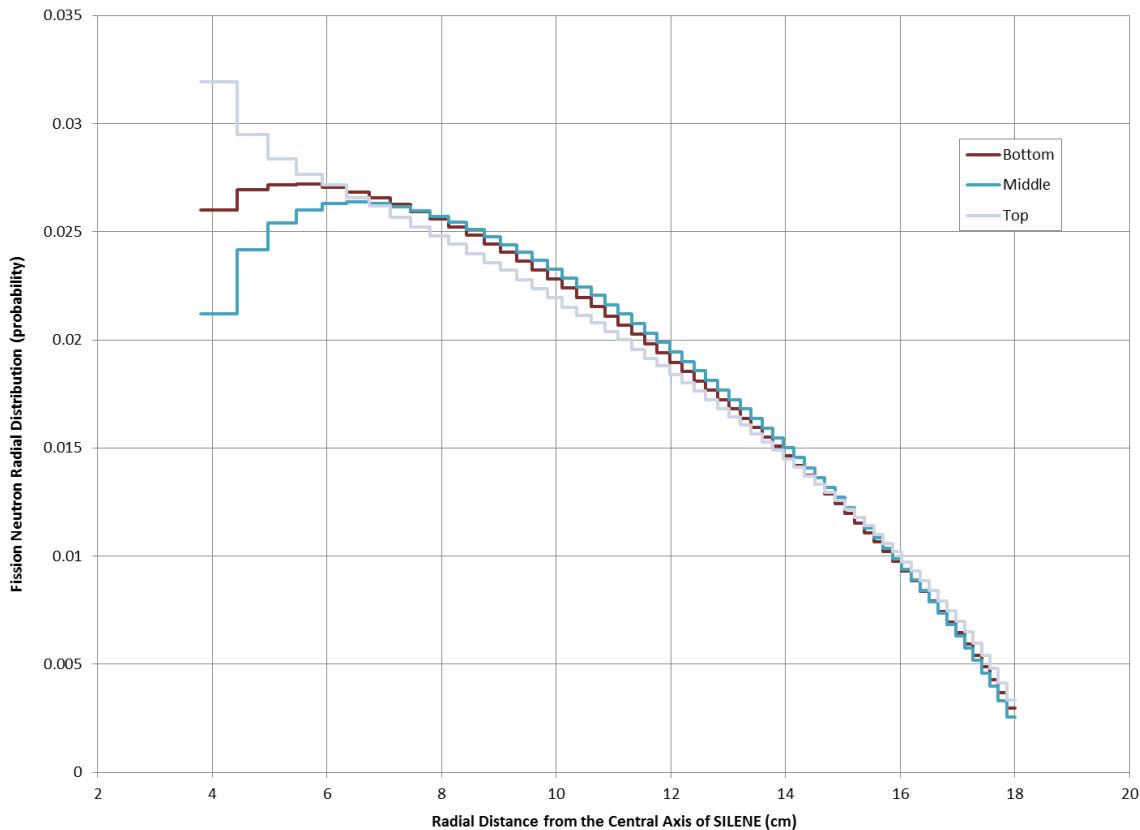


Fig. 4-3. Select SILENE pulse 1 radial distributions of fission neutrons calculated with MCNP6 using ENDF/B-VII.1 cross section data (.80c).

4.2 Response Functions and Normalization

The fundamental normalization of the benchmark model is the source strength, 4.583e17 neutrons, as presented in Sect. 4.1. However, in order for the results of the benchmark model to match the measured activation (Bq/g) and TLD dose (Gy) results, proper response functions must be applied and additional normalization factors are needed.

ALARM-TRAN-AIR-SHIELD-001

4.2.1 Neutron Activation Foil Response Functions and Normalization – Two sources of neutron activation foil response functions (activation cross sections) have been evaluated. These are ENDF/B-VII.1 and IRDF-2002 (International Reactor Dosimetry File). In general, the performance of these two sources of response functions has been very similar, with the exception of the indium reactions. The difference between the $^{115}\text{In}(n,n'\gamma)^{115m}\text{In}$ response function is understandable. The ENDF/B-VII.1 cross section data were evaluated for a transport library (80c MCNP6 and ce_v7.1_endf SCALE 6.2), which contains data to predict the nucleus being excited to different states but no data to accurately predict the full de-excitation process back to the ground state. Rather, transport libraries usually predict the de-excitation process on an average basis. IRDF-2002 is a reactor dosimetry library as the name implies and is specifically tailored to model this detailed de-excitation process. The reason for the significant difference between the $^{115}\text{In}(n,\gamma)^{116}\text{In}$ response function is unknown. The expectation for (n,γ) reactions was that these two libraries would perform very similarly, as with the gold and cobalt reactions. Plots of the preferred response functions are available in Figs. 4-4 through 4-12. The values are not listed anywhere in this report due to the large number of data points in continuous energy cross sections.

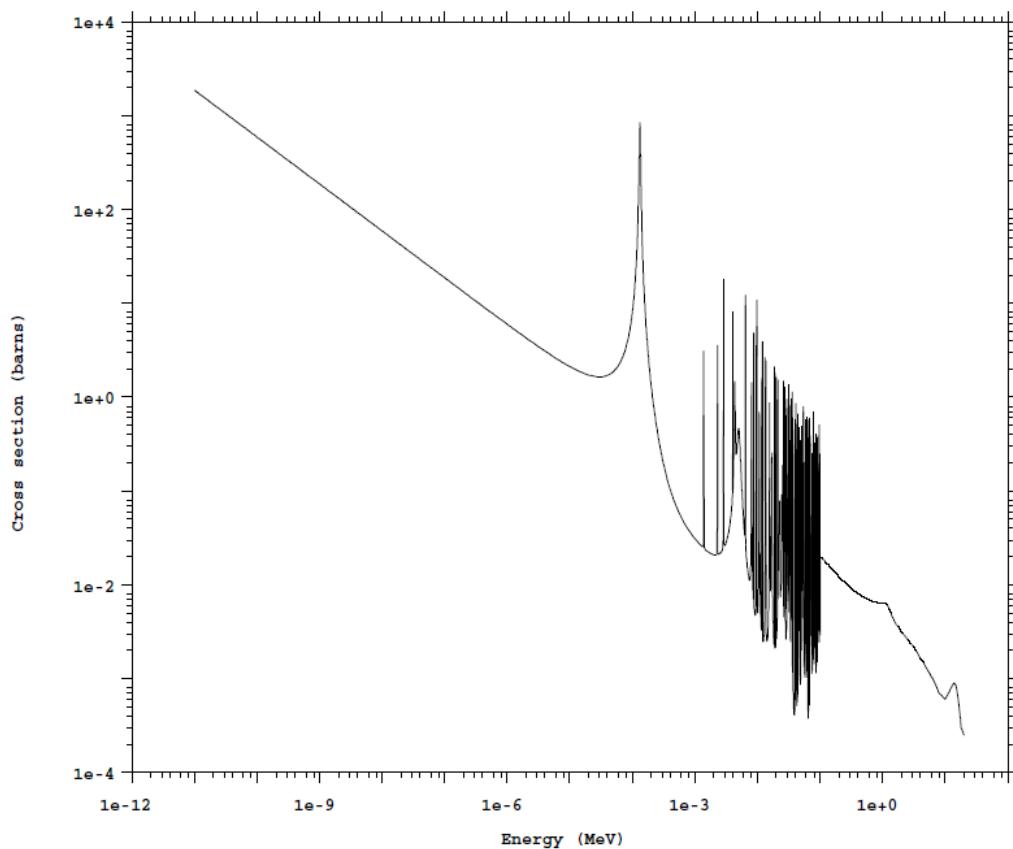


Fig. 4-4. $^{59}\text{Co}(n,\gamma)$ cross section from MCNP ENDF/B-VII.1 (.80c).

ALARM-TRAN-AIR-SHIELD-001

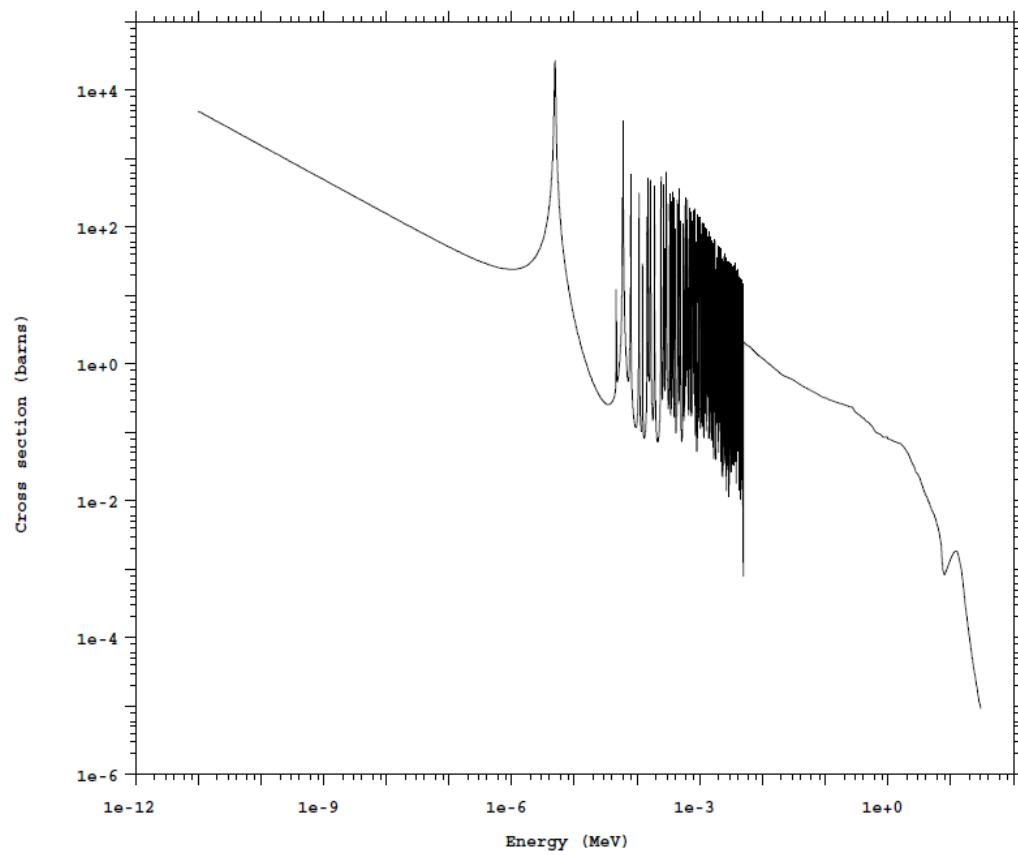


Fig. 4-5. $^{197}\text{Au}(\text{n},\gamma)$ cross section from MCNP ENDF/B-VII.1 (.80c).

ALARM-TRAN-AIR-SHIELD-001

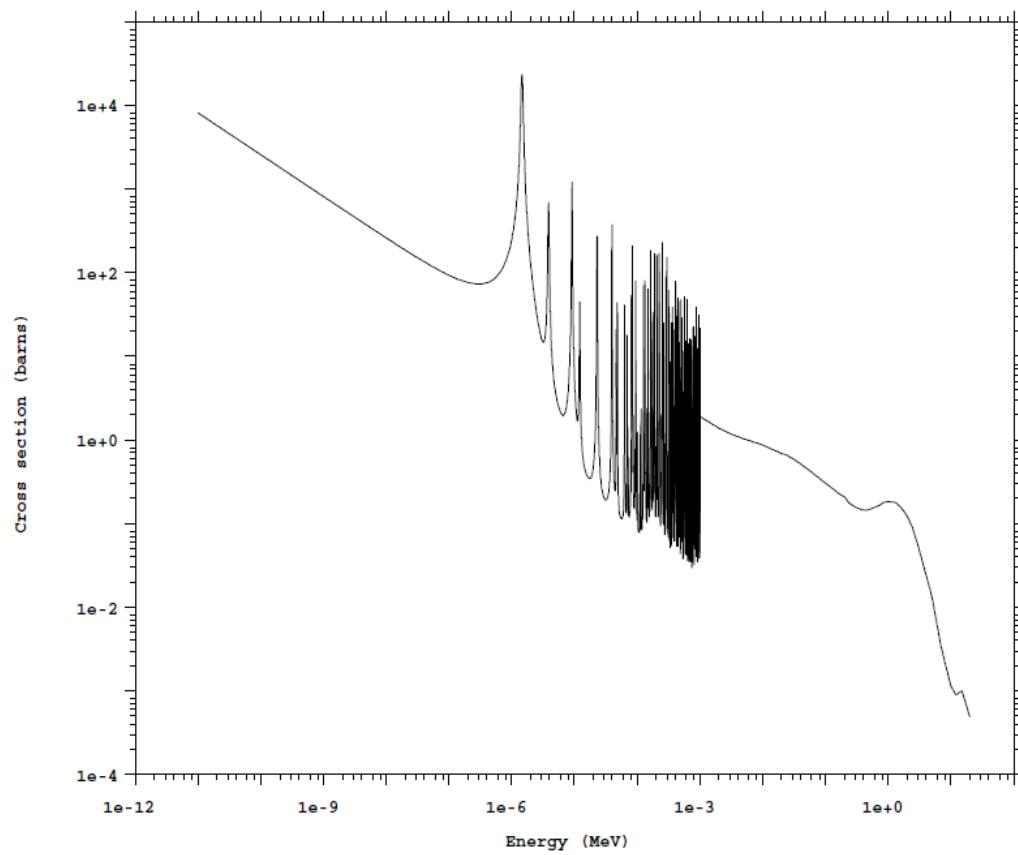


Fig. 4-6. $^{115}\text{In}(\text{n},\gamma)$ cross section from IRDF-2002 (.34y).

ALARM-TRAN-AIR-SHIELD-001

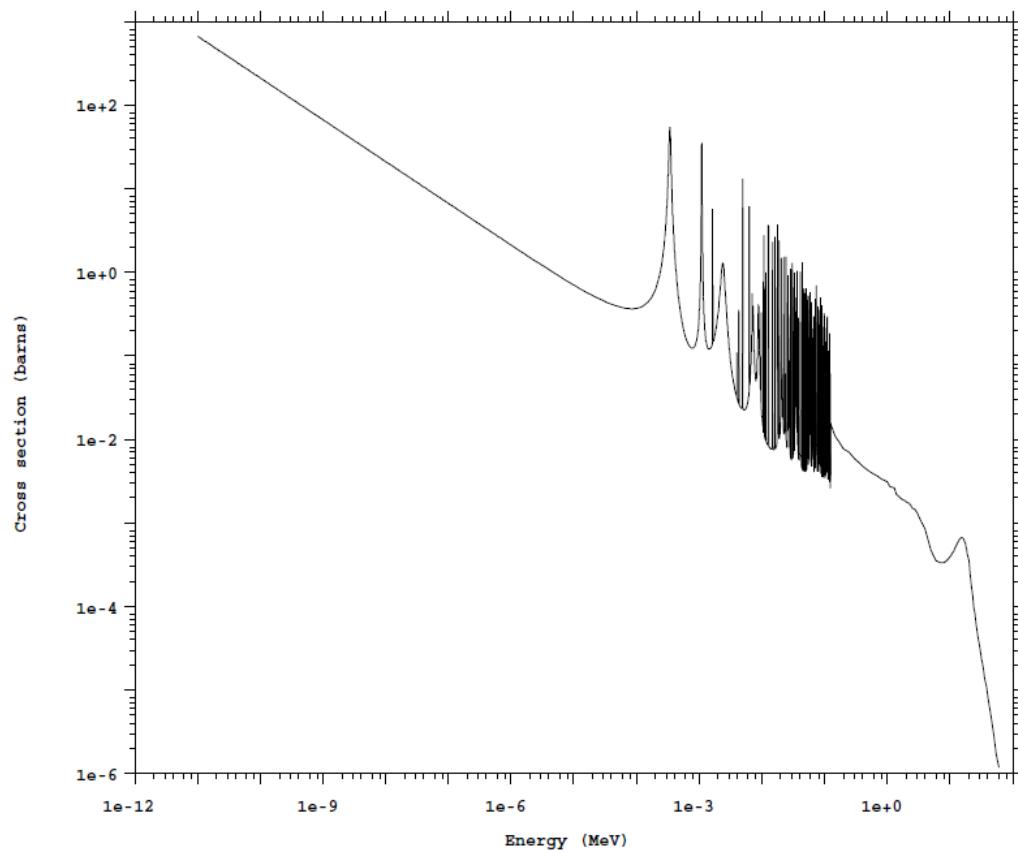


Fig. 4-7. $^{55}\text{Mn}(\text{n},\gamma)$ cross section from MCNP ENDF/B-VII.1 (.80c).

ALARM-TRAN-AIR-SHIELD-001

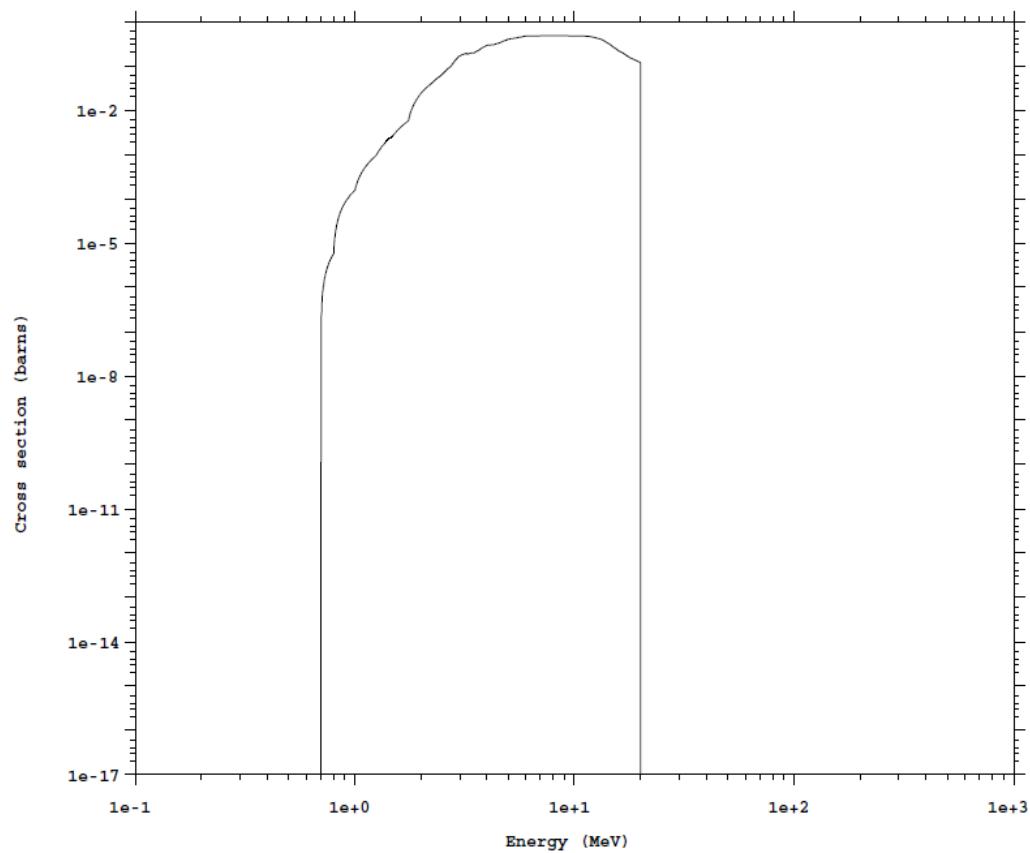


Fig. 4-8. ^{54}Fe (n,p) cross section from MCNP ENDF/B-VII.1 (.80c).

ALARM-TRAN-AIR-SHIELD-001

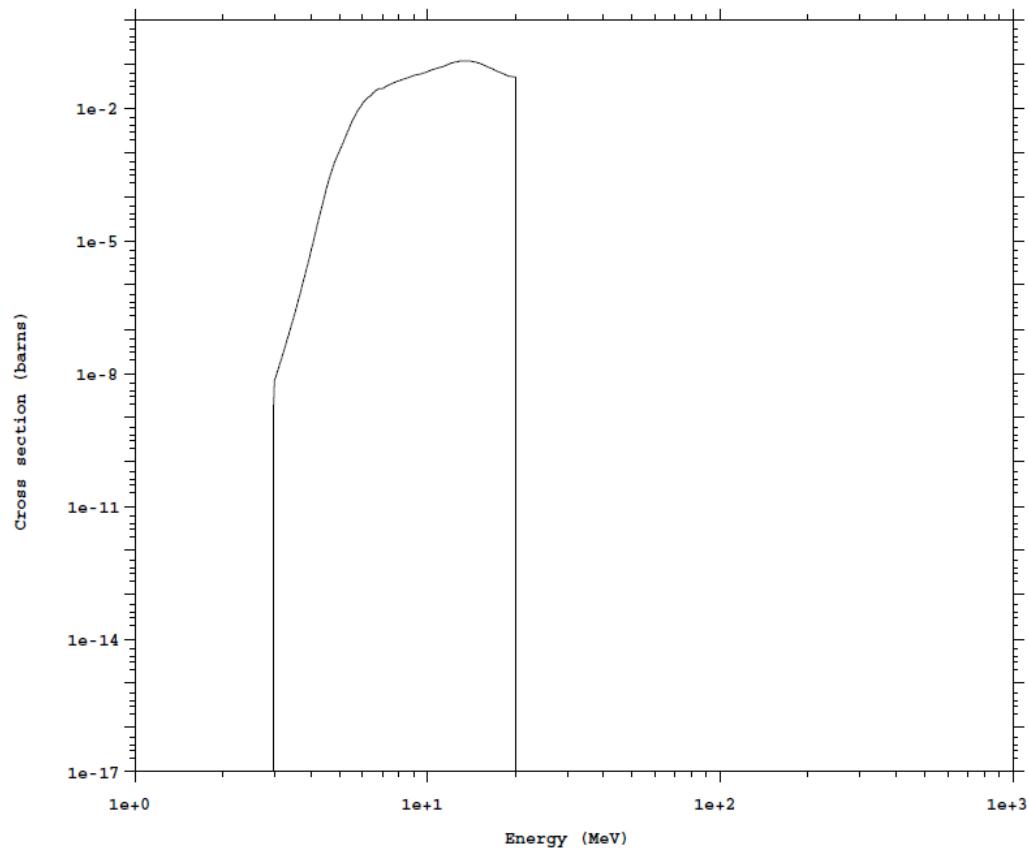


Fig. 4-9. $^{56}\text{Fe}(\text{n},\text{p})$ cross section from MCNP ENDF/B-VII.1 (.80c).

ALARM-TRAN-AIR-SHIELD-001

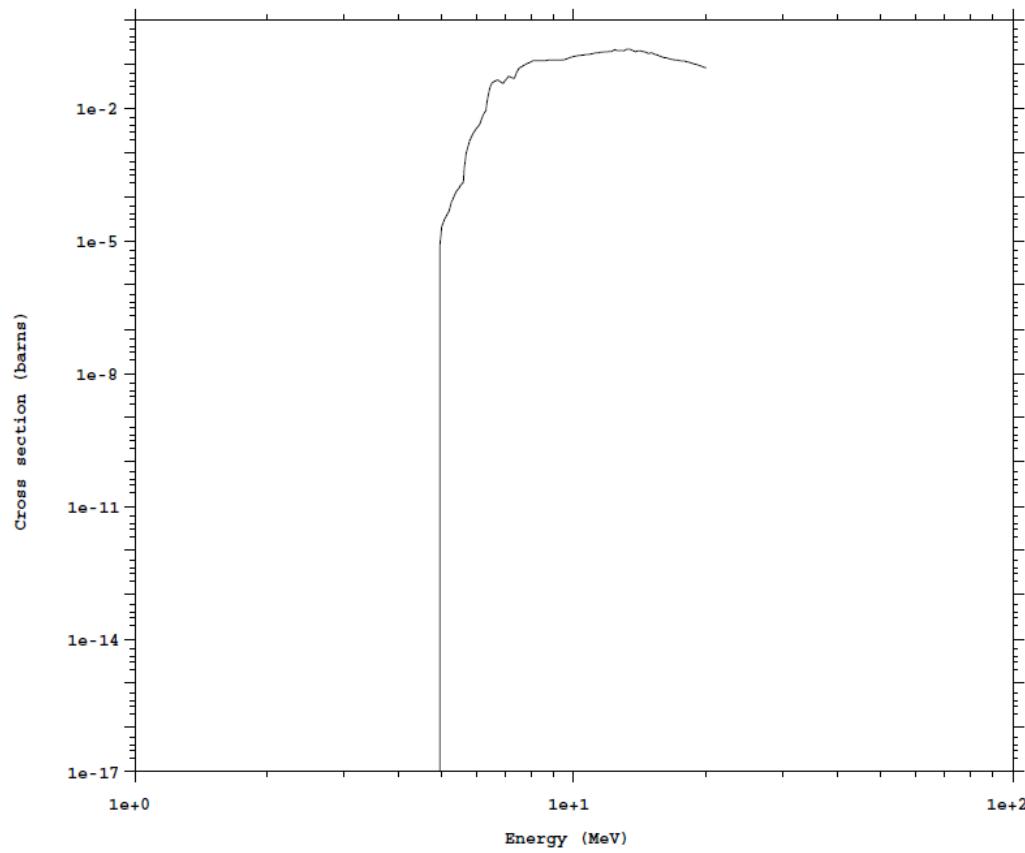


Fig. 4-10. $^{24}\text{Mg}(\text{n},\text{p})$ cross section from MCNP ENDF/B-VII.1 (.80c).

ALARM-TRAN-AIR-SHIELD-001

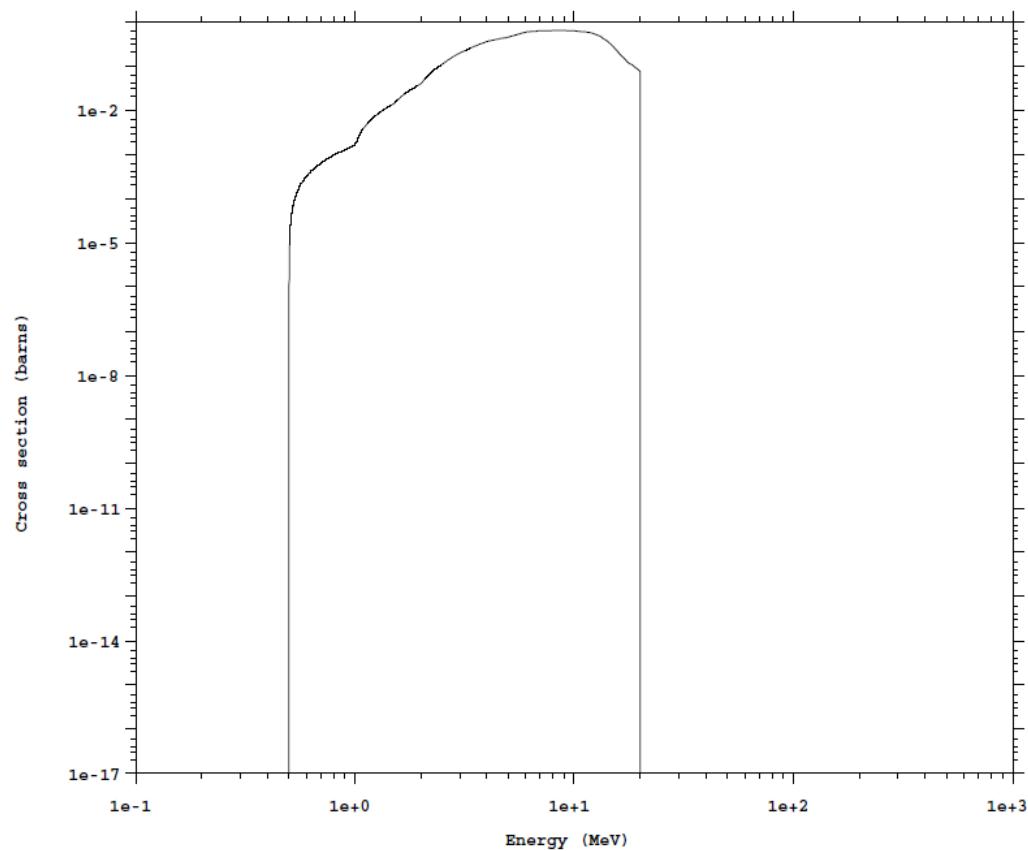


Fig. 4-11. $^{58}\text{Ni}(\text{n},\text{p})$ cross section from MCNP ENDF/B-VII.1 (.80c).

ALARM-TRAN-AIR-SHIELD-001

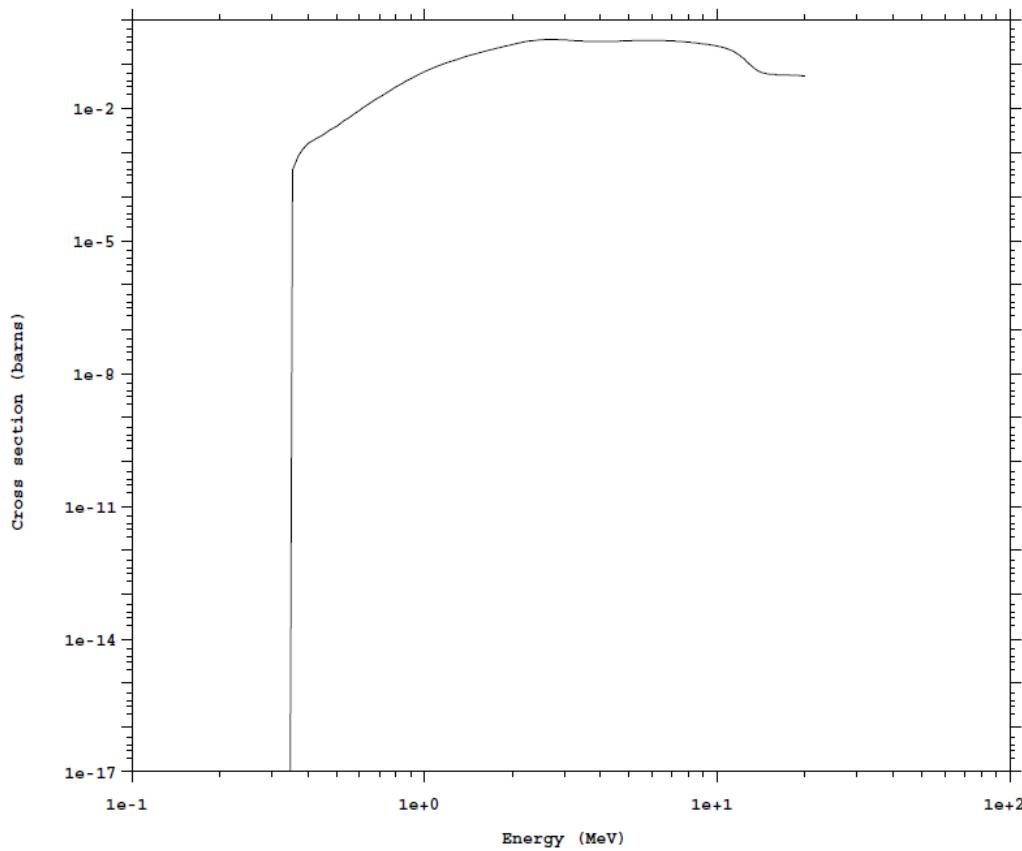


Fig. 4-12. ^{115}In ($n, n'\gamma$) cross section from IRDF-2002 (.34y).

Details to calculate the complete neutron tally normalization M_n are presented in Sect. 3.4.1.1, but the equation for this normalization factor is repeated below.

$$M_n = \frac{N_{fission} \bar{v} N_i \sigma_i \lambda_a e^{-\lambda_a T}}{\rho} = \frac{1.88e17 * \bar{v} N_i \sigma_i \lambda_a e^{-\lambda_a * 149}}{\rho}$$

Tables 4-1 through 4-7 show a portion of the complete neutron tally normalization for each neutron activation foil in the MCNP6 model. The half-lives used to calculate the decay constants were the same as those used by the dosimetrist (provided in Table 1-25). The normalization factors in Table 4-1 through 4-7 have units of [(Bq / b \times g) / (n / cm²)], so they still need to be multiplied by the energy dependent microscopic activation cross sections. The product of the energy-dependent neutron fluence, the appropriate energy dependent microscopic activation cross section, and the normalization factors in Tables 4-1 through 4-7 provide computational results in units of Bq/g.

ALARM-TRAN-AIR-SHIELD-001

Table 4-1. Case 1 collimator A complete tally normalization for neutron activation products

Foil	Reaction product	Normalization
Gold	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.170E+09
Indium	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	9.809E+10
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	4.741E+11
Iron	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	7.395E+06
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn}$	3.335E+11
	$^{55}\text{Mn}(\text{n}, \gamma)^{56}\text{Mn}$	1.150E+09
Nickel	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.613E+08
Cobalt	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	1.951E+07
Magnesium	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	1.149E+11

Table 4-2. Case 2 collimator B complete tally normalization for neutron activation products

Foil	Reaction product	Normalization
Gold	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.169E+09
Indium	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	9.783E+10
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	4.681E+11
Iron	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	7.395E+06
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn}$	3.320E+11
	$^{55}\text{Mn}(\text{n}, \gamma)^{56}\text{Mn}$	1.145E+09
Nickel	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.613E+08
Cobalt	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	1.951E+07
Magnesium	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	1.148E+11

Table 4-3. Case 3 free field complete tally normalization for neutron activation products

Foil	Reaction product	Normalization
Gold	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.169E+09
Indium	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	9.783E+10
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	4.681E+11
Iron	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	7.395E+06
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn}$	3.320E+11
	$^{55}\text{Mn}(\text{n}, \gamma)^{56}\text{Mn}$	1.145E+09
Nickel	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.613E+08
Cobalt	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	1.951E+07
Magnesium	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	1.148E+11

Table 4-4. Case 4 scattering box 1 complete tally normalization for neutron activation products

Foil	Reaction product	Normalization
Gold	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.169E+09
Indium	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	9.787E+10
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	4.683E+11
Iron	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	7.395E+06
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn}$	3.320E+11
	$^{55}\text{Mn}(\text{n}, \gamma)^{56}\text{Mn}$	1.145E+09
Nickel	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.613E+08
Cobalt	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	1.951E+07
Magnesium	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	1.148E+11

Table 4-5. Case 5 scattering box 2 complete tally normalization for neutron activation products

Foil	Reaction product	Normalization
Gold	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.169E+09
Nickel	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.613E+08
Cobalt	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	1.951E+07

Table 4-6. Case 6 scattering box 3 complete tally normalization for neutron activation products

Foil	Reaction product	Normalization
Gold	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.169E+09
Nickel	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.613E+08
Cobalt	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	1.951E+07

Table 4-7. Case 7 scattering box 4 complete tally

Foil	Reaction product	Normalization
Gold	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.169E+09
Nickel	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.613E+08
Cobalt	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	1.951E+07

ALARM-TRAN-AIR-SHIELD-001

4.2.2 Photon TLD Dose Response Functions and Normalization –Simulating the entire process of determining the dose absorbed by a TLD would start with simulating the energy deposition in the TLD material, which is not an uncommon type of simulation. However, the actual process of reading the TLD would also need to be simulated, which includes the process of heating it to produce and count visible photons. This is not a common type of simulation, but it is a crucial part of measuring the dose absorbed by a TLD. Many flux-to-dose conversion factors exist that allow analysts to combine these two steps into a single calculation by calculating flux instead of energy deposition and converting directly to dose, skipping the simulation of reading the TLD. The response function (flux-to-dose conversion factors) selected to represent the TLD response in the MCNP6, SCALE 6.2, COG 11.1, and TRIPOLI-4 models is the ICRU-57 air kerma response. The values of this response were taken from SCALE using the 47-gamma group structure with the lowest energy group boundary changed from 10 keV to 1 keV and the highest energy group boundary changed from 20 MeV to 50 MeV. The response function is shown in Fig. 4-13, and the tabulated values are listed in Appendix D.

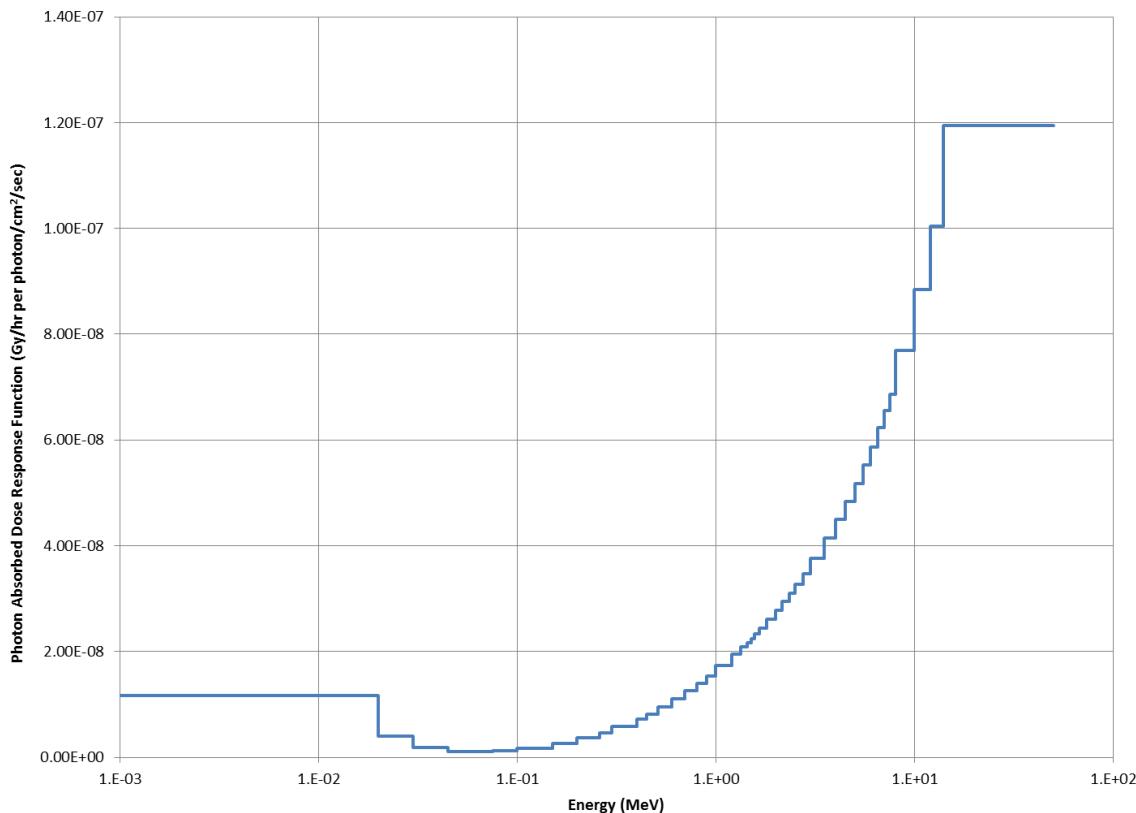


Fig. 4-13. ICRU-57 air kerma response function taken from SCALE 6.2, but using modified upper and lower energy boundaries.

Details to calculate the complete photon tally normalization M_p are presented in Sect. 3.4.1.2, but the equation for this normalization factor is repeated below.

$$M_p = \frac{N_{fission} \bar{\nu}}{F} = \frac{1.88e17 * \bar{\nu}}{F}$$

ALARM-TRAN-AIR-SHIELD-001

The parameter F discussed in Sect. 3.4.1.2 is set to 3,600 because the source strength is 4.583e17 neutrons, which produces a fluence tally results instead of flux and the ICRU-57 response function is expecting flux. The complete photon tally normalization for each TLD in the MCNP6, SCALE 6.2, COG 11.1, and TRIPOLI-4 models that provides computational results in units of Gy is 1.273e14.

4.3 Prompt Response Simulation Results

Sample calculation results for prompt neutron and photon responses are given in Table 4-8 through Table 4-15. The results presented in Tables 4-8 through 4-11 were calculated by the evaluators using the two-step method.

The results in Tables 4-12 and 4-13 were calculated by the evaluators using TRIPOLI-4. The neutron results in Table 4-12 used a two-step method, so a TRIPOLI-4 eigenvalue simulation was used to create a neutron source for a fixed-source simulation of the activity in the neutron activation foils. The photon results in Table 4-13 were calculated using a one-step method. There are a few deviations from the benchmark model in these TRIPOLI simulations. First, the boron and chlorine impurities in the concrete shielding blocks have all been ignored instead of just the boron impurity. Second, the masses quoted in Sect. 2.2.7 were used to calculate the density of the concrete shield blocks instead of using the densities reported by Soutrenon. There is also a difference between the TRIPOLI-4 response functions and the MCNP6, SCALE 6.2, and COG 11.1 response functions; the IRDF-2002 cross section library was used for all neutron activation foil response functions instead of just for the indium response functions.

The results in Tables 4-14 and 4-15 were calculated by the internal reviewer using the one-step method with the code COG 11.1.

Graphical comparison of the simulation results to the benchmark measurement results is presented in Appendix E. Finally, note that the cross section library name referenced in the title of the tables in this section refers to the cross sections used for the transport simulation. The cross sections used for the activation reaction response functions are those discussed in Sect. 4.2.1 and earlier in this section. All of the transport simulation cross sections are continuous energy cross sections. These neutron activation foils are thick enough so that appropriate self-shield methods should be used if the cross sections in the transport simulation are multigroup cross sections.

ALARM-TRAN-AIR-SHIELD-001

Table 4-8. Sample neutron activation calculation results with MCNP6 ENDF/B-VII.1 (US)

Position	Reaction	Activity (Bq/g)	Monte Carlo relative uncertainty	C/E	C/E relative uncertainty
Case 1 Collimator A	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	7.498E+01	0.0016	1.1343	0.0665
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	9.932E+06	0.0019	1.0902	0.0708
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	7.687E+03	0.0023	0.9573	0.0631
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	2.095E-01	0.0020	1.0158	0.0641
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.411E+03	0.0022	1.0435	0.0643
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	6.717E+01	0.0046	1.0993	0.0641
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.376E+01	0.0019	0.9581	0.0629
Case 2 Collimator B	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.848E+01	0.0013	1.2701	0.0820
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	3.008E+04	0.0019	1.2400	0.0837
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	3.642E+06	0.0015	1.2141	0.0847
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	1.308E+03	0.0020	1.0936	0.1139
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	3.515E-02	0.0021	1.1304	0.1214
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	9.160E+02	0.0017	1.1759	0.0782
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	1.196E+01	0.0061	1.1957	0.1338
Case 3 Free field	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	2.330E+00	0.0020	1.0991	0.1169
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	7.782E+01	0.0022	1.1755	0.0665
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	7.858E+04	0.0037	1.1307	0.0650
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	9.442E+06	0.0029	1.0754	0.0711
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	6.609E+03	0.0020	0.9635	0.0628
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.949E-01	0.0016	0.9941	0.0643
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.662E+03	0.0029	1.1080	0.0636
Case 4 Scattering box 1	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	6.549E+01	0.0043	1.1081	0.0644
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.271E+01	0.0016	0.9786	0.0629
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.947E+01	0.0014	1.3233	0.0771
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.939E+04	0.0017	1.2174	0.0811
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	3.357E+06	0.0014	1.2386	0.0761
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	5.321E+02	0.0040	1.0135	0.1015
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.155E-02	0.0034	1.0919	0.1214
Case 5 Scattering box 2	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	1.033E+03	0.0018	1.2183	0.0670
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	7.888E-01	0.0033	1.1173	0.1147
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	3.396E+01	0.0010	1.3269	0.0712
Case 6 Scattering box 3	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	3.261E+04	0.0015	1.2845	0.0693
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	4.244E-01	0.0049	1.4636	0.1232
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	5.373E+01	0.0010	1.2201	0.0695
Case 7 Scattering box 4	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	5.310E+04	0.0014	1.1906	0.0680
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.277E+00	0.0024	1.0115	0.0661
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	4.881E+01	0.0010	1.2224	0.0702
$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.790E+04	0.0014	1.2376	0.0685
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.451E+00	0.0031	1.0362	0.0658

ALARM-TRAN-AIR-SHIELD-001

**Table 4-9. Sample TLD dose calculation results with
MCNP6 ENDF/B-VII.1 (US)**

Position	TLD type	Dose (Gy)	Monte Carlo relative uncertainty	C/E	C/E relative uncertainty
Case 1 Collimator A	Al ₂ O ₃	4.811E+00	0.0047	0.7279	0.0786
Case 2 Collimator B	Al ₂ O ₃	6.732E-01	0.0066	0.8209	0.0982
Case 3 Free field	Al ₂ O ₃	4.172E+00	0.0034	1.1215	0.0788
Case 4 Scattering box 1	Al ₂ O ₃	4.292E-01	0.0090	0.7400	0.0851
Case 5 Scattering box 2	Al ₂ O ₃	3.018E-01	0.0078	0.6859	0.0821
Case 6 Scattering box 3	Al ₂ O ₃	1.194E+00	0.0063	0.6785	0.0784
Case 7 Scattering box 4	Al ₂ O ₃	1.281E+00	0.0042	0.6848	0.0908

ALARM-TRAN-AIR-SHIELD-001

**Table 4-10. Sample neutron activation calculation results with
SCALE 6.2 ENDF/B-VII.1 (US)**

Position	Reaction	Activity (Bq/g)	Monte Carlo relative uncertainty	C/E	C/E Relative uncertainty
Case 1 Collimator A	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	7.308E+01	0.0322	1.1056	0.0739
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	9.176E+06	0.0255	1.0072	0.0752
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	7.640E+03	0.0228	0.9515	0.0670
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	2.155E-01	0.0201	1.0452	0.0672
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.387E+03	0.0294	1.0334	0.0707
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	7.791E+01	0.0283	1.2751	0.0699
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.437E+01	0.0194	1.0010	0.0658
Case 2 Collimator B	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.916E+01	0.0026	1.3007	0.0821
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.995E+04	0.0031	1.2347	0.0838
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	3.594E+06	0.0027	1.1979	0.0847
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	1.315E+03	0.0066	1.0996	0.1141
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	3.640E-02	0.0101	1.1704	0.1218
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	9.503E+02	0.0026	1.2199	0.0782
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	1.332E+01	0.0218	1.3321	0.1355
Case 3 Free field	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	2.404E+00	0.0087	1.1340	0.1172
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	7.191E+01	0.0465	1.0863	0.0811
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	7.760E+04	0.0538	1.1166	0.0843
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	9.298E+06	0.0459	1.0590	0.0846
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	6.799E+03	0.0286	0.9911	0.0690
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.982E-01	0.0243	1.0107	0.0687
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.522E+03	0.0393	1.0496	0.0747
Case 4 Scattering box 1	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	7.005E+01	0.0295	1.1852	0.0707
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.327E+01	0.0268	1.0213	0.0684
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.752E+01	0.0168	1.2359	0.0789
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.838E+04	0.0258	1.1758	0.0851
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	3.190E+06	0.0215	1.1773	0.0790
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	5.827E+02	0.0459	1.1099	0.1113
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.191E-02	0.0164	1.1257	0.1225
Case 5 Scattering box 2	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	1.017E+03	0.0218	1.1995	0.0704
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	8.098E-01	0.0194	1.1470	0.1163
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	3.390E+01	0.0151	1.3249	0.0727
Case 6 Scattering box 3	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	3.176E+04	0.0154	1.2511	0.0710
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	4.845E-01	0.0829	1.6708	0.1484
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	5.361E+01	0.0259	1.2173	0.0742
Case 7 Scattering box 4	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.979E+04	0.0214	1.1163	0.0713
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.586E+00	0.0442	1.1068	0.0795
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	4.811E+01	0.0300	1.2050	0.0764
$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	4.642E+04	0.0347	1.1995	0.0768
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.542E+00	0.0636	1.0638	0.0915

ALARM-TRAN-AIR-SHIELD-001

**Table 4-11. Sample TLD dose calculation results with
 SCALE 6.2 ENDF/B-VII.1 (US)**

Position	TLD type	Dose (Gy)	Monte Carlo relative uncertainty	C/E	C/E relative uncertainty
Case 1 Collimator A	Al ₂ O ₃	4.974E+00	0.0867	0.7525	0.1169
Case 2 Collimator B	Al ₂ O ₃	6.439E-01	0.0522	0.7852	0.1110
Case 3 Free field	Al ₂ O ₃	3.649E+00	0.0783	0.9810	0.1110
Case 4 Scattering box 1	Al ₂ O ₃	3.905E-01	0.0371	0.6732	0.0924
Case 5 Scattering box 2	Al ₂ O ₃	3.014E-01	0.0575	0.6849	0.1000
Case 6 Scattering box 3	Al ₂ O ₃	1.159E+00	0.0914	0.6585	0.1203
Case 7 Scattering box 4	Al ₂ O ₃	1.166E+00	0.0914	0.6234	0.1288

ALARM-TRAN-AIR-SHIELD-001

**Table 4-12. Sample neutron activation calculation results with
TRIPOLI-4 JEFF-3.1.1 (CEA-V.5.1.1, France)**

Position	Reaction	Activity (Bq/g)	Monte Carlo relative uncertainty	C/E	C/E relative uncertainty
Case 1 Collimator A	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	7.91E+01	0.016	1.20	0.0684
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	1.11E+07	0.017	1.22	0.0727
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	7.41E+03	0.005	0.92	0.0632
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	2.07E-01	0.004	1.00	0.0642
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.24E+03	0.012	0.97	0.0654
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	6.20E+01	0.005	1.01	0.0641
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.43E+01	0.005	1.00	0.0630
Case 2 Collimator B	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.71E+01	0.028	1.21	0.0867
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.75E+04	0.023	1.13	0.0868
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	3.40E+06	0.029	1.13	0.0895
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	1.12E+03	0.011	0.94	0.1144
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	3.02E-02	0.011	0.97	0.1219
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	8.51E+02	0.039	1.09	0.0873
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	1.02E+01	0.029	1.02	0.1368
Case 3 Free field	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	2.10E+00	0.009	0.99	0.1172
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	7.51E+01	0.024	1.13	0.0707
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	8.14E+04	0.026	1.17	0.0699
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	9.41E+06	0.021	1.07	0.0741
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	6.40E+03	0.014	0.93	0.0643
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.87E-01	0.008	0.95	0.0647
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.49E+03	0.009	1.04	0.0641
Case 4 Scattering box 1	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	5.90E+01	0.004	1.00	0.0644
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.28E+01	0.006	0.98	0.0632
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.88E+01	0.029	1.29	0.0824
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	3.05E+04	0.039	1.26	0.0900
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	3.55E+06	0.025	1.31	0.0801
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	5.62E+02	0.026	1.07	0.1047
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.24E-02	0.054	1.17	0.1328
Case 5 Scattering box 2	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	9.01E+02	0.039	1.06	0.0775
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	7.90E-01	0.034	1.12	0.1196
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	3.39E+01	0.027	1.32	0.0761
Case 6 Scattering box 3	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	3.45E+04	0.037	1.36	0.0785
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	4.32E-01	0.027	1.49	0.1260
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	5.65E+01	0.022	1.28	0.0729
Case 7 Scattering box 4	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	5.45E+04	0.036	1.22	0.0770
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.39E+00	0.014	1.05	0.0675
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	4.93E+01	0.015	1.23	0.0718
$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$		5.04E+04	0.030	1.30	0.0748
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.53E+00	0.005	1.06	0.0659

ALARM-TRAN-AIR-SHIELD-001

**Table 4-13. Sample TLD dose calculation results with
TRIPOLI-4 JEFF-3.1.1 (CEA-V.5.1.1, France)**

Position	TLD type	Dose (Gy)	Monte Carlo relative uncertainty	C/E	C/E relative uncertainty
Case 1					
Collimator A	Al ₂ O ₃	5.44E+00	0.005	0.83	0.0786
Case 2					
Collimator B	Al ₂ O ₃	7.53E-01	0.036	0.92	0.1044
Case 3					
Free field	Al ₂ O ₃	4.54E+00	0.009	1.22	0.0792
Case 4					
Scattering box 1	Al ₂ O ₃	4.33E-01	0.021	0.75	0.0872
Case 5					
Scattering box 2	Al ₂ O ₃	2.96E-01	0.010	0.67	0.0824
Case 6					
Scattering box 3	Al ₂ O ₃	1.28E+00	0.008	0.73	0.0786
Case 7					
Scattering box 4	Al ₂ O ₃	1.33E+00	0.012	0.71	0.0915

ALARM-TRAN-AIR-SHIELD-001

**Table 4-14. Sample neutron activation calculation results with
COG 11.1 ENDF/B-VII.1 (US)**

Position	Reaction	Activity (Bq/g)	Monte Carlo relative uncertainty	C/E	C/E relative uncertainty
Case 1 Collimator A	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	7.310E+01	0.0107	1.1059	0.0673
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	9.760E+06	0.0103	1.0716	0.0715
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	7.640E+03	0.0105	0.9512	0.0639
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	2.099E-01	0.0149	1.0179	0.0658
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.371E+03	0.0135	1.0264	0.0656
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	6.770E+01	0.0584	1.1080	0.0866
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.369E+01	0.0142	0.9533	0.0644
Case 2 Collimator B	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.146E+01	0.0201	0.9572	0.0845
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.243E+04	0.0274	0.9245	0.0881
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	2.862E+06	0.0201	0.9539	0.0871
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	1.652E+03	0.0233	1.3813	0.1162
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	4.060E-02	0.0337	1.3055	0.1260
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	7.140E+02	0.0303	0.9166	0.0838
	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	1.352E+01	0.1190	1.3520	0.1790
Case 3 Free field	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.020E+00	0.0332	1.4245	0.1215
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	7.630E+01	0.0112	1.1526	0.0674
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	7.628E+04	0.0147	1.0975	0.0665
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	9.350E+06	0.0110	1.0653	0.0719
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	6.768E+03	0.0107	0.9866	0.0637
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.995E-01	0.0152	1.0173	0.0660
	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	2.632E+03	0.0141	1.0953	0.0651
Case 4 Scattering box 1	$^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$	6.098E+01	0.0574	1.0318	0.0862
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	1.275E+01	0.0148	0.9815	0.0646
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	2.845E+01	0.0196	1.2775	0.0796
	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	2.765E+04	0.0247	1.1456	0.0847
	$^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$	3.150E+06	0.0195	1.1607	0.0785
	$^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$	5.320E+02	0.0436	1.0133	0.1104
	$^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$	1.111E-02	0.0775	1.0501	0.1440
Case 5 Scattering box 2	$^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn} +$ $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$	1.011E+03	0.0374	1.1922	0.0767
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	8.610E-01	0.0719	1.2195	0.1353
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	3.274E+01	0.0183	1.2794	0.0735
Case 6 Scattering box 3	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	3.233E+04	0.0229	1.2733	0.0730
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.700E-01	0.1043	1.2759	0.1613
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	5.223E+01	0.0141	1.1860	0.0709
Case 7 Scattering box 4	$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$	5.340E+04	0.0180	1.1969	0.0704
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.270E+00	0.0301	1.0093	0.0726
	$^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$	4.790E+01	0.0153	1.1996	0.0719
$^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$		4.530E+04	0.0188	1.1697	0.0711
	$^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$	3.480E+00	0.0427	1.0450	0.0784

ALARM-TRAN-AIR-SHIELD-001

**Table 4-15. Sample TLD dose calculation results with
COG 11.1 ENDF/B-VII.1 (US)**

Position	TLD type	Dose (Gy)	Monte Carlo relative uncertainty	C/E	C/E relative uncertainty
Case 1 Collimator A	Al ₂ O ₃	5.810E+00	0.0221	0.8790	0.0815
Case 2 Collimator B	Al ₂ O ₃	9.990E-01	0.0523	1.2183	0.1111
Case 3 Free field	Al ₂ O ₃	4.960E+00	0.0236	1.3333	0.0822
Case 4 Scattering box 1	Al ₂ O ₃	6.390E-01	0.0676	1.1017	0.1083
Case 5 Scattering box 2	Al ₂ O ₃	5.370E-01	0.0743	1.2205	0.1105
Case 6 Scattering box 3	Al ₂ O ₃	1.610E+00	0.0397	0.9148	0.0877
Case 7 Scattering box 4	Al ₂ O ₃	1.630E+00	0.0393	0.8717	0.0988

4.4 Delayed Photon Response Simulation Results

During the planning and execution of these experiments (October 2009 to October 2010), the ability to simulate delayed gammas from fission products and activated nuclei as part of a neutron transport simulation was a relatively new feature in MCNPX 2.6.0. This ability has continued to be developed and is available in MCNP6 (the ACT input keyword) and COG 11.1 (the DGLIB and DELAYEDPHOTONS input keywords in the MIX and BASIC blocks, respectively). There are some limitations to this feature in MCNP6. For example, the ACT input is not available for eigenvalue simulations, and for fixed-source simulations, the ACT card does not produce any delayed gammas from fission products if the NONU card is used. An MCNP6 fixed-source simulation of this experiment requires the NONU card because the geometry is critical. COG 11.1 has only tested this feature with eigenvalue simulations and only delayed fission photons are produced, i.e., no activation photons. One has always been able to perform this type of calculation with any coupled neutron/photon radiation transport code using a two-step method (different from the 2-step method discussed previously in this section), which is required for SCALE 6.2 or TRIPOLI-4 to perform this type of analysis. First, the neutron flux in a material must be calculated, and that flux must be used to generate a delayed gamma source. This source can be generated for any transport code using ORIGEN, which is part of SCALE 6.2, or any other similar code. That delayed gamma source must then be used in a second simulation that calculates the desired response due to the delayed fission gammas and/or activation gammas. The experimenters and evaluators of this benchmark originally determined that any delayed gammas produced during this experiment would make a negligible contribution to the absorbed dose measured by the TLDs, when compared to the prompt fission gammas, capture gammas, and gammas produced by neutron inelastic scattering. Therefore, records have not been sought for the rate at which the fuel solution drained from SILENE nor the time when all the fuel solution was removed from the system (these data are likely available or could be calculated for a gravity driven system). Furthermore, no exact time was recorded for when the TLDs were removed from the SILENE room. Without this timing information, it is difficult to accurately predict the impact of any activation gammas on the absorbed doses measured by the TLDs.

The evaluators estimated the impact of the delayed photons for the TLD in collimator A using MCNP6 and ORIGEN. First, the average energy dependent neutron fluence in the fuel solution and geometry components inside collimator A was calculated. These fluences were used by ORIGEN to produce time-dependent, delayed photon sources in the fuel solution and collimator A geometry components. In the second step, these

ALARM-TRAN-AIR-SHIELD-001

sources were modeled in MCNP6, and the absorbed dose in the collimator A TLD due to delayed photons was calculated. This MCNP6 simulation did not model the fuel solution draining from SILENE, and the time cut off for delayed photons from the fuel solution was 30 seconds (Fig. 1-75). Instead of the fuel slowly draining from SILENE, it was all present before 30 seconds and was all removed after 30 seconds (i.e., a step change). The time cutoff was assumed to be three hours for the activation photons (approximately when the TLD was removed from the SILENE room). The results of this simulation are shown in Table 4-16, with dose contributions broken down into the fuel solution, the activated foils, and everything else. The doses in Table 4-16 represent the doses due to photons born within the given time bins. For example, the 149 second time bin represents doses due to gammas born between 30.3 and 149 seconds. The time bins of the sources were finer than the bins used to report the doses in Table 4-16. ORIGEN treats β decay by adding bremsstrahlung photons to the source spectra. Only two materials have bremsstrahlung spectra available a priori in ORIGEN—water and UO₂. The water bremsstrahlung spectrum was applied in the fuel solution. The UO₂ bremsstrahlung was applied everywhere else, which is an overestimate of the bremsstrahlung contribution. The contribution to the total dose by the UO₂ bremsstrahlung gammas was statistically insignificant.

Table 4-16. Collimator A TLD absorbed dose (Gy) due to delayed fission and activation gammas

	Dose (Gy)	Rel. Unc.	Dose (Gy)	Rel. Unc.	Dose (Gy)	Rel. Unc.
Time (sec)	30.3		149		3600	
Fuel	9.500E-01	0.0043	0.000E+00	0.0000	0.000E+00	0.0000
Foils	2.120E-05	0.0062	5.270E-06	0.0026	2.500E-06	0.0021
Other	7.650E-04	0.0101	4.190E-04	0.0116	2.440E-06	0.0167
Total	9.508E-01	0.0043	4.243E-04	0.0115	4.940E-06	0.0083
Time (sec)	7200		10800		Total	
Fuel	0.000E+00	0.0000	0.000E+00	0.0000	9.500E-01	0.0043
Foils	1.170E-06	0.0021	5.470E-07	0.0021	3.069E-05	0.0043
Other	1.830E-06	0.0176	1.430E-06	0.0186	1.190E-03	0.0077
Total	3.000E-06	0.0108	1.977E-06	0.0135	9.512E-01	0.0043

Table 4-16 shows that the delayed photons born three hours after the initiation of the experiment contribute about 0.95 Gy. This is an increase of the calculated collimator A TLD dose without delayed photons, 4.811 Gy (Table 4-9), of 19.8 percent. So the simulation with delayed photons under predicts the benchmark value, 6.610 Gy (Table 3-30), by 12.8 percent as compared to 27.2 percent without the delayed photons. An interesting observation is that practically the entire additional delayed photon dose is due to delayed fission photons, so the activation photons can be ignored.

Additionally, the independent reviewer evaluated the impact of delayed fission photons for 30 seconds following the initiation of the excursion (excluding delayed activation photons) using COG 11.1. As with the MCNP6 and ORIGEN analysis, the solution draining from SILENE was not modeled. This evaluation was completed for all measurement locations and used a one-step method. Table 4-17 presents the results of these COG simulations including delayed fission photons. Also included in this table is the ratio of the doses with delayed fission photons to without delayed fission photons as calculated by COG 11.1 (Table 4-15).

ALARM-TRAN-AIR-SHIELD-001

Table 4-17. COG TLD doses with delayed fission photons

Location	Dose (Gy)	Rel. Unc.	Ratio: with delayed / without delayed	Rel. Unc.
Case 1 Collimator A	5.810	0.0221	1.10	0.0304
Case 2 Collimator B	0.999	0.0523	1.09	0.0728
Case 3 Free field	4.960	0.0236	1.16	0.0327
Case 4 Scattering box 1	0.639	0.0676	1.10	0.0934
Case 5 Scattering box 2	0.537	0.0743	1.01	0.1020
Case 6 Scattering box 3	1.610	0.0397	1.17	0.0547
Case 7 Scattering box 4	1.630	0.0393	1.13	0.0542

The average of all the ratios in Table 4-17 represents an increased dose of 11 percent. However, only the doses for collimator A, the free field location, and scattering box positions 3 and 4 are statistically different between the calculations with and without delayed photons. The average increase for these cases represents an increased dose of 15 percent. Note that for collimator A, the increase dose calculated by MCNP6 and ORIGEN was about 19.8 percent, whereas it is about 10 percent for COG. TRIPOLI-4 and the DARWIN burnup codes have shown the delayed fission photons to account for 13 to 16 percent of the gamma heating deposition in the calorimeter measurements for a typical material testing reactor.^a All these simulation results are in line with measurement results observed by Sono^b et al. Therefore, the evaluators have determined that the addition of delayed photons will increase the calculated TLD dose between 10 and 20 percent, and possibly less for shielded TLDs.

^a Y. K. Lee, et. al., "A Gamma Heating Calculation Methodology for Research Reactor Application," 5th Int. Topical Meeting on Research Reactor Fuel Management, RRFM 2001, Aachen, Germany, p. 147, April, 2001.

^b H. Sono, et. al., "Evaluation of Gamma-Ray Dose Components in Criticality Accident Situations," *Journal of Nuclear Science and Technology*, **42**, pp. 678 (2005).

ALARM-TRAN-AIR-SHIELD-001

5.0 REFERENCES

1. J. Piot, *2010 CAAS Test on the SILENE Reactor, Data for CAAS Experiment Modeling*, CEA/VA/DRMN/SRNC, Valduc, 2011.
2. X. Jacquet, G. Rousseau, and L. Savanier, *Rapport d'Essais – Dossier d'Experience No 2011/014.a*, CEA/VA/DRMN/SRNC, Valduc, 2011.

ALARM-TRAN-AIR-SHIELD-001

APPENDIX A: TYPICAL INPUT LISTINGS

A.1 MCNP6 Input Listings – Two-Step Method (US)

In order to use the IRDF-2002 cross sections, they must be downloaded from the IAEA at <https://www-nds.iaea.org/irdf2002/index.htmlx>. The cross sections should be downloaded in ACE format in order to use them with MCNP6. The MCNP6 input files presented in this appendix expect the IRDF-2002 cross sections to be in the same directory as the input file and to be named irdf-2002.

A.1.1 MCNP6 Eigenvalue Input – The first step of the two-step method is to run an eigenvalue calculation that tallies the spatial and energy dependent distribution of fission neutrons. The MCNP6 input for this simulation is `mcnp\source\fineMesh\pulse1`. This input contains a cylindrical mesh tally to calculate the spatial distribution of fission neutrons. The results of the mesh tally used in the next step are based on 120,000 histories per batch, 19,070 total batches, and 30 skipped batches.

Also included is an MCNP6 input with a PTRAC card, `mcnp\source\chi.1000\pulse1`, which was used to write the starting energy of all source neutrons. The energies of the source particles saved in the PTRAC file were used to create the energy distribution of fission neutrons. This input uses 5,000 histories per batch, 9,550 total batches, and 30 skipped batches. However, data begin to be written to the PTRAC file after the second batch. Since MCNP cannot run in parallel when writing a PTRAC file, 400 instances of this simulation were run, each using a unique starting random number seed and stride. Therefore, the final analysis of the PTRAC data included 3,819,200 batches of 5,000 particles each.

A.1.2 MCNP6 Fixed-Source Input – The second step of the two-step method is to run a fixed-source calculation that tallies all detector responses. In this case the detector responses are neutron activation of foils and absorbed dose deposited in TLDs. The tally of fission neutrons from the first step is converted to a source for the second step. Weight windows were generated for the second step MCNP6 simulations using the ADVANTG^a code. The weight window input files (`wwinp`) are included, and can be used directly in order to skip repeating the ADVANTG calculations. The inputs for the ADVANTG calculations are included in Appendix B. In order to make the MCNP6 simulations more efficient, a separate MCNP6 simulation for collimator A, collimator B, the free field location, and each of the four positions within the scattering box was run. Each MCNP6 simulation had its one set of weight windows and biased source, and therefore its own ADVANTG input. Links to the MCNP6 input files and weight window files are listed below in Table A-1. In each MCNP6 fixed-source simulation 400,000,000 histories were simulated.

^a S.W. Mosher et al., *ADVANTG--An Automated Variance Reduction Parameter Generator*, ORNL/TM-2013/416 Rev. 1, Oak Ridge National Laboratory, 2015.

ALARM-TRAN-AIR-SHIELD-001

Table A-1. Links to MCNP6 input and weight window files

Location	MCNP6 Input	MCNP6 Weight Windows
Collimator A	mcnp\ca\pulse1ww.in	mcnp\ca\pulse1ww.wwinp
	mcnp\cb\pulse1ww.in	mcnp\cb\pulse1ww.wwinp
Collimator B	mcnp\ff\pulse1ww.in	mcnp\ff\pulse1ww.wwinp
	mcnp\sb1\pulse1ww.in	mcnp\sb1\pulse1ww.wwinp
Scattering box 1	mcnp\sb2\pulse1ww.in	mcnp\sb2\pulse1ww.wwinp
	mcnp\sb3\pulse1ww.in	mcnp\sb3\pulse1ww.wwinp
Scattering box 2	mcnp\sb4\pulse1ww.in	mcnp\sb4\pulse1ww.wwinp
	mcnp\sb5\pulse1ww.in	mcnp\sb5\pulse1ww.wwinp
Scattering box 3	mcnp\sb6\pulse1ww.in	mcnp\sb6\pulse1ww.wwinp
	mcnp\sb7\pulse1ww.in	mcnp\sb7\pulse1ww.wwinp
Scattering box 4		

A.2 SCALE 6.2 Input Listings – Two-Step Method (US)

A.2.1 SCALE 6.2 Eigenvalue Input – The first step of the two-step method is to run an eigenvalue calculation that tallies the spatial and energy dependent distribution of fission neutrons. The CSAS6/Keno-VI eigenvalue input is [scale\cekeno\pulse1_endf71_293k.inp](#). This input contains a Cartesian mesh tally to calculate the spatial and energy distribution of fission neutrons. The results of the mesh tally used in the next step are based on 50,000 histories per batch, 60,200 total batches, and 200 skipped batches.

A.2.2 SCALE 6.2 Fixed-Source Input – The second step of the two-step method is to run a fixed-source calculation that tallies all detector responses. In this case the detector responses are neutron activation of foils and absorbed dose deposited in TLDs. The tally of fission neutrons from the first step is converted to a source for the second step. Weight windows and a biased source are automatically generated as part of the MAVRIC sequence. In order to make the MAVRIC/Monaco simulations more efficient, a separate MAVRIC/Monaco simulation for collimator A, collimator B, the free field location, and each of the four positions within the scattering box was run. Each MAVRIC/Monaco simulation had its own set of weight windows and biased source. Links to the SCALE 6.2 MAVRIC/Monaco input files are listed below in Table A-2. Each of the MAVRIC/Monaco inputs simulates 20 batches with 25,000,000 histories per batch. However, 20 copies of each input file was created and run with a different random number seed, so each SCALE 6.2 fixed source simulation ran a total of 10,000,000,000 histories.

ALARM-TRAN-AIR-SHIELD-001

Table A-2. Links to SCALE 6.2 input and weight window files

Location	MAVRIC/Monaco Input
Case 1	scale\cemonaco\ca\pulse1_endf71_293k.inp
Collimator A	
Case 2	scale\cemonaco\cb\pulse1_endf71_293k.inp
Collimator B	
Case 3	scale\cemonaco\ff\pulse1_endf71_293k.inp
Free field	
Case 4	scale\cemonaco\sb1\pulse1_endf71_293k.inp
Scattering box 1	
Case 5	scale\cemonaco\sb2\pulse1_endf71_293k.inp
Scattering box 2	
Case 6	scale\cemonaco\sb3\pulse1_endf71_293k.inp
Scattering box 3	
Case 7	scale\cemonaco\sb4\pulse1_endf71_293k.inp
Scattering box 4	

A.3 TRIPOLI-4 Input Listings – One- and Two-Step Methods (France)

The activity produced in the neutron activation foils was simulated by TRIPOLI-4 using a two-step method. The dose absorbed by the TLDs was simulated by TRIPOLI-4 using a one-step method. A single TRIPOLI-4 input, [tripoli\p1-icsbep](#), with the full geometry and all tallies (all cases), which can be modified to simulate the one-step or two-step methods, is available.

A.4 COG 11.1 Input Listings – One-Step Method (US)

The COG 11.1 simulations were performed using the one-step method, i.e., a single eigenvalue calculation with detector response tallies. This method avoids the need to create a source for a fixed-source simulation and the approximations introduced by discretizing the source. However, this method requires more CPU time because some variance reduction techniques cannot be used. The file [cog\COG-SILENE-INPUT](#) contains the COG 11.1 input with all the required tallies (all cases). The COG 11.1 eigenvalue simulation ran 2,000 particles per batch, 9,000,000 batches, and skipped 100 initial batches.

ALARM-TRAN-AIR-SHIELD-001

APPENDIX B: ADVANTG INPUT LISTINGS

B.1 ADVANTG Input Listings

ADVANTG is used to generate mesh-based weight windows and biased source parameters for MCNP simulations. ADVANTG has a simple input file that identifies the method to be used to generate weight windows and biased sources, provides a mesh for the discrete ordinates calculations and other parameters needed by the discrete ordinates calculation, and identifies the name of the MCNP input and what tallies the generated weight windows and the biased source should optimize. Links to the ADVANTG input files are listed in Table B-1. Also listed in Table B-1 is the MCNP5 input files ADVANTG used. These are necessary because ADVANTG does not recognize new MCNP6 keywords. Depending on your xsdir file, ADVANTG may not recognize new cross sections that are distributed with MCNP6.

Table B-1. Links to ADVANTG and MCNP5 input files

Location	ADVANTG Input	MCNP5 Input for ADVANTG
Case 1		
Collimator A	mcnp\ca\advantg.in	mcnp\ca\pulse1adv
Case 2		
Collimator B	mcnp\cb\advantg.in	mcnp\cb\pulse1adv
Case 3		
Free field	mcnp\ff\advantg.in	mcnp\ff\pulse1adv
Case 4		
Scattering box 1	mcnp\sb1\advantg.in	mcnp\sb1\pulse1adv
Case 5		
Scattering box 2	mcnp\sb2\advantg.in	mcnp\sb2\pulse1adv
Case 6		
Scattering box 3	mcnp\sb3\advantg.in	mcnp\sb3\pulse1adv
Case 7		
Scattering box 4	mcnp\sb4\advantg.in	mcnp\sb4\pulse1adv

ALARM-TRAN-AIR-SHIELD-001

APPENDIX C: SOURCE DISTRIBUTIONS

C.1 Source

Below are tables of the source distributions plotted in Sect. 4.1. These distributions were created during the MCNP eigenvalue simulation (first step) of the two-step method. The tallies from the eigenvalue calculation have been made into probability distribution functions for the plots in section 4.1 and the tables in this appendix. Also included in this appendix are the relative errors from the tallies, which illustrate how much uncertainty was present in the tallies that were converted to a fixed source.

Table C-1 below provides the energy distribution of fission neutrons plotted in Fig. 4-1. As discussed in Appendix A, this distribution was created by post processing MCNP PTRAC data from an eigenvalue simulation of the benchmark. After the second batch of this eigenvalue simulation was completed, the energy of each subsequent source neutron was written to the PTRAC file. All of these energies were collected in post processing, and the distribution in Table C-1 was created. Note two results of this method. First, only the energy was considered. Position was ignored, so the energy dependence of the source neutrons has been decoupled from the position of source neutrons. It has been assumed that the energy and spatial dependence of the source are separable. Second, the energy distribution has been discretized, but it contains contributions from all fissionable isotopes in the fuel solution in the correct proportions.

Table C-1. Energy distribution of fission neutrons (cont)

Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error
5.0435E-06 (minimum energy)								
5.3300E-06	1.7671E-09	0.1741	8.0100E-02	1.0110E-04	0.0007	1.6699E+00	4.7500E-03	0.0001
5.6165E-06	1.7136E-09	0.1768	8.0701E-02	1.0171E-04	0.0007	1.6869E+00	4.7465E-03	0.0001
5.9030E-06	1.1245E-09	0.2182	8.1301E-02	1.0182E-04	0.0007	1.7038E+00	4.6887E-03	0.0001
6.1895E-06	1.4458E-09	0.1925	8.1902E-02	1.0236E-04	0.0007	1.7208E+00	4.6847E-03	0.0001
6.4760E-06	1.4458E-09	0.1925	8.2503E-02	1.0259E-04	0.0007	1.7377E+00	4.6267E-03	0.0001
6.8439E-06	2.0349E-09	0.1622	8.3306E-02	1.3779E-04	0.0006	1.7555E+00	4.8386E-03	0.0001
7.2117E-06	1.6065E-09	0.1826	8.4109E-02	1.3826E-04	0.0006	1.7733E+00	4.8037E-03	0.0001
7.5796E-06	1.7671E-09	0.1741	8.4911E-02	1.3875E-04	0.0006	1.7912E+00	4.7970E-03	0.0001
7.9474E-06	1.9278E-09	0.1667	8.5714E-02	1.3935E-04	0.0006	1.8090E+00	4.7351E-03	0.0001
8.3153E-06	2.0349E-09	0.1622	8.6517E-02	1.3995E-04	0.0006	1.8268E+00	4.7003E-03	0.0001
8.7876E-06	2.1420E-09	0.1581	8.8821E-02	4.0510E-04	0.0004	1.8455E+00	4.9000E-03	0.0001
9.2600E-06	1.8207E-09	0.1715	9.1125E-02	4.0998E-04	0.0004	1.8643E+00	4.8869E-03	0.0001
9.7323E-06	2.8381E-09	0.1374	9.3429E-02	4.1505E-04	0.0004	1.8830E+00	4.8226E-03	0.0001
1.0205E-05	2.5704E-09	0.1443	9.5733E-02	4.1952E-04	0.0004	1.9018E+00	4.8086E-03	0.0001
1.0677E-05	3.1594E-09	0.1302	9.8037E-02	4.2422E-04	0.0004	1.9205E+00	4.7458E-03	0.0001
1.1284E-05	3.6949E-09	0.1204	1.0065E-01	4.8745E-04	0.0003	1.9402E+00	4.9566E-03	0.0001
1.1890E-05	3.7485E-09	0.1195	1.0326E-01	4.9121E-04	0.0003	1.9599E+00	4.9129E-03	0.0001
1.2497E-05	3.0523E-09	0.1325	1.0587E-01	4.9659E-04	0.0003	1.9796E+00	4.8702E-03	0.0001
1.3103E-05	3.2130E-09	0.1291	1.0848E-01	5.0222E-04	0.0003	1.9993E+00	4.8257E-03	0.0001
1.3710E-05	3.3736E-09	0.1260	1.1109E-01	5.0778E-04	0.0003	2.0190E+00	4.7809E-03	0.0001
1.4489E-05	5.1408E-09	0.1021	1.1223E-01	2.2379E-04	0.0005	2.0397E+00	4.9771E-03	0.0001
1.5268E-05	5.0872E-09	0.1026	1.1337E-01	2.2464E-04	0.0005	2.0604E+00	4.9295E-03	0.0001
1.6046E-05	4.5517E-09	0.1085	1.1451E-01	2.2581E-04	0.0005	2.0811E+00	4.8799E-03	0.0001
1.6825E-05	5.0337E-09	0.1031	1.1565E-01	2.2692E-04	0.0005	2.1018E+00	4.8325E-03	0.0001
1.7604E-05	4.3911E-09	0.1104	1.1679E-01	2.2792E-04	0.0005	2.1225E+00	4.7842E-03	0.0001
1.8604E-05	6.3189E-09	0.0921	1.1799E-01	2.4065E-04	0.0005	2.1443E+00	4.9870E-03	0.0001
1.9604E-05	6.2118E-09	0.0928	1.1918E-01	2.3982E-04	0.0005	2.1660E+00	4.9107E-03	0.0001

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-1. Energy distribution of fission neutrons (cont)

Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error
2.0603E-05	6.8544E-09	0.0884	1.2038E-01	2.4308E-04	0.0005	2.1878E+00	4.8800E-03	0.0001
2.1603E-05	6.7473E-09	0.0891	1.2157E-01	2.4249E-04	0.0005	2.2095E+00	4.8046E-03	0.0001
2.2603E-05	6.6937E-09	0.0894	1.2277E-01	2.4558E-04	0.0005	2.2313E+00	4.7739E-03	0.0001
2.3887E-05	7.1757E-09	0.0864	1.2403E-01	2.5887E-04	0.0005	2.2464E+00	3.2767E-03	0.0001
2.5171E-05	8.1931E-09	0.0808	1.2529E-01	2.6018E-04	0.0005	2.2615E+00	3.2515E-03	0.0001
2.6455E-05	8.0325E-09	0.0816	1.2655E-01	2.6138E-04	0.0005	2.2767E+00	3.2472E-03	0.0001
2.7739E-05	9.5854E-09	0.0747	1.2781E-01	2.6220E-04	0.0005	2.2918E+00	3.2009E-03	0.0001
2.9023E-05	8.9964E-09	0.0772	1.2907E-01	2.6353E-04	0.0005	2.3069E+00	3.1750E-03	0.0001
3.0672E-05	1.3013E-08	0.0642	1.3039E-01	2.7734E-04	0.0004	2.3147E+00	1.6303E-03	0.0002
3.2320E-05	1.0817E-08	0.0704	1.3172E-01	2.8072E-04	0.0004	2.3224E+00	1.6028E-03	0.0002
3.3969E-05	1.2477E-08	0.0655	1.3304E-01	2.7966E-04	0.0004	2.3302E+00	1.6177E-03	0.0002
3.5617E-05	1.0817E-08	0.0704	1.3437E-01	2.8313E-04	0.0004	2.3379E+00	1.5899E-03	0.0002
3.7266E-05	1.1299E-08	0.0688	1.3569E-01	2.8218E-04	0.0004	2.3457E+00	1.6046E-03	0.0002
3.9383E-05	1.7297E-08	0.0556	1.3708E-01	2.9834E-04	0.0004	2.3496E+00	7.9944E-04	0.0003
4.1500E-05	1.6065E-08	0.0577	1.3847E-01	2.9975E-04	0.0004	2.3535E+00	7.9771E-04	0.0003
4.3617E-05	1.4833E-08	0.0601	1.3986E-01	3.0099E-04	0.0004	2.3575E+00	8.1654E-04	0.0003
4.5734E-05	1.4458E-08	0.0609	1.4125E-01	3.0191E-04	0.0004	2.3614E+00	7.9477E-04	0.0003
4.7851E-05	1.7832E-08	0.0548	1.4264E-01	3.0324E-04	0.0004	2.3653E+00	7.9262E-04	0.0003
5.0569E-05	2.3080E-08	0.0482	1.4410E-01	3.1996E-04	0.0004	2.3693E+00	8.1110E-04	0.0003
5.3287E-05	2.1955E-08	0.0494	1.4557E-01	3.2354E-04	0.0004	2.3733E+00	8.0969E-04	0.0003
5.6006E-05	2.2598E-08	0.0487	1.4703E-01	3.2280E-04	0.0004	2.3772E+00	7.8794E-04	0.0003
5.8724E-05	2.3294E-08	0.0479	1.4850E-01	3.2640E-04	0.0004	2.3812E+00	8.0650E-04	0.0003
6.1442E-05	2.2384E-08	0.0489	1.4996E-01	3.2552E-04	0.0004	2.3852E+00	8.0459E-04	0.0003
6.4932E-05	3.0684E-08	0.0418	1.5150E-01	3.4504E-04	0.0004	2.4014E+00	3.2407E-03	0.0001
6.8422E-05	2.9345E-08	0.0427	1.5303E-01	3.4389E-04	0.0004	2.4175E+00	3.1930E-03	0.0001
7.1913E-05	2.8328E-08	0.0435	1.5457E-01	3.4784E-04	0.0004	2.4337E+00	3.1841E-03	0.0001
7.5403E-05	3.2612E-08	0.0405	1.5610E-01	3.4696E-04	0.0004	2.4498E+00	3.1381E-03	0.0001
7.8893E-05	3.1541E-08	0.0412	1.5764E-01	3.5086E-04	0.0004	2.4660E+00	3.1295E-03	0.0001
8.3374E-05	4.0698E-08	0.0363	1.5926E-01	3.7097E-04	0.0004	2.4913E+00	4.8303E-03	0.0001
8.7856E-05	3.9573E-08	0.0368	1.6088E-01	3.7232E-04	0.0004	2.5166E+00	4.7627E-03	0.0001
9.2337E-05	4.1180E-08	0.0361	1.6249E-01	3.7168E-04	0.0004	2.5418E+00	4.6776E-03	0.0001
9.6819E-05	4.0162E-08	0.0365	1.6411E-01	3.7556E-04	0.0004	2.5671E+00	4.6317E-03	0.0001
1.0130E-04	4.3750E-08	0.0350	1.6573E-01	3.7697E-04	0.0004	2.5924E+00	4.5648E-03	0.0001
1.0705E-04	5.3175E-08	0.0317	1.6743E-01	3.9741E-04	0.0004	2.6190E+00	4.7288E-03	0.0001
1.1281E-04	5.6763E-08	0.0307	1.6913E-01	3.9931E-04	0.0004	2.6456E+00	4.6584E-03	0.0001
1.1856E-04	5.6227E-08	0.0309	1.7082E-01	3.9849E-04	0.0004	2.6721E+00	4.5700E-03	0.0001
1.2432E-04	5.9601E-08	0.0300	1.7252E-01	4.0246E-04	0.0004	2.6987E+00	4.5174E-03	0.0001
1.3007E-04	5.6763E-08	0.0307	1.7422E-01	4.0390E-04	0.0004	2.7253E+00	4.4476E-03	0.0001
1.3746E-04	7.5398E-08	0.0267	1.7601E-01	4.2724E-04	0.0004	2.7533E+00	4.6092E-03	0.0001
1.4485E-04	7.9200E-08	0.0260	1.7780E-01	4.2895E-04	0.0004	2.7812E+00	4.5168E-03	0.0001
1.5224E-04	7.9040E-08	0.0260	1.7958E-01	4.2844E-04	0.0004	2.8092E+00	4.4582E-03	0.0001
1.5963E-04	8.1128E-08	0.0257	1.8137E-01	4.3254E-04	0.0004	2.8371E+00	4.3702E-03	0.0001
1.6702E-04	8.0271E-08	0.0258	1.8316E-01	4.3421E-04	0.0004	2.8651E+00	4.3141E-03	0.0001
1.7651E-04	1.1047E-07	0.0220	1.8504E-01	4.5786E-04	0.0003	2.8945E+00	4.4516E-03	0.0001
1.8599E-04	1.1160E-07	0.0219	1.8692E-01	4.5969E-04	0.0003	2.9238E+00	4.3588E-03	0.0001
1.9548E-04	1.0667E-07	0.0224	1.8879E-01	4.5905E-04	0.0003	2.9532E+00	4.2980E-03	0.0001
2.0496E-04	1.1369E-07	0.0217	1.9067E-01	4.6326E-04	0.0003	2.9825E+00	4.2070E-03	0.0001
2.1445E-04	1.1417E-07	0.0217	1.9255E-01	4.6450E-04	0.0003	3.0119E+00	4.1463E-03	0.0001
2.2663E-04	1.6044E-07	0.0183	1.9452E-01	4.8852E-04	0.0003	3.0428E+00	4.2786E-03	0.0001
2.3881E-04	1.5481E-07	0.0186	1.9650E-01	4.9306E-04	0.0003	3.0737E+00	4.1981E-03	0.0001
2.5100E-04	1.5144E-07	0.0188	1.9847E-01	4.9220E-04	0.0003	3.1046E+00	4.1183E-03	0.0001
2.6318E-04	1.6252E-07	0.0182	2.0045E-01	4.9688E-04	0.0003	3.1355E+00	4.0419E-03	0.0001
2.7536E-04	1.6445E-07	0.0180	2.0242E-01	4.9651E-04	0.0003	3.1664E+00	3.9655E-03	0.0001

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-1. Energy distribution of fission neutrons (cont)

Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error
2.9100E-04	2.0938E-07	0.0160	2.0450E-01	5.2677E-04	0.0003	3.1989E+00	4.0887E-03	0.0001
3.0664E-04	2.1597E-07	0.0157	2.0657E-01	5.2605E-04	0.0003	3.2313E+00	3.9944E-03	0.0001
3.2229E-04	2.2721E-07	0.0154	2.0865E-01	5.3106E-04	0.0003	3.2638E+00	3.9276E-03	0.0001
3.3793E-04	2.2694E-07	0.0154	2.1072E-01	5.3090E-04	0.0003	3.2962E+00	3.8353E-03	0.0001
3.5357E-04	2.2823E-07	0.0153	2.1280E-01	5.3583E-04	0.0003	3.3287E+00	3.7693E-03	0.0001
3.7366E-04	3.0786E-07	0.0132	2.1498E-01	5.6365E-04	0.0003	3.3987E+00	7.8612E-03	0.0001
3.9374E-04	3.0058E-07	0.0133	2.1716E-01	5.6624E-04	0.0003	3.4687E+00	7.5205E-03	0.0001
4.1383E-04	3.0866E-07	0.0132	2.1935E-01	5.7122E-04	0.0003	3.5388E+00	7.2050E-03	0.0001
4.3391E-04	3.1321E-07	0.0131	2.2153E-01	5.7066E-04	0.0003	3.6088E+00	6.8799E-03	0.0001
4.5400E-04	3.1744E-07	0.0130	2.2371E-01	5.7297E-04	0.0003	3.6788E+00	6.5772E-03	0.0001
4.7979E-04	4.1624E-07	0.0113	2.2600E-01	6.0465E-04	0.0003	3.7562E+00	6.9356E-03	0.0001
5.0558E-04	4.4061E-07	0.0110	2.2830E-01	6.0982E-04	0.0003	3.8336E+00	6.5973E-03	0.0001
5.3137E-04	4.3177E-07	0.0111	2.3059E-01	6.0943E-04	0.0003	3.9109E+00	6.2671E-03	0.0001
5.5716E-04	4.5255E-07	0.0109	2.3289E-01	6.1441E-04	0.0003	3.9883E+00	5.9680E-03	0.0001
5.8295E-04	4.4784E-07	0.0109	2.3518E-01	6.1436E-04	0.0003	4.0657E+00	5.6764E-03	0.0001
6.1606E-04	5.9671E-07	0.0095	2.3759E-01	6.4908E-04	0.0003	4.1512E+00	5.9442E-03	0.0001
6.4918E-04	5.9719E-07	0.0095	2.4000E-01	6.5111E-04	0.0003	4.2367E+00	5.6193E-03	0.0001
6.8229E-04	6.1989E-07	0.0093	2.4242E-01	6.5756E-04	0.0003	4.3223E+00	5.3195E-03	0.0001
7.1541E-04	6.2862E-07	0.0092	2.4483E-01	6.5711E-04	0.0003	4.4078E+00	5.0228E-03	0.0001
7.4852E-04	6.3874E-07	0.0092	2.4724E-01	6.5943E-04	0.0003	4.4933E+00	4.7483E-03	0.0001
7.9104E-04	8.3848E-07	0.0080	2.5244E-01	1.4323E-03	0.0002	4.5394E+00	2.4509E-03	0.0001
8.3356E-04	8.5974E-07	0.0079	2.5764E-01	1.4436E-03	0.0002	4.5855E+00	2.3776E-03	0.0001
8.7608E-04	8.8095E-07	0.0078	2.6284E-01	1.4548E-03	0.0002	4.6315E+00	2.3006E-03	0.0002
9.1860E-04	8.8181E-07	0.0078	2.6804E-01	1.4658E-03	0.0002	4.6776E+00	2.2368E-03	0.0002
9.6112E-04	9.1040E-07	0.0077	2.7324E-01	1.4760E-03	0.0002	4.7237E+00	2.1683E-03	0.0002
1.0157E-03	1.2002E-06	0.0067	2.7604E-01	7.9878E-04	0.0003	4.7721E+00	2.2060E-03	0.0002
1.0703E-03	1.2225E-06	0.0066	2.7884E-01	8.0201E-04	0.0003	4.8206E+00	2.1407E-03	0.0002
1.1249E-03	1.2565E-06	0.0065	2.8165E-01	8.0699E-04	0.0003	4.8690E+00	2.0687E-03	0.0002
1.1795E-03	1.2802E-06	0.0065	2.8445E-01	8.0625E-04	0.0003	4.9175E+00	2.0056E-03	0.0002
1.2341E-03	1.2964E-06	0.0064	2.8725E-01	8.0914E-04	0.0003	4.9659E+00	1.9382E-03	0.0002
1.3042E-03	1.7229E-06	0.0056	2.8870E-01	4.2008E-04	0.0004	5.0168E+00	1.9709E-03	0.0002
1.3743E-03	1.7629E-06	0.0055	2.9016E-01	4.2371E-04	0.0004	5.0677E+00	1.9058E-03	0.0002
1.4444E-03	1.7926E-06	0.0055	2.9161E-01	4.2127E-04	0.0004	5.1187E+00	1.8447E-03	0.0002
1.5145E-03	1.8292E-06	0.0054	2.9307E-01	4.2469E-04	0.0004	5.1696E+00	1.7789E-03	0.0002
1.5846E-03	1.8499E-06	0.0054	2.9452E-01	4.2271E-04	0.0004	5.2205E+00	1.7181E-03	0.0002
1.6746E-03	2.4327E-06	0.0047	2.9506E-01	1.5771E-04	0.0006	5.2740E+00	1.7438E-03	0.0002
1.7646E-03	2.5175E-06	0.0046	2.9560E-01	1.5758E-04	0.0006	5.3275E+00	1.6811E-03	0.0002
1.8547E-03	2.5586E-06	0.0046	2.9613E-01	1.5488E-04	0.0006	5.3811E+00	1.6248E-03	0.0002
1.9447E-03	2.6119E-06	0.0045	2.9667E-01	1.5801E-04	0.0006	5.4346E+00	1.5634E-03	0.0002
2.0347E-03	2.6574E-06	0.0045	2.9721E-01	1.5800E-04	0.0006	5.4881E+00	1.5070E-03	0.0002
2.0775E-03	1.3008E-06	0.0064	2.9747E-01	7.6126E-05	0.0008	5.5444E+00	1.5278E-03	0.0002
2.1203E-03	1.2910E-06	0.0064	2.9772E-01	7.3176E-05	0.0009	5.6007E+00	1.4705E-03	0.0002
2.1631E-03	1.3022E-06	0.0064	2.9798E-01	7.6298E-05	0.0008	5.6569E+00	1.4123E-03	0.0002
2.2059E-03	1.3248E-06	0.0064	2.9823E-01	7.3375E-05	0.0009	5.7132E+00	1.3608E-03	0.0002
2.2487E-03	1.3279E-06	0.0064	2.9849E-01	7.6158E-05	0.0008	5.7695E+00	1.3091E-03	0.0002
2.2960E-03	1.4927E-06	0.0060	2.9919E-01	2.0524E-04	0.0005	5.8287E+00	1.3220E-03	0.0002
2.3433E-03	1.4972E-06	0.0060	2.9988E-01	2.0278E-04	0.0005	5.8878E+00	1.2671E-03	0.0002
2.3906E-03	1.5044E-06	0.0060	3.0058E-01	2.0585E-04	0.0005	5.9470E+00	1.2176E-03	0.0002
2.4379E-03	1.5239E-06	0.0059	3.0127E-01	2.0279E-04	0.0005	6.0061E+00	1.1666E-03	0.0002
2.4852E-03	1.5369E-06	0.0059	3.0197E-01	2.0593E-04	0.0005	6.0653E+00	1.1216E-03	0.0002
2.5107E-03	8.3372E-07	0.0080	3.0832E-01	1.8763E-03	0.0002	6.1275E+00	1.1290E-03	0.0002
2.5362E-03	8.3752E-07	0.0080	3.1467E-01	1.8911E-03	0.0002	6.1897E+00	1.0814E-03	0.0002
2.5616E-03	8.4630E-07	0.0080	3.2103E-01	1.9080E-03	0.0002	6.2519E+00	1.0341E-03	0.0002

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-1. Energy distribution of fission neutrons (cont)

Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error
2.5871E-03	8.4887E-07	0.0079	3.2738E-01	1.9189E-03	0.0002	6.3141E+00	9.9020E-04	0.0002
2.6126E-03	8.4587E-07	0.0080	3.3373E-01	1.9307E-03	0.0002	6.3763E+00	9.4754E-04	0.0002
2.6394E-03	8.9626E-07	0.0077	3.4075E-01	2.1485E-03	0.0002	6.4195E+00	6.3417E-04	0.0003
2.6662E-03	8.8957E-07	0.0078	3.4777E-01	2.1610E-03	0.0002	6.4627E+00	6.1498E-04	0.0003
2.6929E-03	8.9648E-07	0.0077	3.5479E-01	2.1759E-03	0.0002	6.5060E+00	5.9771E-04	0.0003
2.7197E-03	9.2133E-07	0.0076	3.6181E-01	2.1908E-03	0.0002	6.5492E+00	5.7814E-04	0.0003
2.7465E-03	9.1276E-07	0.0077	3.6883E-01	2.2092E-03	0.0002	6.5924E+00	5.6027E-04	0.0003
2.8043E-03	1.9885E-06	0.0052	3.7261E-01	1.1966E-03	0.0002	6.6146E+00	2.8150E-04	0.0004
2.8621E-03	1.9942E-06	0.0052	3.7639E-01	1.2011E-03	0.0002	6.6367E+00	2.7560E-04	0.0004
2.9198E-03	2.0347E-06	0.0051	3.8018E-01	1.2083E-03	0.0002	6.6589E+00	2.7253E-04	0.0004
2.9776E-03	2.0271E-06	0.0051	3.8396E-01	1.2071E-03	0.0002	6.6810E+00	2.6699E-04	0.0004
3.0354E-03	2.0579E-06	0.0051	3.8774E-01	1.2104E-03	0.0002	6.7032E+00	2.6413E-04	0.0005
3.0992E-03	2.2956E-06	0.0048	3.9172E-01	1.2770E-03	0.0002	6.7719E+00	7.9092E-04	0.0003
3.1631E-03	2.2985E-06	0.0048	3.9569E-01	1.2767E-03	0.0002	6.8407E+00	7.5384E-04	0.0003
3.2269E-03	2.3255E-06	0.0048	3.9967E-01	1.2835E-03	0.0002	6.9094E+00	7.1632E-04	0.0003
3.2908E-03	2.3567E-06	0.0048	4.0364E-01	1.2817E-03	0.0002	6.9782E+00	6.8262E-04	0.0003
3.3546E-03	2.3754E-06	0.0047	4.0762E-01	1.2882E-03	0.0002	7.0469E+00	6.4853E-04	0.0003
3.4252E-03	2.6463E-06	0.0045	4.1619E-01	2.7842E-03	0.0001	7.1192E+00	6.4816E-04	0.0003
3.4957E-03	2.6586E-06	0.0045	4.2477E-01	2.8007E-03	0.0001	7.1914E+00	6.1419E-04	0.0003
3.5663E-03	2.6938E-06	0.0045	4.3334E-01	2.8109E-03	0.0001	7.2637E+00	5.8381E-04	0.0003
3.6368E-03	2.7204E-06	0.0044	4.4192E-01	2.8289E-03	0.0001	7.3359E+00	5.5257E-04	0.0003
3.7074E-03	2.7644E-06	0.0044	4.5049E-01	2.8387E-03	0.0001	7.4082E+00	5.2484E-04	0.0003
3.8274E-03	4.6902E-06	0.0034	4.5997E-01	3.1562E-03	0.0001	7.4842E+00	5.2233E-04	0.0003
3.9474E-03	4.7921E-06	0.0033	4.6944E-01	3.1702E-03	0.0001	7.5601E+00	4.9356E-04	0.0003
4.0674E-03	4.8708E-06	0.0033	4.7892E-01	3.1944E-03	0.0001	7.6361E+00	4.6730E-04	0.0003
4.1874E-03	4.9485E-06	0.0033	4.8839E-01	3.2042E-03	0.0001	7.7120E+00	4.4140E-04	0.0003
4.3074E-03	4.9916E-06	0.0033	4.9787E-01	3.2223E-03	0.0001	7.7880E+00	4.1776E-04	0.0004
4.5521E-03	1.0368E-05	0.0023	5.0298E-01	1.7414E-03	0.0002	7.8679E+00	4.1447E-04	0.0004
4.7968E-03	1.0601E-05	0.0022	5.0808E-01	1.7413E-03	0.0002	7.9477E+00	3.8997E-04	0.0004
5.0414E-03	1.0880E-05	0.0022	5.1319E-01	1.7458E-03	0.0002	8.0276E+00	3.6835E-04	0.0004
5.2861E-03	1.1080E-05	0.0022	5.1829E-01	1.7442E-03	0.0002	8.1074E+00	3.4672E-04	0.0004
5.5308E-03	1.1379E-05	0.0022	5.2340E-01	1.7496E-03	0.0002	8.1873E+00	3.2696E-04	0.0004
5.8450E-03	1.4930E-05	0.0019	5.2877E-01	1.8416E-03	0.0002	8.2713E+00	3.2348E-04	0.0004
6.1592E-03	1.5293E-05	0.0019	5.3413E-01	1.8398E-03	0.0002	8.3552E+00	3.0346E-04	0.0004
6.4733E-03	1.5672E-05	0.0018	5.3950E-01	1.8466E-03	0.0002	8.4392E+00	2.8540E-04	0.0004
6.7875E-03	1.6052E-05	0.0018	5.4486E-01	1.8451E-03	0.0002	8.5231E+00	2.6769E-04	0.0004
7.1017E-03	1.6334E-05	0.0018	5.5023E-01	1.8520E-03	0.0002	8.6071E+00	2.5167E-04	0.0005
7.5051E-03	2.1550E-05	0.0016	5.5587E-01	1.9470E-03	0.0002	8.6954E+00	2.4800E-04	0.0005
7.9085E-03	2.2075E-05	0.0016	5.6151E-01	1.9501E-03	0.0002	8.7836E+00	2.3169E-04	0.0005
8.3120E-03	2.2617E-05	0.0015	5.6716E-01	1.9560E-03	0.0002	8.8719E+00	2.1700E-04	0.0005
8.7154E-03	2.3107E-05	0.0015	5.7280E-01	1.9552E-03	0.0002	8.9601E+00	2.0316E-04	0.0005
9.1188E-03	2.3552E-05	0.0015	5.7844E-01	1.9572E-03	0.0002	9.0484E+00	1.9035E-04	0.0005
9.4140E-03	1.7606E-05	0.0017	5.8437E-01	2.0604E-03	0.0002	9.1412E+00	1.8686E-04	0.0005
9.7093E-03	1.7985E-05	0.0017	5.9030E-01	2.0631E-03	0.0002	9.2340E+00	1.7420E-04	0.0006
1.0005E-02	1.8186E-05	0.0017	5.9624E-01	2.0670E-03	0.0002	9.3267E+00	1.6226E-04	0.0006
1.0300E-02	1.9599E-05	0.0017	6.0217E-01	2.0658E-03	0.0002	9.4195E+00	1.5138E-04	0.0006
1.0595E-02	1.9876E-05	0.0016	6.0810E-01	2.0684E-03	0.0002	9.5123E+00	1.4124E-04	0.0006
1.0818E-02	1.5180E-05	0.0019	6.1434E-01	2.1774E-03	0.0002	9.6098E+00	1.3831E-04	0.0006
1.1041E-02	1.5275E-05	0.0019	6.2057E-01	2.1754E-03	0.0002	9.7074E+00	1.2849E-04	0.0006
1.1263E-02	1.5446E-05	0.0019	6.2681E-01	2.1783E-03	0.0002	9.8049E+00	1.1922E-04	0.0007
1.1486E-02	1.5549E-05	0.0019	6.3304E-01	2.1760E-03	0.0002	9.9025E+00	1.1089E-04	0.0007
1.1709E-02	1.5733E-05	0.0018	6.3928E-01	2.1803E-03	0.0002	1.0000E+01	1.0336E-04	0.0007
1.2374E-02	4.7700E-05	0.0011	6.4584E-01	2.2917E-03	0.0002	1.0103E+01	1.0072E-04	0.0007

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-1. Energy distribution of fission neutrons (cont)

Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error
1.3039E-02	4.8856E-05	0.0010	6.5239E-01	2.2895E-03	0.0002	1.0205E+01	9.2265E-05	0.0008
1.3704E-02	4.9936E-05	0.0010	6.5895E-01	2.2945E-03	0.0002	1.0308E+01	8.6251E-05	0.0008
1.4369E-02	5.1091E-05	0.0010	6.6550E-01	2.2926E-03	0.0002	1.0410E+01	7.9014E-05	0.0008
1.5034E-02	5.2132E-05	0.0010	6.7206E-01	2.2969E-03	0.0002	1.0513E+01	7.3831E-05	0.0009
1.5888E-02	6.8303E-05	0.0009	6.7895E-01	2.4135E-03	0.0001	1.0621E+01	7.1377E-05	0.0009
1.6742E-02	7.0004E-05	0.0009	6.8584E-01	2.4131E-03	0.0001	1.0729E+01	6.5802E-05	0.0009
1.7597E-02	7.1723E-05	0.0009	6.9273E-01	2.4139E-03	0.0001	1.0836E+01	6.0142E-05	0.0009
1.8451E-02	7.3116E-05	0.0009	6.9962E-01	2.4145E-03	0.0001	1.0944E+01	5.5964E-05	0.0010
1.9305E-02	7.4839E-05	0.0008	7.0651E-01	2.4147E-03	0.0001	1.1052E+01	5.1509E-05	0.0010
1.9819E-02	4.5718E-05	0.0011	7.1376E-01	2.5402E-03	0.0001	1.1165E+01	4.9558E-05	0.0010
2.0333E-02	4.5878E-05	0.0011	7.2100E-01	2.5369E-03	0.0001	1.1278E+01	4.5373E-05	0.0011
2.0847E-02	4.6290E-05	0.0011	7.2825E-01	2.5414E-03	0.0001	1.1392E+01	4.1991E-05	0.0011
2.1361E-02	4.6759E-05	0.0011	7.3549E-01	2.5393E-03	0.0001	1.1505E+01	3.8191E-05	0.0012
2.1875E-02	4.7178E-05	0.0011	7.4274E-01	2.5430E-03	0.0001	1.1618E+01	3.5026E-05	0.0012
2.2216E-02	3.1673E-05	0.0013	7.5036E-01	2.6733E-03	0.0001	1.1737E+01	3.3831E-05	0.0013
2.2557E-02	3.1788E-05	0.0013	7.5797E-01	2.6675E-03	0.0001	1.1856E+01	3.0866E-05	0.0013
2.2897E-02	3.1919E-05	0.0013	7.6559E-01	2.6709E-03	0.0001	1.1976E+01	2.8344E-05	0.0014
2.3238E-02	3.2316E-05	0.0013	7.7320E-01	2.6667E-03	0.0001	1.2095E+01	2.5664E-05	0.0014
2.3579E-02	3.2435E-05	0.0013	7.8082E-01	2.6697E-03	0.0001	1.2214E+01	2.3404E-05	0.0015
2.3698E-02	1.1385E-05	0.0022	7.8883E-01	2.8026E-03	0.0001	1.2276E+01	1.1362E-05	0.0022
2.3818E-02	1.1475E-05	0.0022	7.9683E-01	2.7969E-03	0.0001	1.2338E+01	1.0821E-05	0.0022
2.3937E-02	1.1380E-05	0.0022	8.0484E-01	2.7975E-03	0.0001	1.2399E+01	1.0168E-05	0.0023
2.4057E-02	1.1603E-05	0.0021	8.1284E-01	2.7922E-03	0.0001	1.2461E+01	9.8709E-06	0.0023
2.4176E-02	1.1486E-05	0.0022	8.2085E-01	2.7933E-03	0.0001	1.2523E+01	9.4081E-06	0.0024
2.4298E-02	1.1779E-05	0.0021	8.2927E-01	2.9342E-03	0.0001	1.2586E+01	9.0911E-06	0.0024
2.4421E-02	1.1966E-05	0.0021	8.3769E-01	2.9322E-03	0.0001	1.2650E+01	8.8002E-06	0.0025
2.4543E-02	1.1845E-05	0.0021	8.4610E-01	2.9290E-03	0.0001	1.2713E+01	8.2484E-06	0.0025
2.4666E-02	1.1898E-05	0.0021	8.5452E-01	2.9321E-03	0.0001	1.2777E+01	8.0440E-06	0.0026
2.4788E-02	1.1953E-05	0.0021	8.6294E-01	2.9285E-03	0.0001	1.2840E+01	7.4536E-06	0.0027
2.5042E-02	2.4940E-05	0.0015	8.7179E-01	3.0716E-03	0.0001	1.2972E+01	1.4577E-05	0.0019
2.5296E-02	2.5047E-05	0.0015	8.8064E-01	3.0675E-03	0.0001	1.3104E+01	1.3153E-05	0.0020
2.5550E-02	2.5119E-05	0.0015	8.8948E-01	3.0624E-03	0.0001	1.3235E+01	1.1780E-05	0.0021
2.5804E-02	2.5215E-05	0.0015	8.9833E-01	3.0620E-03	0.0001	1.3367E+01	1.0700E-05	0.0022
2.6058E-02	2.5392E-05	0.0015	9.0718E-01	3.0588E-03	0.0001	1.3499E+01	9.6200E-06	0.0024
2.6246E-02	1.8853E-05	0.0017	9.1807E-01	3.7622E-03	0.0001	1.3567E+01	4.6249E-06	0.0034
2.6435E-02	1.9022E-05	0.0017	9.2896E-01	3.7552E-03	0.0001	1.3635E+01	4.3827E-06	0.0035
2.6623E-02	1.9051E-05	0.0017	9.3986E-01	3.7517E-03	0.0001	1.3704E+01	4.2082E-06	0.0036
2.6812E-02	1.9202E-05	0.0017	9.5075E-01	3.7444E-03	0.0001	1.3772E+01	3.9392E-06	0.0037
2.7000E-02	1.9055E-05	0.0017	9.6164E-01	3.7394E-03	0.0001	1.3840E+01	3.7393E-06	0.0038
2.7300E-02	3.0579E-05	0.0013	9.6983E-01	2.8059E-03	0.0001	1.3910E+01	3.6279E-06	0.0038
2.7600E-02	3.0718E-05	0.0013	9.7802E-01	2.8039E-03	0.0001	1.3980E+01	3.4658E-06	0.0039
2.7901E-02	3.0935E-05	0.0013	9.8622E-01	2.8025E-03	0.0001	1.4051E+01	3.3136E-06	0.0040
2.8201E-02	3.1084E-05	0.0013	9.9441E-01	2.7944E-03	0.0001	1.4121E+01	3.0861E-06	0.0042
2.8501E-02	3.1250E-05	0.0013	1.0026E+00	2.8063E-03	0.0001	1.4191E+01	2.9056E-06	0.0043
2.9166E-02	6.9664E-05	0.0009	1.0237E+00	7.1698E-03	0.0001	1.4263E+01	2.8511E-06	0.0043
2.9832E-02	7.0492E-05	0.0009	1.0448E+00	7.1378E-03	0.0001	1.4335E+01	2.6896E-06	0.0045
3.0497E-02	7.0701E-05	0.0009	1.0658E+00	7.0709E-03	0.0001	1.4406E+01	2.5194E-06	0.0046
3.1163E-02	7.1416E-05	0.0009	1.0869E+00	7.0719E-03	0.0001	1.4478E+01	2.4012E-06	0.0047
3.1828E-02	7.2016E-05	0.0009	1.1080E+00	7.0417E-03	0.0001	1.4550E+01	2.2718E-06	0.0049
3.2324E-02	5.4251E-05	0.0010	1.1194E+00	3.7912E-03	0.0001	1.4624E+01	2.2087E-06	0.0049
3.2820E-02	5.4574E-05	0.0010	1.1307E+00	3.7496E-03	0.0001	1.4697E+01	2.0449E-06	0.0051
3.3315E-02	5.4758E-05	0.0010	1.1421E+00	3.7749E-03	0.0001	1.4771E+01	1.9702E-06	0.0052
3.3811E-02	5.5329E-05	0.0010	1.1534E+00	3.7327E-03	0.0001	1.4844E+01	1.8374E-06	0.0054

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-1. Energy distribution of fission neutrons (cont)

Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error	Group upper energy (MeV)	Group probability	Rel. error
3.4307E-02	5.5684E-05	0.0010	1.1648E+00	3.7534E-03	0.0001	1.4918E+01	1.7514E-06	0.0055
3.5619E-02	1.4904E-04	0.0006	1.1768E+00	3.9388E-03	0.0001	1.5071E+01	3.2944E-06	0.0040
3.6931E-02	1.5167E-04	0.0006	1.1887E+00	3.8958E-03	0.0001	1.5224E+01	2.9413E-06	0.0043
3.8244E-02	1.5450E-04	0.0006	1.2007E+00	3.9149E-03	0.0001	1.5377E+01	2.6061E-06	0.0045
3.9556E-02	1.5670E-04	0.0006	1.2126E+00	3.8721E-03	0.0001	1.5530E+01	2.3357E-06	0.0048
4.0868E-02	1.5958E-04	0.0006	1.2246E+00	3.8882E-03	0.0001	1.5683E+01	2.0263E-06	0.0051
4.1956E-02	1.3420E-04	0.0006	1.2372E+00	4.0693E-03	0.0001	1.5844E+01	1.8988E-06	0.0053
4.3044E-02	1.3606E-04	0.0006	1.2497E+00	4.0223E-03	0.0001	1.6005E+01	1.6642E-06	0.0057
4.4133E-02	1.3768E-04	0.0006	1.2623E+00	4.0419E-03	0.0001	1.6165E+01	1.4798E-06	0.0060
4.5221E-02	1.3922E-04	0.0006	1.2748E+00	3.9953E-03	0.0001	1.6326E+01	1.2991E-06	0.0064
4.6309E-02	1.4059E-04	0.0006	1.2874E+00	4.0126E-03	0.0001	1.6487E+01	1.1390E-06	0.0069
4.7542E-02	1.6103E-04	0.0006	1.3006E+00	4.1896E-03	0.0001	1.6571E+01	5.3785E-07	0.0100
4.8775E-02	1.6304E-04	0.0006	1.3138E+00	4.1737E-03	0.0001	1.6654E+01	4.9764E-07	0.0104
5.0009E-02	1.6527E-04	0.0006	1.3270E+00	4.1567E-03	0.0001	1.6738E+01	4.7868E-07	0.0106
5.1242E-02	1.6704E-04	0.0006	1.3402E+00	4.1421E-03	0.0001	1.6821E+01	4.3258E-07	0.0111
5.2475E-02	1.6898E-04	0.0006	1.3534E+00	4.1261E-03	0.0001	1.6905E+01	4.1897E-07	0.0113
5.3292E-02	1.1303E-04	0.0007	1.3673E+00	4.3282E-03	0.0001	1.6990E+01	3.9391E-07	0.0117
5.4110E-02	1.1389E-04	0.0007	1.3811E+00	4.2791E-03	0.0001	1.7076E+01	3.7517E-07	0.0119
5.4927E-02	1.1444E-04	0.0007	1.3950E+00	4.2935E-03	0.0001	1.7161E+01	3.3924E-07	0.0126
5.5745E-02	1.1547E-04	0.0007	1.4088E+00	4.2442E-03	0.0001	1.7247E+01	3.2205E-07	0.0129
5.6562E-02	1.1620E-04	0.0007	1.4227E+00	4.2568E-03	0.0001	1.7332E+01	2.9345E-07	0.0135
5.8725E-02	3.1118E-04	0.0004	1.4373E+00	4.4495E-03	0.0001	1.7794E+01	1.3146E-06	0.0064
6.0889E-02	3.1704E-04	0.0004	1.4519E+00	4.4294E-03	0.0001	1.8255E+01	9.1324E-07	0.0077
6.3052E-02	3.2228E-04	0.0004	1.4665E+00	4.4082E-03	0.0001	1.8717E+01	6.2412E-07	0.0093
6.5216E-02	3.2768E-04	0.0004	1.4811E+00	4.3868E-03	0.0001	1.9178E+01	4.3306E-07	0.0111
6.7379E-02	3.3260E-04	0.0004	1.4957E+00	4.3644E-03	0.0001	1.9640E+01	3.0138E-07	0.0133
6.8303E-02	1.4355E-04	0.0006	1.5110E+00	4.5505E-03	0.0001	1.9712E+01	3.9306E-08	0.0369
6.9227E-02	1.4451E-04	0.0006	1.5264E+00	4.5567E-03	0.0001	1.9784E+01	3.7860E-08	0.0376
7.0150E-02	1.4533E-04	0.0006	1.5417E+00	4.5032E-03	0.0001	1.9856E+01	3.6789E-08	0.0382
7.1074E-02	1.4698E-04	0.0006	1.5571E+00	4.5076E-03	0.0001	1.9928E+01	3.0577E-08	0.0418
7.1998E-02	1.4779E-04	0.0006	1.5724E+00	4.4559E-03	0.0001	2.0000E+01	2.8810E-08	0.0431
7.3498E-02	2.4192E-04	0.0005	1.5885E+00	4.6607E-03	0.0001	2.2000E+01	3.8743E-07	0.0118
7.4998E-02	2.4414E-04	0.0005	1.6046E+00	4.6348E-03	0.0001	2.4000E+01	7.5987E-08	0.0265
7.6499E-02	2.4651E-04	0.0005	1.6208E+00	4.6360E-03	0.0001	2.6000E+01	1.4726E-08	0.0603
7.7999E-02	2.4867E-04	0.0005	1.6369E+00	4.5805E-03	0.0001	2.8000E+01	2.9452E-09	0.1348
7.9499E-02	2.5083E-04	0.0005	1.6530E+00	4.5536E-03	0.0001	3.0000E+01	1.2316E-09	0.2085

ALARM-TRAN-AIR-SHIELD-001

The spatial distributions of the source were created from a mesh tally in an MCNP eigenvalue simulation of the benchmark. This same distribution could have been constructed from the PTRAC data used to create the energy distribution, but the data in Tables C-2 and C-3 actually come from a mesh tally. The mesh tally used a cylindrical geometry that perfectly covered the fuel solution, and has a single cell in theta (azimuthal direction). In each cell of the mesh tally the fission neutron production rate per unit volume was tallied, i.e., $\phi * \Sigma_{fission} * v$. One will notice in the following tables that the volume of each cell of the mesh tally is exactly the same, so when this mesh tally is normalized to make a distribution the result is the same if the tally is per unit volume or not. The axial distribution was calculated by integrating over the radial direction at each axial layer in the mesh tally. Note two results of this method. First, the spatial distribution has been discretized, but it contains contributions from all fissionable isotopes in the fuel solution in the correct proportions. Second, since only a single mesh in the theta direction was used, so the source is azimuthally symmetric.

Next in Table C-2 is the axial distribution of fission neutrons plotted in Fig. 4-2.

Table C-2. Axial distribution of fission neutrons

Axial layer upper boundary (cm)	Layer probability	Rel. error	Axial layer upper boundary (cm)	Layer probability	Rel. error	Axial layer upper boundary (cm)	Layer probability	Rel. error
100 (minimum boundary)								
100.498	3.3012E-03	0.00012	114.455	1.5479E-02	0.00006	128.412	1.4222E-02	0.00007
100.997	4.6473E-03	0.00011	114.954	1.5648E-02	0.00006	128.911	1.3955E-02	0.00007
101.495	5.6372E-03	0.00010	115.452	1.5800E-02	0.00006	129.409	1.3670E-02	0.00007
101.994	6.4353E-03	0.00010	115.951	1.5937E-02	0.00006	129.908	1.3372E-02	0.00007
102.492	7.1096E-03	0.00009	116.449	1.6060E-02	0.00006	130.406	1.3060E-02	0.00007
102.991	7.7036E-03	0.00009	116.948	1.6163E-02	0.00006	130.905	1.2732E-02	0.00007
103.489	8.2378E-03	0.00009	117.446	1.6252E-02	0.00006	131.403	1.2395E-02	0.00007
103.988	8.7345E-03	0.00009	117.945	1.6327E-02	0.00006	131.902	1.2045E-02	0.00007
104.486	9.2005E-03	0.00008	118.443	1.6386E-02	0.00006	132.400	1.1683E-02	0.00007
104.985	9.6440E-03	0.00008	118.942	1.6428E-02	0.00006	132.899	1.1307E-02	0.00008
105.483	1.0070E-02	0.00008	119.440	1.6455E-02	0.00006	133.397	1.0920E-02	0.00008
105.982	1.0478E-02	0.00008	119.939	1.6467E-02	0.00006	133.896	1.0517E-02	0.00008
106.480	1.0876E-02	0.00008	120.437	1.6463E-02	0.00006	134.394	1.0101E-02	0.00008
106.979	1.1263E-02	0.00008	120.936	1.6440E-02	0.00006	134.893	9.6727E-03	0.00008
107.477	1.1634E-02	0.00007	121.434	1.6405E-02	0.00006	135.391	9.2328E-03	0.00008
107.975	1.1994E-02	0.00007	121.932	1.6349E-02	0.00006	135.889	8.7803E-03	0.00009
108.474	1.2343E-02	0.00007	122.431	1.6277E-02	0.00006	136.388	8.3131E-03	0.00009
108.972	1.2678E-02	0.00007	122.929	1.6192E-02	0.00006	136.886	7.8319E-03	0.00009
109.471	1.3001E-02	0.00007	123.428	1.6093E-02	0.00006	137.385	7.3332E-03	0.00009
109.969	1.3312E-02	0.00007	123.926	1.5972E-02	0.00006	137.883	6.8164E-03	0.00010
110.468	1.3607E-02	0.00007	124.425	1.5838E-02	0.00006	138.382	6.2823E-03	0.00010
110.966	1.3890E-02	0.00007	124.923	1.5686E-02	0.00006	138.880	5.7279E-03	0.00011
111.465	1.4160E-02	0.00007	125.422	1.5526E-02	0.00006	139.379	5.1463E-03	0.00011
111.963	1.4417E-02	0.00007	125.920	1.5347E-02	0.00006	139.877	4.5301E-03	0.00012
112.462	1.4658E-02	0.00007	126.419	1.5150E-02	0.00006	140.376	3.8687E-03	0.00013
112.960	1.4887E-02	0.00007	126.917	1.4942E-02	0.00007	140.874	3.1511E-03	0.00014
113.459	1.5099E-02	0.00007	127.416	1.4714E-02	0.00007	141.373	2.3525E-03	0.00016
113.957	1.5296E-02	0.00006	127.914	1.4474E-02	0.00007	141.871	1.3965E-03	0.00019

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3 presents the radial distributions (one per axial layer). Figure 4-3 plots three of these distributions for comparison purposes.

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
3.8 (minimum boundary)			z=100.000			to z=100.498		
4.4270	2.5994E-02	0.0009	11.0810	2.1084E-02	0.0008	15.0320	1.2437E-02	0.0010
4.9760	2.6928E-02	0.0009	11.3110	2.0685E-02	0.0008	15.2030	1.1981E-02	0.0010
5.4700	2.7171E-02	0.0009	11.5370	2.0258E-02	0.0008	15.3720	1.1530E-02	0.0010
5.9230	2.7192E-02	0.0009	11.7590	1.9828E-02	0.0008	15.5390	1.1087E-02	0.0010
6.3430	2.7046E-02	0.0009	11.9760	1.9402E-02	0.0008	15.7040	1.0653E-02	0.0010
6.7380	2.6827E-02	0.0008	12.1890	1.8956E-02	0.0008	15.8670	1.0219E-02	0.0010
7.1100	2.6582E-02	0.0008	12.3990	1.8528E-02	0.0008	16.0290	9.7645E-03	0.0011
7.4640	2.6253E-02	0.0008	12.6060	1.8100E-02	0.0008	16.1890	9.3144E-03	0.0011
7.8020	2.5914E-02	0.0008	12.8090	1.7669E-02	0.0009	16.3480	8.8596E-03	0.0011
8.1260	2.5597E-02	0.0008	13.0080	1.7227E-02	0.0009	16.5050	8.3834E-03	0.0011
8.4380	2.5233E-02	0.0008	13.2050	1.6799E-02	0.0009	16.6600	7.9115E-03	0.0012
8.7380	2.4828E-02	0.0008	13.3990	1.6377E-02	0.0009	16.8140	7.4424E-03	0.0012
9.0280	2.4442E-02	0.0008	13.5900	1.5949E-02	0.0009	16.9670	6.9561E-03	0.0012
9.3100	2.4059E-02	0.0008	13.7790	1.5493E-02	0.0009	17.1190	6.4634E-03	0.0013
9.5830	2.3640E-02	0.0008	13.9650	1.5078E-02	0.0009	17.2690	5.9444E-03	0.0013
9.8480	2.3220E-02	0.0008	14.1480	1.4631E-02	0.0009	17.4170	5.4159E-03	0.0014
10.1070	2.2804E-02	0.0008	14.3300	1.4202E-02	0.0009	17.5650	4.8752E-03	0.0014
10.3590	2.2404E-02	0.0008	14.5080	1.3750E-02	0.0009	17.7110	4.2929E-03	0.0015
10.6050	2.1969E-02	0.0008	14.6850	1.3314E-02	0.0009	17.8560	3.6734E-03	0.0015
10.8460	2.1523E-02	0.0008	14.8600	1.2864E-02	0.0009	18.0000	2.9783E-03	0.0015
3.8 (minimum boundary)			z=100.498			to z=100.997		
4.4270	2.3953E-02	0.0009	11.0810	2.1230E-02	0.0008	15.0320	1.2518E-02	0.0009
4.9760	2.6089E-02	0.0009	11.3110	2.0805E-02	0.0008	15.2030	1.2078E-02	0.0009
5.4700	2.6806E-02	0.0008	11.5370	2.0380E-02	0.0008	15.3720	1.1620E-02	0.0009
5.9230	2.7016E-02	0.0008	11.7590	1.9963E-02	0.0008	15.5390	1.1172E-02	0.0009
6.3430	2.6982E-02	0.0008	11.9760	1.9531E-02	0.0008	15.7040	1.0705E-02	0.0009
6.7380	2.6854E-02	0.0008	12.1890	1.9087E-02	0.0008	15.8670	1.0270E-02	0.0009
7.1100	2.6640E-02	0.0008	12.3990	1.8636E-02	0.0008	16.0290	9.8165E-03	0.0010
7.4640	2.6340E-02	0.0008	12.6060	1.8209E-02	0.0008	16.1890	9.3408E-03	0.0010
7.8020	2.6011E-02	0.0008	12.8090	1.7774E-02	0.0008	16.3480	8.8650E-03	0.0010
8.1260	2.5699E-02	0.0008	13.0080	1.7349E-02	0.0008	16.5050	8.4061E-03	0.0010
8.4380	2.5332E-02	0.0008	13.2050	1.6919E-02	0.0008	16.6600	7.9199E-03	0.0011
8.7380	2.4971E-02	0.0008	13.3990	1.6498E-02	0.0008	16.8140	7.4331E-03	0.0011
9.0280	2.4577E-02	0.0008	13.5900	1.6048E-02	0.0008	16.9670	6.9307E-03	0.0011
9.3100	2.4156E-02	0.0008	13.7790	1.5594E-02	0.0008	17.1190	6.4173E-03	0.0012
9.5830	2.3738E-02	0.0008	13.9650	1.5156E-02	0.0008	17.2690	5.8922E-03	0.0012
9.8480	2.3314E-02	0.0008	14.1480	1.4734E-02	0.0008	17.4170	5.3382E-03	0.0013
10.1070	2.2919E-02	0.0008	14.3300	1.4290E-02	0.0008	17.5650	4.7543E-03	0.0013
10.3590	2.2513E-02	0.0008	14.5080	1.3858E-02	0.0008	17.7110	4.1531E-03	0.0014
10.6050	2.2091E-02	0.0008	14.6850	1.3397E-02	0.0009	17.8560	3.5050E-03	0.0014
10.8460	2.1669E-02	0.0008	14.8600	1.2968E-02	0.0009	18.0000	2.7659E-03	0.0014
3.8 (minimum boundary)			z=100.997			to z=101.495		
4.4270	2.2855E-02	0.0008	11.0810	2.1308E-02	0.0007	15.0320	1.2560E-02	0.0008
4.9760	2.5543E-02	0.0008	11.3110	2.0892E-02	0.0007	15.2030	1.2107E-02	0.0008
5.4700	2.6472E-02	0.0008	11.5370	2.0456E-02	0.0007	15.3720	1.1655E-02	0.0008
5.9230	2.6872E-02	0.0008	11.7590	2.0026E-02	0.0007	15.5390	1.1205E-02	0.0008
6.3430	2.6919E-02	0.0007	11.9760	1.9604E-02	0.0007	15.7040	1.0746E-02	0.0009
6.7380	2.6851E-02	0.0007	12.1890	1.9174E-02	0.0007	15.8670	1.0295E-02	0.0009

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
7.1100	2.6626E-02	0.0007	12.3990	1.8740E-02	0.0007	16.0290	9.8383E-03	0.0009
7.4640	2.6376E-02	0.0007	12.6060	1.8285E-02	0.0007	16.1890	9.3685E-03	0.0009
7.8020	2.6072E-02	0.0007	12.8090	1.7865E-02	0.0007	16.3480	8.8976E-03	0.0009
8.1260	2.5759E-02	0.0007	13.0080	1.7431E-02	0.0007	16.5050	8.4085E-03	0.0010
8.4380	2.5421E-02	0.0007	13.2050	1.6987E-02	0.0007	16.6600	7.9166E-03	0.0010
8.7380	2.5038E-02	0.0007	13.3990	1.6549E-02	0.0007	16.8140	7.4196E-03	0.0010
9.0280	2.4646E-02	0.0007	13.5900	1.6106E-02	0.0008	16.9670	6.8996E-03	0.0010
9.3100	2.4217E-02	0.0007	13.7790	1.5667E-02	0.0008	17.1190	6.3836E-03	0.0011
9.5830	2.3816E-02	0.0007	13.9650	1.5228E-02	0.0008	17.2690	5.8482E-03	0.0011
9.8480	2.3429E-02	0.0007	14.1480	1.4782E-02	0.0008	17.4170	5.2862E-03	0.0012
10.1070	2.3030E-02	0.0007	14.3300	1.4345E-02	0.0008	17.5650	4.6979E-03	0.0012
10.3590	2.2593E-02	0.0007	14.5080	1.3909E-02	0.0008	17.7110	4.0797E-03	0.0013
10.6050	2.2157E-02	0.0007	14.6850	1.3464E-02	0.0008	17.8560	3.4222E-03	0.0013
10.8460	2.1760E-02	0.0007	14.8600	1.3011E-02	0.0008	18.0000	2.6872E-03	0.0014
3.8 (minimum boundary)			z=101.495			to z=101.994		
4.4270	2.2267E-02	0.0008	11.0810	2.1386E-02	0.0007	15.0320	1.2591E-02	0.0008
4.9760	2.5167E-02	0.0008	11.3110	2.0942E-02	0.0007	15.2030	1.2140E-02	0.0008
5.4700	2.6266E-02	0.0007	11.5370	2.0501E-02	0.0007	15.3720	1.1690E-02	0.0008
5.9230	2.6720E-02	0.0007	11.7590	2.0073E-02	0.0007	15.5390	1.1234E-02	0.0008
6.3430	2.6868E-02	0.0007	11.9760	1.9649E-02	0.0007	15.7040	1.0778E-02	0.0008
6.7380	2.6784E-02	0.0007	12.1890	1.9221E-02	0.0007	15.8670	1.0323E-02	0.0008
7.1100	2.6609E-02	0.0007	12.3990	1.8796E-02	0.0007	16.0290	9.8444E-03	0.0008
7.4640	2.6370E-02	0.0007	12.6060	1.8346E-02	0.0007	16.1890	9.3732E-03	0.0009
7.8020	2.6119E-02	0.0007	12.8090	1.7902E-02	0.0007	16.3480	8.8805E-03	0.0009
8.1260	2.5784E-02	0.0007	13.0080	1.7474E-02	0.0007	16.5050	8.3907E-03	0.0009
8.4380	2.5437E-02	0.0007	13.2050	1.7042E-02	0.0007	16.6600	7.8975E-03	0.0009
8.7380	2.5085E-02	0.0007	13.3990	1.6618E-02	0.0007	16.8140	7.3983E-03	0.0010
9.0280	2.4694E-02	0.0007	13.5900	1.6164E-02	0.0007	16.9670	6.8921E-03	0.0010
9.3100	2.4290E-02	0.0006	13.7790	1.5719E-02	0.0007	17.1190	6.3551E-03	0.0010
9.5830	2.3890E-02	0.0006	13.9650	1.5271E-02	0.0007	17.2690	5.8136E-03	0.0011
9.8480	2.3462E-02	0.0006	14.1480	1.4830E-02	0.0007	17.4170	5.2533E-03	0.0011
10.1070	2.3087E-02	0.0006	14.3300	1.4380E-02	0.0007	17.5650	4.6639E-03	0.0011
10.3590	2.2660E-02	0.0006	14.5080	1.3943E-02	0.0007	17.7110	4.0410E-03	0.0012
10.6050	2.2247E-02	0.0006	14.6850	1.3488E-02	0.0008	17.8560	3.3832E-03	0.0013
10.8460	2.1822E-02	0.0007	14.8600	1.3044E-02	0.0008	18.0000	2.6399E-03	0.0013
3.8 (minimum boundary)			z=101.994			to z=102.492		
4.4270	2.1914E-02	0.0008	11.0810	2.1448E-02	0.0006	15.0320	1.2624E-02	0.0007
4.9760	2.4922E-02	0.0007	11.3110	2.1000E-02	0.0006	15.2030	1.2169E-02	0.0008
5.4700	2.6104E-02	0.0007	11.5370	2.0550E-02	0.0006	15.3720	1.1698E-02	0.0008
5.9230	2.6605E-02	0.0007	11.7590	2.0115E-02	0.0006	15.5390	1.1247E-02	0.0008
6.3430	2.6772E-02	0.0007	11.9760	1.9676E-02	0.0006	15.7040	1.0779E-02	0.0008
6.7380	2.6760E-02	0.0007	12.1890	1.9259E-02	0.0006	15.8670	1.0317E-02	0.0008
7.1100	2.6598E-02	0.0006	12.3990	1.8827E-02	0.0006	16.0290	9.8323E-03	0.0008
7.4640	2.6384E-02	0.0006	12.6060	1.8386E-02	0.0006	16.1890	9.3632E-03	0.0008
7.8020	2.6136E-02	0.0006	12.8090	1.7946E-02	0.0006	16.3480	8.8686E-03	0.0008
8.1260	2.5813E-02	0.0006	13.0080	1.7503E-02	0.0007	16.5050	8.3838E-03	0.0009
8.4380	2.5455E-02	0.0006	13.2050	1.7068E-02	0.0007	16.6600	7.8985E-03	0.0009
8.7380	2.5100E-02	0.0006	13.3990	1.6632E-02	0.0007	16.8140	7.3829E-03	0.0009
9.0280	2.4739E-02	0.0006	13.5900	1.6189E-02	0.0007	16.9670	6.8615E-03	0.0009
9.3100	2.4323E-02	0.0006	13.7790	1.5741E-02	0.0007	17.1190	6.3427E-03	0.0010
9.5830	2.3955E-02	0.0006	13.9650	1.5297E-02	0.0007	17.2690	5.7970E-03	0.0010
9.8480	2.3556E-02	0.0006	14.1480	1.4855E-02	0.0007	17.4170	5.2281E-03	0.0010

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
10.1070	2.3124E-02	0.0006	14.3300	1.4412E-02	0.0007	17.5650	4.6359E-03	0.0011
10.3590	2.2708E-02	0.0006	14.5080	1.3968E-02	0.0007	17.7110	4.0167E-03	0.0011
10.6050	2.2293E-02	0.0006	14.6850	1.3509E-02	0.0007	17.8560	3.3540E-03	0.0012
10.8460	2.1874E-02	0.0006	14.8600	1.3070E-02	0.0007	18.0000	2.6120E-03	0.0012
3.8 (minimum boundary)								
4.4270	2.1689E-02	0.0007	11.0810	2.1476E-02	0.0006	15.0320	1.2634E-02	0.0007
4.9760	2.4724E-02	0.0007	11.3110	2.1026E-02	0.0006	15.2030	1.2168E-02	0.0007
5.4700	2.5977E-02	0.0007	11.5370	2.0591E-02	0.0006	15.3720	1.1713E-02	0.0007
5.9230	2.6522E-02	0.0007	11.7590	2.0175E-02	0.0006	15.5390	1.1266E-02	0.0007
6.3430	2.6715E-02	0.0006	11.9760	1.9734E-02	0.0006	15.7040	1.0798E-02	0.0008
6.7380	2.6711E-02	0.0006	12.1890	1.9301E-02	0.0006	15.8670	1.0327E-02	0.0008
7.1100	2.6569E-02	0.0006	12.3990	1.8853E-02	0.0006	16.0290	9.8445E-03	0.0008
7.4640	2.6375E-02	0.0006	12.6060	1.8422E-02	0.0006	16.1890	9.3635E-03	0.0008
7.8020	2.6103E-02	0.0006	12.8090	1.7963E-02	0.0006	16.3480	8.8759E-03	0.0008
8.1260	2.5815E-02	0.0006	13.0080	1.7525E-02	0.0006	16.5050	8.3970E-03	0.0008
8.4380	2.5471E-02	0.0006	13.2050	1.7089E-02	0.0006	16.6600	7.8979E-03	0.0009
8.7380	2.5136E-02	0.0006	13.3990	1.6661E-02	0.0006	16.8140	7.3871E-03	0.0009
9.0280	2.4754E-02	0.0006	13.5900	1.6215E-02	0.0006	16.9670	6.8625E-03	0.0009
9.3100	2.4350E-02	0.0006	13.7790	1.5774E-02	0.0006	17.1190	6.3278E-03	0.0009
9.5830	2.3966E-02	0.0006	13.9650	1.5328E-02	0.0007	17.2690	5.7701E-03	0.0010
9.8480	2.3570E-02	0.0006	14.1480	1.4877E-02	0.0007	17.4170	5.2009E-03	0.0010
10.1070	2.3158E-02	0.0006	14.3300	1.4435E-02	0.0007	17.5650	4.6155E-03	0.0011
10.3590	2.2745E-02	0.0006	14.5080	1.3985E-02	0.0007	17.7110	3.9979E-03	0.0011
10.6050	2.2320E-02	0.0006	14.6850	1.3521E-02	0.0007	17.8560	3.3363E-03	0.0012
10.8460	2.1915E-02	0.0006	14.8600	1.3079E-02	0.0007	18.0000	2.5969E-03	0.0012
3.8 (minimum boundary)								
4.4270	2.1558E-02	0.0007	11.0810	2.1497E-02	0.0006	15.0320	1.2643E-02	0.0007
4.9760	2.4615E-02	0.0007	11.3110	2.1056E-02	0.0006	15.2030	1.2186E-02	0.0007
5.4700	2.5865E-02	0.0007	11.5370	2.0623E-02	0.0006	15.3720	1.1727E-02	0.0007
5.9230	2.6432E-02	0.0006	11.7590	2.0194E-02	0.0006	15.5390	1.1267E-02	0.0007
6.3430	2.6668E-02	0.0006	11.9760	1.9754E-02	0.0006	15.7040	1.0795E-02	0.0007
6.7380	2.6666E-02	0.0006	12.1890	1.9319E-02	0.0006	15.8670	1.0329E-02	0.0007
7.1100	2.6561E-02	0.0006	12.3990	1.8879E-02	0.0006	16.0290	9.8401E-03	0.0008
7.4640	2.6355E-02	0.0006	12.6060	1.8458E-02	0.0006	16.1890	9.3673E-03	0.0008
7.8020	2.6119E-02	0.0006	12.8090	1.7988E-02	0.0006	16.3480	8.8828E-03	0.0008
8.1260	2.5826E-02	0.0006	13.0080	1.7544E-02	0.0006	16.5050	8.3913E-03	0.0008
8.4380	2.5467E-02	0.0006	13.2050	1.7117E-02	0.0006	16.6600	7.8924E-03	0.0008
8.7380	2.5139E-02	0.0006	13.3990	1.6672E-02	0.0006	16.8140	7.3812E-03	0.0008
9.0280	2.4770E-02	0.0006	13.5900	1.6240E-02	0.0006	16.9670	6.8629E-03	0.0009
9.3100	2.4380E-02	0.0006	13.7790	1.5785E-02	0.0006	17.1190	6.3261E-03	0.0009
9.5830	2.3982E-02	0.0006	13.9650	1.5333E-02	0.0006	17.2690	5.7742E-03	0.0009
9.8480	2.3591E-02	0.0006	14.1480	1.4896E-02	0.0006	17.4170	5.1984E-03	0.0010
10.1070	2.3197E-02	0.0006	14.3300	1.4442E-02	0.0006	17.5650	4.6057E-03	0.0010
10.3590	2.2746E-02	0.0006	14.5080	1.3989E-02	0.0007	17.7110	3.9890E-03	0.0011
10.6050	2.2327E-02	0.0006	14.6850	1.3558E-02	0.0007	17.8560	3.3258E-03	0.0011
10.8460	2.1922E-02	0.0006	14.8600	1.3095E-02	0.0007	18.0000	2.5890E-03	0.0012
3.8 (minimum boundary)								
4.4270	2.1478E-02	0.0007	11.0810	2.1512E-02	0.0006	15.0320	1.2648E-02	0.0007
4.9760	2.4526E-02	0.0007	11.3110	2.1087E-02	0.0006	15.2030	1.2193E-02	0.0007
5.4700	2.5809E-02	0.0006	11.5370	2.0641E-02	0.0006	15.3720	1.1721E-02	0.0007
5.9230	2.6400E-02	0.0006	11.7590	2.0204E-02	0.0006	15.5390	1.1252E-02	0.0007
6.3430	2.6629E-02	0.0006	11.9760	1.9792E-02	0.0006	15.7040	1.0791E-02	0.0007
z=103.489								
to z=103.988								

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
6.7380	2.6657E-02	0.0006	12.1890	1.9372E-02	0.0006	15.8670	1.0301E-02	0.0007
7.1100	2.6546E-02	0.0006	12.3990	1.8930E-02	0.0006	16.0290	9.8378E-03	0.0007
7.4640	2.6339E-02	0.0006	12.6060	1.8483E-02	0.0006	16.1890	9.3624E-03	0.0008
7.8020	2.6099E-02	0.0006	12.8090	1.8016E-02	0.0006	16.3480	8.8788E-03	0.0008
8.1260	2.5814E-02	0.0006	13.0080	1.7568E-02	0.0006	16.5050	8.3811E-03	0.0008
8.4380	2.5464E-02	0.0006	13.2050	1.7134E-02	0.0006	16.6600	7.8805E-03	0.0008
8.7380	2.5137E-02	0.0006	13.3990	1.6685E-02	0.0006	16.8140	7.3644E-03	0.0008
9.0280	2.4784E-02	0.0006	13.5900	1.6249E-02	0.0006	16.9670	6.8451E-03	0.0009
9.3100	2.4378E-02	0.0006	13.7790	1.5802E-02	0.0006	17.1190	6.3112E-03	0.0009
9.5830	2.3988E-02	0.0006	13.9650	1.5360E-02	0.0006	17.2690	5.7613E-03	0.0009
9.8480	2.3629E-02	0.0006	14.1480	1.4907E-02	0.0006	17.4170	5.1899E-03	0.0010
10.1070	2.3208E-02	0.0006	14.3300	1.4448E-02	0.0006	17.5650	4.5997E-03	0.0010
10.3590	2.2772E-02	0.0006	14.5080	1.4004E-02	0.0006	17.7110	3.9745E-03	0.0010
10.6050	2.2369E-02	0.0006	14.6850	1.3546E-02	0.0006	17.8560	3.3166E-03	0.0011
10.8460	2.1940E-02	0.0006	14.8600	1.3109E-02	0.0007	18.0000	2.5752E-03	0.0011
3.8 (minimum boundary)								
z=103.988								
4.4270	2.1416E-02	0.0007	11.0810	2.1530E-02	0.0006	15.0320	1.2638E-02	0.0006
4.9760	2.4488E-02	0.0007	11.3110	2.1096E-02	0.0006	15.2030	1.2193E-02	0.0007
5.4700	2.5751E-02	0.0006	11.5370	2.0673E-02	0.0006	15.3720	1.1725E-02	0.0007
5.9230	2.6325E-02	0.0006	11.7590	2.0244E-02	0.0006	15.5390	1.1259E-02	0.0007
6.3430	2.6581E-02	0.0006	11.9760	1.9819E-02	0.0006	15.7040	1.0796E-02	0.0007
6.7380	2.6622E-02	0.0006	12.1890	1.9379E-02	0.0006	15.8670	1.0326E-02	0.0007
7.1100	2.6524E-02	0.0006	12.3990	1.8931E-02	0.0006	16.0290	9.8467E-03	0.0007
7.4640	2.6289E-02	0.0006	12.6060	1.8477E-02	0.0006	16.1890	9.3678E-03	0.0007
7.8020	2.6072E-02	0.0006	12.8090	1.8024E-02	0.0006	16.3480	8.8745E-03	0.0008
8.1260	2.5806E-02	0.0006	13.0080	1.7571E-02	0.0006	16.5050	8.3826E-03	0.0008
8.4380	2.5491E-02	0.0006	13.2050	1.7146E-02	0.0006	16.6600	7.8723E-03	0.0008
8.7380	2.5132E-02	0.0006	13.3990	1.6704E-02	0.0006	16.8140	7.3614E-03	0.0008
9.0280	2.4792E-02	0.0006	13.5900	1.6256E-02	0.0006	16.9670	6.8418E-03	0.0008
9.3100	2.4420E-02	0.0006	13.7790	1.5813E-02	0.0006	17.1190	6.3051E-03	0.0009
9.5830	2.4022E-02	0.0006	13.9650	1.5378E-02	0.0006	17.2690	5.7576E-03	0.0009
9.8480	2.3609E-02	0.0006	14.1480	1.4929E-02	0.0006	17.4170	5.1825E-03	0.0009
10.1070	2.3216E-02	0.0006	14.3300	1.4470E-02	0.0006	17.5650	4.5871E-03	0.0010
10.3590	2.2796E-02	0.0006	14.5080	1.4017E-02	0.0006	17.7110	3.9692E-03	0.0010
10.6050	2.2385E-02	0.0006	14.6850	1.3560E-02	0.0006	17.8560	3.3116E-03	0.0011
10.8460	2.1963E-02	0.0006	14.8600	1.3113E-02	0.0006	18.0000	2.5746E-03	0.0011
3.8 (minimum boundary)								
z=104.486								
4.4270	2.1389E-02	0.0007	11.0810	2.1553E-02	0.0005	15.0320	1.2648E-02	0.0006
4.9760	2.4443E-02	0.0006	11.3110	2.1114E-02	0.0005	15.2030	1.2188E-02	0.0006
5.4700	2.5704E-02	0.0006	11.5370	2.0691E-02	0.0005	15.3720	1.1735E-02	0.0006
5.9230	2.6302E-02	0.0006	11.7590	2.0259E-02	0.0006	15.5390	1.1265E-02	0.0007
6.3430	2.6519E-02	0.0006	11.9760	1.9825E-02	0.0006	15.7040	1.0795E-02	0.0007
6.7380	2.6585E-02	0.0006	12.1890	1.9369E-02	0.0006	15.8670	1.0324E-02	0.0007
7.1100	2.6489E-02	0.0006	12.3990	1.8934E-02	0.0006	16.0290	9.8562E-03	0.0007
7.4640	2.6318E-02	0.0006	12.6060	1.8491E-02	0.0006	16.1890	9.3722E-03	0.0007
7.8020	2.6068E-02	0.0006	12.8090	1.8055E-02	0.0006	16.3480	8.8808E-03	0.0007
8.1260	2.5801E-02	0.0006	13.0080	1.7606E-02	0.0006	16.5050	8.3864E-03	0.0008
8.4380	2.5484E-02	0.0005	13.2050	1.7158E-02	0.0006	16.6600	7.8747E-03	0.0008
8.7380	2.5168E-02	0.0005	13.3990	1.6704E-02	0.0006	16.8140	7.3671E-03	0.0008
9.0280	2.4791E-02	0.0005	13.5900	1.6242E-02	0.0006	16.9670	6.8448E-03	0.0008
9.3100	2.4404E-02	0.0005	13.7790	1.5807E-02	0.0006	17.1190	6.3050E-03	0.0008
9.5830	2.4021E-02	0.0005	13.9650	1.5375E-02	0.0006	17.2690	5.7508E-03	0.0009

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
9.8480	2.3620E-02	0.0005	14.1480	1.4924E-02	0.0006	17.4170	5.1789E-03	0.0009
10.1070	2.3216E-02	0.0005	14.3300	1.4475E-02	0.0006	17.5650	4.5905E-03	0.0010
10.3590	2.2820E-02	0.0005	14.5080	1.4028E-02	0.0006	17.7110	3.9707E-03	0.0010
10.6050	2.2414E-02	0.0005	14.6850	1.3561E-02	0.0006	17.8560	3.3096E-03	0.0011
10.8460	2.1970E-02	0.0005	14.8600	1.3091E-02	0.0006	18.0000	2.5681E-03	0.0011
3.8 (minimum boundary)			z=104.985			to z=105.483		
4.4270	2.1379E-02	0.0006	11.0810	2.1535E-02	0.0005	15.0320	1.2656E-02	0.0006
4.9760	2.4402E-02	0.0006	11.3110	2.1115E-02	0.0005	15.2030	1.2201E-02	0.0006
5.4700	2.5678E-02	0.0006	11.5370	2.0692E-02	0.0005	15.3720	1.1736E-02	0.0006
5.9230	2.6258E-02	0.0006	11.7590	2.0273E-02	0.0005	15.5390	1.1271E-02	0.0006
6.3430	2.6511E-02	0.0006	11.9760	1.9838E-02	0.0005	15.7040	1.0800E-02	0.0007
6.7380	2.6562E-02	0.0006	12.1890	1.9383E-02	0.0005	15.8670	1.0325E-02	0.0007
7.1100	2.6472E-02	0.0006	12.3990	1.8939E-02	0.0005	16.0290	9.8578E-03	0.0007
7.4640	2.6307E-02	0.0006	12.6060	1.8502E-02	0.0006	16.1890	9.3718E-03	0.0007
7.8020	2.6051E-02	0.0005	12.8090	1.8054E-02	0.0006	16.3480	8.8797E-03	0.0007
8.1260	2.5793E-02	0.0005	13.0080	1.7612E-02	0.0006	16.5050	8.3803E-03	0.0007
8.4380	2.5481E-02	0.0005	13.2050	1.7177E-02	0.0006	16.6600	7.8833E-03	0.0008
8.7380	2.5165E-02	0.0005	13.3990	1.6713E-02	0.0006	16.8140	7.3624E-03	0.0008
9.0280	2.4797E-02	0.0005	13.5900	1.6266E-02	0.0006	16.9670	6.8349E-03	0.0008
9.3100	2.4419E-02	0.0005	13.7790	1.5822E-02	0.0006	17.1190	6.2961E-03	0.0008
9.5830	2.4016E-02	0.0005	13.9650	1.5385E-02	0.0006	17.2690	5.7519E-03	0.0009
9.8480	2.3618E-02	0.0005	14.1480	1.4938E-02	0.0006	17.4170	5.1775E-03	0.0009
10.1070	2.3223E-02	0.0005	14.3300	1.4490E-02	0.0006	17.5650	4.5851E-03	0.0009
10.3590	2.2823E-02	0.0005	14.5080	1.4033E-02	0.0006	17.7110	3.9651E-03	0.0010
10.6050	2.2411E-02	0.0005	14.6850	1.3575E-02	0.0006	17.8560	3.3065E-03	0.0010
10.8460	2.1965E-02	0.0005	14.8600	1.3117E-02	0.0006	18.0000	2.5672E-03	0.0011
3.8 (minimum boundary)			z=105.483			to z=105.982		
4.4270	2.1347E-02	0.0006	11.0810	2.1549E-02	0.0005	15.0320	1.2667E-02	0.0006
4.9760	2.4382E-02	0.0006	11.3110	2.1118E-02	0.0005	15.2030	1.2197E-02	0.0006
5.4700	2.5641E-02	0.0006	11.5370	2.0702E-02	0.0005	15.3720	1.1736E-02	0.0006
5.9230	2.6231E-02	0.0006	11.7590	2.0264E-02	0.0005	15.5390	1.1277E-02	0.0006
6.3430	2.6474E-02	0.0006	11.9760	1.9837E-02	0.0005	15.7040	1.0810E-02	0.0006
6.7380	2.6546E-02	0.0006	12.1890	1.9409E-02	0.0005	15.8670	1.0341E-02	0.0007
7.1100	2.6473E-02	0.0005	12.3990	1.8963E-02	0.0005	16.0290	9.8627E-03	0.0007
7.4640	2.6289E-02	0.0005	12.6060	1.8517E-02	0.0005	16.1890	9.3663E-03	0.0007
7.8020	2.6053E-02	0.0005	12.8090	1.8077E-02	0.0005	16.3480	8.8737E-03	0.0007
8.1260	2.5783E-02	0.0005	13.0080	1.7626E-02	0.0005	16.5050	8.3764E-03	0.0007
8.4380	2.5489E-02	0.0005	13.2050	1.7175E-02	0.0006	16.6600	7.8783E-03	0.0007
8.7380	2.5152E-02	0.0005	13.3990	1.6728E-02	0.0006	16.8140	7.3627E-03	0.0008
9.0280	2.4778E-02	0.0005	13.5900	1.6284E-02	0.0006	16.9670	6.8394E-03	0.0008
9.3100	2.4420E-02	0.0005	13.7790	1.5830E-02	0.0006	17.1190	6.3032E-03	0.0008
9.5830	2.4030E-02	0.0005	13.9650	1.5377E-02	0.0006	17.2690	5.7490E-03	0.0008
9.8480	2.3639E-02	0.0005	14.1480	1.4929E-02	0.0006	17.4170	5.1748E-03	0.0009
10.1070	2.3234E-02	0.0005	14.3300	1.4487E-02	0.0006	17.5650	4.5867E-03	0.0009
10.3590	2.2827E-02	0.0005	14.5080	1.4030E-02	0.0006	17.7110	3.9689E-03	0.0010
10.6050	2.2395E-02	0.0005	14.6850	1.3575E-02	0.0006	17.8560	3.3121E-03	0.0010
10.8460	2.1975E-02	0.0005	14.8600	1.3113E-02	0.0006	18.0000	2.5686E-03	0.0010
3.8 (minimum boundary)			z=105.982			to z=106.480		
4.4270	2.1354E-02	0.0006	11.0810	2.1573E-02	0.0005	15.0320	1.2663E-02	0.0006
4.9760	2.4332E-02	0.0006	11.3110	2.1149E-02	0.0005	15.2030	1.2206E-02	0.0006
5.4700	2.5607E-02	0.0006	11.5370	2.0715E-02	0.0005	15.3720	1.1745E-02	0.0006
5.9230	2.6230E-02	0.0006	11.7590	2.0274E-02	0.0005	15.5390	1.1276E-02	0.0006

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
6.3430	2.6447E-02	0.0006	11.9760	1.9851E-02	0.0005	15.7040	1.0805E-02	0.0006
6.7380	2.6530E-02	0.0005	12.1890	1.9410E-02	0.0005	15.8670	1.0324E-02	0.0006
7.1100	2.6440E-02	0.0005	12.3990	1.8968E-02	0.0005	16.0290	9.8455E-03	0.0007
7.4640	2.6266E-02	0.0005	12.6060	1.8538E-02	0.0005	16.1890	9.3626E-03	0.0007
7.8020	2.6043E-02	0.0005	12.8090	1.8080E-02	0.0005	16.3480	8.8782E-03	0.0007
8.1260	2.5778E-02	0.0005	13.0080	1.7634E-02	0.0005	16.5050	8.3851E-03	0.0007
8.4380	2.5480E-02	0.0005	13.2050	1.7191E-02	0.0005	16.6600	7.8762E-03	0.0007
8.7380	2.5143E-02	0.0005	13.3990	1.6728E-02	0.0005	16.8140	7.3673E-03	0.0008
9.0280	2.4788E-02	0.0005	13.5900	1.6286E-02	0.0006	16.9670	6.8388E-03	0.0008
9.3100	2.4418E-02	0.0005	13.7790	1.5851E-02	0.0006	17.1190	6.2975E-03	0.0008
9.5830	2.4034E-02	0.0005	13.9650	1.5398E-02	0.0006	17.2690	5.7465E-03	0.0008
9.8480	2.3635E-02	0.0005	14.1480	1.4940E-02	0.0006	17.4170	5.1722E-03	0.0009
10.1070	2.3237E-02	0.0005	14.3300	1.4495E-02	0.0006	17.5650	4.5822E-03	0.0009
10.3590	2.2822E-02	0.0005	14.5080	1.4026E-02	0.0006	17.7110	3.9646E-03	0.0009
10.6050	2.2427E-02	0.0005	14.6850	1.3568E-02	0.0006	17.8560	3.3076E-03	0.0010
10.8460	2.1998E-02	0.0005	14.8600	1.3112E-02	0.0006	18.0000	2.5609E-03	0.0010
3.8 (minimum boundary)			z=106.480			to z=106.979		
4.4270	2.1327E-02	0.0006	11.0810	2.1588E-02	0.0005	15.0320	1.2665E-02	0.0006
4.9760	2.4317E-02	0.0006	11.3110	2.1153E-02	0.0005	15.2030	1.2206E-02	0.0006
5.4700	2.5581E-02	0.0006	11.5370	2.0724E-02	0.0005	15.3720	1.1741E-02	0.0006
5.9230	2.6190E-02	0.0006	11.7590	2.0284E-02	0.0005	15.5390	1.1282E-02	0.0006
6.3430	2.6452E-02	0.0005	11.9760	1.9853E-02	0.0005	15.7040	1.0810E-02	0.0006
6.7380	2.6504E-02	0.0005	12.1890	1.9408E-02	0.0005	15.8670	1.0330E-02	0.0006
7.1100	2.6417E-02	0.0005	12.3990	1.8962E-02	0.0005	16.0290	9.8508E-03	0.0006
7.4640	2.6277E-02	0.0005	12.6060	1.8543E-02	0.0005	16.1890	9.3650E-03	0.0007
7.8020	2.6031E-02	0.0005	12.8090	1.8083E-02	0.0005	16.3480	8.8820E-03	0.0007
8.1260	2.5788E-02	0.0005	13.0080	1.7629E-02	0.0005	16.5050	8.3791E-03	0.0007
8.4380	2.5474E-02	0.0005	13.2050	1.7182E-02	0.0005	16.6600	7.8734E-03	0.0007
8.7380	2.5137E-02	0.0005	13.3990	1.6742E-02	0.0005	16.8140	7.3594E-03	0.0007
9.0280	2.4785E-02	0.0005	13.5900	1.6302E-02	0.0005	16.9670	6.8310E-03	0.0008
9.3100	2.4401E-02	0.0005	13.7790	1.5861E-02	0.0005	17.1190	6.2939E-03	0.0008
9.5830	2.4043E-02	0.0005	13.9650	1.5402E-02	0.0006	17.2690	5.7429E-03	0.0008
9.8480	2.3659E-02	0.0005	14.1480	1.4941E-02	0.0006	17.4170	5.1713E-03	0.0008
10.1070	2.3267E-02	0.0005	14.3300	1.4482E-02	0.0006	17.5650	4.5802E-03	0.0009
10.3590	2.2842E-02	0.0005	14.5080	1.4028E-02	0.0006	17.7110	3.9607E-03	0.0009
10.6050	2.2429E-02	0.0005	14.6850	1.3577E-02	0.0006	17.8560	3.3037E-03	0.0010
10.8460	2.2023E-02	0.0005	14.8600	1.3122E-02	0.0006	18.0000	2.5635E-03	0.0010
3.8 (minimum boundary)			z=106.979			to z=107.477		
4.4270	2.1322E-02	0.0006	11.0810	2.1592E-02	0.0005	15.0320	1.2676E-02	0.0006
4.9760	2.4300E-02	0.0006	11.3110	2.1170E-02	0.0005	15.2030	1.2203E-02	0.0006
5.4700	2.5549E-02	0.0006	11.5370	2.0736E-02	0.0005	15.3720	1.1747E-02	0.0006
5.9230	2.6167E-02	0.0006	11.7590	2.0281E-02	0.0005	15.5390	1.1287E-02	0.0006
6.3430	2.6445E-02	0.0005	11.9760	1.9852E-02	0.0005	15.7040	1.0815E-02	0.0006
6.7380	2.6488E-02	0.0005	12.1890	1.9414E-02	0.0005	15.8670	1.0340E-02	0.0006
7.1100	2.6428E-02	0.0005	12.3990	1.8973E-02	0.0005	16.0290	9.8625E-03	0.0006
7.4640	2.6257E-02	0.0005	12.6060	1.8518E-02	0.0005	16.1890	9.3809E-03	0.0006
7.8020	2.6020E-02	0.0005	12.8090	1.8078E-02	0.0005	16.3480	8.8871E-03	0.0007
8.1260	2.5754E-02	0.0005	13.0080	1.7637E-02	0.0005	16.5050	8.3842E-03	0.0007
8.4380	2.5466E-02	0.0005	13.2050	1.7179E-02	0.0005	16.6600	7.8798E-03	0.0007
8.7380	2.5119E-02	0.0005	13.3990	1.6750E-02	0.0005	16.8140	7.3721E-03	0.0007
9.0280	2.4757E-02	0.0005	13.5900	1.6319E-02	0.0005	16.9670	6.8429E-03	0.0007
9.3100	2.4398E-02	0.0005	13.7790	1.5855E-02	0.0005	17.1190	6.3048E-03	0.0008

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
9.5830	2.4036E-02	0.0005	13.9650	1.5402E-02	0.0005	17.2690	5.7491E-03	0.0008
9.8480	2.3648E-02	0.0005	14.1480	1.4946E-02	0.0005	17.4170	5.1773E-03	0.0008
10.1070	2.3256E-02	0.0005	14.3300	1.4501E-02	0.0006	17.5650	4.5848E-03	0.0009
10.3590	2.2857E-02	0.0005	14.5080	1.4043E-02	0.0006	17.7110	3.9595E-03	0.0009
10.6050	2.2437E-02	0.0005	14.6850	1.3589E-02	0.0006	17.8560	3.3018E-03	0.0010
10.8460	2.2009E-02	0.0005	14.8600	1.3136E-02	0.0006	18.0000	2.5626E-03	0.0010
3.8 (minimum boundary)			z=107.477			to z=107.975		
4.4270	2.1324E-02	0.0006	11.0810	2.1585E-02	0.0005	15.0320	1.2689E-02	0.0006
4.9760	2.4274E-02	0.0006	11.3110	2.1149E-02	0.0005	15.2030	1.2236E-02	0.0006
5.4700	2.5552E-02	0.0006	11.5370	2.0723E-02	0.0005	15.3720	1.1746E-02	0.0006
5.9230	2.6157E-02	0.0005	11.7590	2.0270E-02	0.0005	15.5390	1.1290E-02	0.0006
6.3430	2.6439E-02	0.0005	11.9760	1.9845E-02	0.0005	15.7040	1.0816E-02	0.0006
6.7380	2.6491E-02	0.0005	12.1890	1.9399E-02	0.0005	15.8670	1.0342E-02	0.0006
7.1100	2.6408E-02	0.0005	12.3990	1.8948E-02	0.0005	16.0290	9.8725E-03	0.0006
7.4640	2.6263E-02	0.0005	12.6060	1.8510E-02	0.0005	16.1890	9.3824E-03	0.0006
7.8020	2.6026E-02	0.0005	12.8090	1.8073E-02	0.0005	16.3480	8.8961E-03	0.0007
8.1260	2.5748E-02	0.0005	13.0080	1.7639E-02	0.0005	16.5050	8.3977E-03	0.0007
8.4380	2.5446E-02	0.0005	13.2050	1.7200E-02	0.0005	16.6600	7.8860E-03	0.0007
8.7380	2.5124E-02	0.0005	13.3990	1.6754E-02	0.0005	16.8140	7.3688E-03	0.0007
9.0280	2.4773E-02	0.0005	13.5900	1.6306E-02	0.0005	16.9670	6.8477E-03	0.0007
9.3100	2.4409E-02	0.0005	13.7790	1.5857E-02	0.0005	17.1190	6.3020E-03	0.0008
9.5830	2.4037E-02	0.0005	13.9650	1.5416E-02	0.0005	17.2690	5.7460E-03	0.0008
9.8480	2.3646E-02	0.0005	14.1480	1.4961E-02	0.0005	17.4170	5.1769E-03	0.0008
10.1070	2.3236E-02	0.0005	14.3300	1.4511E-02	0.0005	17.5650	4.5855E-03	0.0009
10.3590	2.2849E-02	0.0005	14.5080	1.4041E-02	0.0006	17.7110	3.9644E-03	0.0009
10.6050	2.2454E-02	0.0005	14.6850	1.3589E-02	0.0006	17.8560	3.3005E-03	0.0009
10.8460	2.2027E-02	0.0005	14.8600	1.3134E-02	0.0006	18.0000	2.5630E-03	0.0010
3.8 (minimum boundary)			z=107.975			to z=108.474		
4.4270	2.1301E-02	0.0006	11.0810	2.1597E-02	0.0005	15.0320	1.2682E-02	0.0006
4.9760	2.4291E-02	0.0006	11.3110	2.1163E-02	0.0005	15.2030	1.2232E-02	0.0006
5.4700	2.5541E-02	0.0006	11.5370	2.0722E-02	0.0005	15.3720	1.1760E-02	0.0006
5.9230	2.6129E-02	0.0005	11.7590	2.0291E-02	0.0005	15.5390	1.1300E-02	0.0006
6.3430	2.6412E-02	0.0005	11.9760	1.9841E-02	0.0005	15.7040	1.0830E-02	0.0006
6.7380	2.6474E-02	0.0005	12.1890	1.9402E-02	0.0005	15.8670	1.0350E-02	0.0006
7.1100	2.6412E-02	0.0005	12.3990	1.8975E-02	0.0005	16.0290	9.8663E-03	0.0006
7.4640	2.6231E-02	0.0005	12.6060	1.8531E-02	0.0005	16.1890	9.3884E-03	0.0006
7.8020	2.5994E-02	0.0005	12.8090	1.8091E-02	0.0005	16.3480	8.8927E-03	0.0006
8.1260	2.5736E-02	0.0005	13.0080	1.7644E-02	0.0005	16.5050	8.3918E-03	0.0007
8.4380	2.5435E-02	0.0005	13.2050	1.7197E-02	0.0005	16.6600	7.8811E-03	0.0007
8.7380	2.5121E-02	0.0005	13.3990	1.6763E-02	0.0005	16.8140	7.3702E-03	0.0007
9.0280	2.4769E-02	0.0005	13.5900	1.6311E-02	0.0005	16.9670	6.8455E-03	0.0007
9.3100	2.4415E-02	0.0005	13.7790	1.5866E-02	0.0005	17.1190	6.3035E-03	0.0008
9.5830	2.4036E-02	0.0005	13.9650	1.5403E-02	0.0005	17.2690	5.7497E-03	0.0008
9.8480	2.3633E-02	0.0005	14.1480	1.4961E-02	0.0005	17.4170	5.1831E-03	0.0008
10.1070	2.3252E-02	0.0005	14.3300	1.4520E-02	0.0005	17.5650	4.5893E-03	0.0008
10.3590	2.2850E-02	0.0005	14.5080	1.4053E-02	0.0005	17.7110	3.9626E-03	0.0009
10.6050	2.2442E-02	0.0005	14.6850	1.3600E-02	0.0006	17.8560	3.3000E-03	0.0009
10.8460	2.2011E-02	0.0005	14.8600	1.3145E-02	0.0006	18.0000	2.5599E-03	0.0010
3.8 (minimum boundary)			z=108.474			to z=108.972		
4.4270	2.1275E-02	0.0006	11.0810	2.1591E-02	0.0005	15.0320	1.2697E-02	0.0006
4.9760	2.4267E-02	0.0006	11.3110	2.1173E-02	0.0005	15.2030	1.2227E-02	0.0006
5.4700	2.5496E-02	0.0005	11.5370	2.0739E-02	0.0005	15.3720	1.1768E-02	0.0006

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
5.9230	2.6124E-02	0.0005	11.7590	2.0295E-02	0.0005	15.5390	1.1300E-02	0.0006
6.3430	2.6369E-02	0.0005	11.9760	1.9866E-02	0.0005	15.7040	1.0831E-02	0.0006
6.7380	2.6463E-02	0.0005	12.1890	1.9424E-02	0.0005	15.8670	1.0354E-02	0.0006
7.1100	2.6393E-02	0.0005	12.3990	1.8996E-02	0.0005	16.0290	9.8754E-03	0.0006
7.4640	2.6238E-02	0.0005	12.6060	1.8538E-02	0.0005	16.1890	9.3930E-03	0.0006
7.8020	2.5984E-02	0.0005	12.8090	1.8092E-02	0.0005	16.3480	8.8958E-03	0.0006
8.1260	2.5725E-02	0.0005	13.0080	1.7648E-02	0.0005	16.5050	8.3946E-03	0.0006
8.4380	2.5430E-02	0.0005	13.2050	1.7197E-02	0.0005	16.6600	7.8779E-03	0.0007
8.7380	2.5124E-02	0.0005	13.3990	1.6761E-02	0.0005	16.8140	7.3690E-03	0.0007
9.0280	2.4775E-02	0.0005	13.5900	1.6305E-02	0.0005	16.9670	6.8428E-03	0.0007
9.3100	2.4419E-02	0.0005	13.7790	1.5864E-02	0.0005	17.1190	6.3106E-03	0.0007
9.5830	2.4044E-02	0.0005	13.9650	1.5409E-02	0.0005	17.2690	5.7533E-03	0.0008
9.8480	2.3647E-02	0.0005	14.1480	1.4955E-02	0.0005	17.4170	5.1785E-03	0.0008
10.1070	2.3259E-02	0.0005	14.3300	1.4513E-02	0.0005	17.5650	4.5902E-03	0.0008
10.3590	2.2853E-02	0.0005	14.5080	1.4057E-02	0.0005	17.7110	3.9687E-03	0.0009
10.6050	2.2433E-02	0.0005	14.6850	1.3603E-02	0.0005	17.8560	3.3025E-03	0.0009
10.8460	2.2013E-02	0.0005	14.8600	1.3154E-02	0.0005	18.0000	2.5597E-03	0.0009
3.8 (minimum boundary)			z=108.972			to z=109.471		
4.4270	2.1278E-02	0.0006	11.0810	2.1601E-02	0.0005	15.0320	1.2693E-02	0.0006
4.9760	2.4241E-02	0.0006	11.3110	2.1173E-02	0.0005	15.2030	1.2223E-02	0.0006
5.4700	2.5498E-02	0.0005	11.5370	2.0724E-02	0.0005	15.3720	1.1768E-02	0.0006
5.9230	2.6113E-02	0.0005	11.7590	2.0306E-02	0.0005	15.5390	1.1308E-02	0.0006
6.3430	2.6354E-02	0.0005	11.9760	1.9877E-02	0.0005	15.7040	1.0837E-02	0.0006
6.7380	2.6436E-02	0.0005	12.1890	1.9429E-02	0.0005	15.8670	1.0362E-02	0.0006
7.1100	2.6382E-02	0.0005	12.3990	1.8992E-02	0.0005	16.0290	9.8833E-03	0.0006
7.4640	2.6223E-02	0.0005	12.6060	1.8546E-02	0.0005	16.1890	9.3921E-03	0.0006
7.8020	2.5992E-02	0.0005	12.8090	1.8111E-02	0.0005	16.3480	8.8967E-03	0.0006
8.1260	2.5729E-02	0.0005	13.0080	1.7661E-02	0.0005	16.5050	8.3908E-03	0.0006
8.4380	2.5428E-02	0.0005	13.2050	1.7214E-02	0.0005	16.6600	7.8909E-03	0.0007
8.7380	2.5111E-02	0.0005	13.3990	1.6764E-02	0.0005	16.8140	7.3694E-03	0.0007
9.0280	2.4765E-02	0.0005	13.5900	1.6311E-02	0.0005	16.9670	6.8402E-03	0.0007
9.3100	2.4415E-02	0.0005	13.7790	1.5859E-02	0.0005	17.1190	6.3025E-03	0.0007
9.5830	2.4023E-02	0.0005	13.9650	1.5418E-02	0.0005	17.2690	5.7535E-03	0.0008
9.8480	2.3640E-02	0.0005	14.1480	1.4964E-02	0.0005	17.4170	5.1820E-03	0.0008
10.1070	2.3242E-02	0.0005	14.3300	1.4520E-02	0.0005	17.5650	4.5928E-03	0.0008
10.3590	2.2856E-02	0.0005	14.5080	1.4056E-02	0.0005	17.7110	3.9717E-03	0.0009
10.6050	2.2446E-02	0.0005	14.6850	1.3599E-02	0.0005	17.8560	3.3095E-03	0.0009
10.8460	2.2023E-02	0.0005	14.8600	1.3151E-02	0.0005	18.0000	2.5637E-03	0.0009
3.8 (minimum boundary)			z=109.471			to z=109.969		
4.4270	2.1267E-02	0.0006	11.0810	2.1603E-02	0.0005	15.0320	1.2702E-02	0.0005
4.9760	2.4237E-02	0.0006	11.3110	2.1176E-02	0.0005	15.2030	1.2233E-02	0.0006
5.4700	2.5499E-02	0.0005	11.5370	2.0749E-02	0.0005	15.3720	1.1763E-02	0.0006
5.9230	2.6114E-02	0.0005	11.7590	2.0320E-02	0.0005	15.5390	1.1298E-02	0.0006
6.3430	2.6372E-02	0.0005	11.9760	1.9864E-02	0.0005	15.7040	1.0829E-02	0.0006
6.7380	2.6437E-02	0.0005	12.1890	1.9427E-02	0.0005	15.8670	1.0349E-02	0.0006
7.1100	2.6349E-02	0.0005	12.3990	1.8993E-02	0.0005	16.0290	9.8714E-03	0.0006
7.4640	2.6191E-02	0.0005	12.6060	1.8544E-02	0.0005	16.1890	9.3790E-03	0.0006
7.8020	2.5979E-02	0.0005	12.8090	1.8109E-02	0.0005	16.3480	8.8869E-03	0.0006
8.1260	2.5738E-02	0.0005	13.0080	1.7673E-02	0.0005	16.5050	8.3955E-03	0.0006
8.4380	2.5453E-02	0.0005	13.2050	1.7226E-02	0.0005	16.6600	7.8883E-03	0.0007
8.7380	2.5128E-02	0.0005	13.3990	1.6769E-02	0.0005	16.8140	7.3741E-03	0.0007
9.0280	2.4773E-02	0.0005	13.5900	1.6326E-02	0.0005	16.9670	6.8462E-03	0.0007

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
9.3100	2.4403E-02	0.0005	13.7790	1.5869E-02	0.0005	17.1190	6.3066E-03	0.0007
9.5830	2.4025E-02	0.0005	13.9650	1.5415E-02	0.0005	17.2690	5.7529E-03	0.0008
9.8480	2.3639E-02	0.0005	14.1480	1.4968E-02	0.0005	17.4170	5.1822E-03	0.0008
10.1070	2.3250E-02	0.0005	14.3300	1.4514E-02	0.0005	17.5650	4.5862E-03	0.0008
10.3590	2.2844E-02	0.0005	14.5080	1.4064E-02	0.0005	17.7110	3.9662E-03	0.0009
10.6050	2.2433E-02	0.0005	14.6850	1.3608E-02	0.0005	17.8560	3.3058E-03	0.0009
10.8460	2.2022E-02	0.0005	14.8600	1.3153E-02	0.0005	18.0000	2.5611E-03	0.0009
3.8 (minimum boundary)			z=109.969			to z=110.468		
4.4270	2.1256E-02	0.0006	11.0810	2.1601E-02	0.0004	15.0320	1.2696E-02	0.0005
4.9760	2.4220E-02	0.0005	11.3110	2.1171E-02	0.0005	15.2030	1.2246E-02	0.0005
5.4700	2.5498E-02	0.0005	11.5370	2.0756E-02	0.0005	15.3720	1.1775E-02	0.0006
5.9230	2.6085E-02	0.0005	11.7590	2.0315E-02	0.0005	15.5390	1.1298E-02	0.0006
6.3430	2.6360E-02	0.0005	11.9760	1.9863E-02	0.0005	15.7040	1.0827E-02	0.0006
6.7380	2.6434E-02	0.0005	12.1890	1.9433E-02	0.0005	15.8670	1.0344E-02	0.0006
7.1100	2.6348E-02	0.0005	12.3990	1.9006E-02	0.0005	16.0290	9.8628E-03	0.0006
7.4640	2.6190E-02	0.0005	12.6060	1.8546E-02	0.0005	16.1890	9.3709E-03	0.0006
7.8020	2.5995E-02	0.0005	12.8090	1.8109E-02	0.0005	16.3480	8.8808E-03	0.0006
8.1260	2.5745E-02	0.0005	13.0080	1.7658E-02	0.0005	16.5050	8.3866E-03	0.0006
8.4380	2.5453E-02	0.0005	13.2050	1.7216E-02	0.0005	16.6600	7.8908E-03	0.0006
8.7380	2.5134E-02	0.0005	13.3990	1.6769E-02	0.0005	16.8140	7.3730E-03	0.0007
9.0280	2.4787E-02	0.0004	13.5900	1.6323E-02	0.0005	16.9670	6.8456E-03	0.0007
9.3100	2.4406E-02	0.0004	13.7790	1.5871E-02	0.0005	17.1190	6.3029E-03	0.0007
9.5830	2.4042E-02	0.0004	13.9650	1.5423E-02	0.0005	17.2690	5.7482E-03	0.0007
9.8480	2.3665E-02	0.0004	14.1480	1.4965E-02	0.0005	17.4170	5.1843E-03	0.0008
10.1070	2.3257E-02	0.0004	14.3300	1.4513E-02	0.0005	17.5650	4.5845E-03	0.0008
10.3590	2.2851E-02	0.0004	14.5080	1.4071E-02	0.0005	17.7110	3.9675E-03	0.0008
10.6050	2.2428E-02	0.0004	14.6850	1.3603E-02	0.0005	17.8560	3.3060E-03	0.0009
10.8460	2.2024E-02	0.0004	14.8600	1.3153E-02	0.0005	18.0000	2.5639E-03	0.0009
3.8 (minimum boundary)			z=110.468			to z=110.966		
4.4270	2.1249E-02	0.0006	11.0810	2.1606E-02	0.0004	15.0320	1.2698E-02	0.0005
4.9760	2.4199E-02	0.0005	11.3110	2.1168E-02	0.0004	15.2030	1.2235E-02	0.0005
5.4700	2.5482E-02	0.0005	11.5370	2.0746E-02	0.0004	15.3720	1.1771E-02	0.0005
5.9230	2.6068E-02	0.0005	11.7590	2.0317E-02	0.0004	15.5390	1.1298E-02	0.0006
6.3430	2.6344E-02	0.0005	11.9760	1.9874E-02	0.0005	15.7040	1.0822E-02	0.0006
6.7380	2.6434E-02	0.0005	12.1890	1.9431E-02	0.0005	15.8670	1.0342E-02	0.0006
7.1100	2.6358E-02	0.0005	12.3990	1.9002E-02	0.0005	16.0290	9.8638E-03	0.0006
7.4640	2.6208E-02	0.0005	12.6060	1.8561E-02	0.0005	16.1890	9.3765E-03	0.0006
7.8020	2.5989E-02	0.0005	12.8090	1.8111E-02	0.0005	16.3480	8.8821E-03	0.0006
8.1260	2.5734E-02	0.0005	13.0080	1.7662E-02	0.0005	16.5050	8.3958E-03	0.0006
8.4380	2.5440E-02	0.0004	13.2050	1.7218E-02	0.0005	16.6600	7.8922E-03	0.0006
8.7380	2.5135E-02	0.0004	13.3990	1.6786E-02	0.0005	16.8140	7.3760E-03	0.0007
9.0280	2.4785E-02	0.0004	13.5900	1.6328E-02	0.0005	16.9670	6.8440E-03	0.0007
9.3100	2.4407E-02	0.0004	13.7790	1.5880E-02	0.0005	17.1190	6.2967E-03	0.0007
9.5830	2.4034E-02	0.0004	13.9650	1.5427E-02	0.0005	17.2690	5.7529E-03	0.0007
9.8480	2.3656E-02	0.0004	14.1480	1.4973E-02	0.0005	17.4170	5.1842E-03	0.0008
10.1070	2.3255E-02	0.0004	14.3300	1.4521E-02	0.0005	17.5650	4.5899E-03	0.0008
10.3590	2.2861E-02	0.0004	14.5080	1.4068E-02	0.0005	17.7110	3.9678E-03	0.0008
10.6050	2.2438E-02	0.0004	14.6850	1.3612E-02	0.0005	17.8560	3.3052E-03	0.0009
10.8460	2.2024E-02	0.0004	14.8600	1.3150E-02	0.0005	18.0000	2.5638E-03	0.0009
3.8 (minimum boundary)			z=110.966			to z=111.465		
4.4270	2.1257E-02	0.0006	11.0810	2.1607E-02	0.0004	15.0320	1.2701E-02	0.0005
4.9760	2.4222E-02	0.0005	11.3110	2.1193E-02	0.0004	15.2030	1.2235E-02	0.0005

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
5.4700	2.5450E-02	0.0005	11.5370	2.0751E-02	0.0004	15.3720	1.1765E-02	0.0005
5.9230	2.6048E-02	0.0005	11.7590	2.0310E-02	0.0004	15.5390	1.1302E-02	0.0006
6.3430	2.6347E-02	0.0005	11.9760	1.9867E-02	0.0004	15.7040	1.0825E-02	0.0006
6.7380	2.6428E-02	0.0005	12.1890	1.9439E-02	0.0004	15.8670	1.0347E-02	0.0006
7.1100	2.6358E-02	0.0005	12.3990	1.8989E-02	0.0005	16.0290	9.8708E-03	0.0006
7.4640	2.6185E-02	0.0005	12.6060	1.8556E-02	0.0005	16.1890	9.3803E-03	0.0006
7.8020	2.5989E-02	0.0005	12.8090	1.8115E-02	0.0005	16.3480	8.8935E-03	0.0006
8.1260	2.5751E-02	0.0004	13.0080	1.7678E-02	0.0005	16.5050	8.3953E-03	0.0006
8.4380	2.5455E-02	0.0004	13.2050	1.7228E-02	0.0005	16.6600	7.8930E-03	0.0006
8.7380	2.5116E-02	0.0004	13.3990	1.6775E-02	0.0005	16.8140	7.3785E-03	0.0006
9.0280	2.4769E-02	0.0004	13.5900	1.6340E-02	0.0005	16.9670	6.8435E-03	0.0007
9.3100	2.4413E-02	0.0004	13.7790	1.5876E-02	0.0005	17.1190	6.3051E-03	0.0007
9.5830	2.4019E-02	0.0004	13.9650	1.5425E-02	0.0005	17.2690	5.7493E-03	0.0007
9.8480	2.3660E-02	0.0004	14.1480	1.4975E-02	0.0005	17.4170	5.1757E-03	0.0008
10.1070	2.3255E-02	0.0004	14.3300	1.4521E-02	0.0005	17.5650	4.5876E-03	0.0008
10.3590	2.2858E-02	0.0004	14.5080	1.4066E-02	0.0005	17.7110	3.9647E-03	0.0008
10.6050	2.2441E-02	0.0004	14.6850	1.3612E-02	0.0005	17.8560	3.3056E-03	0.0009
10.8460	2.2011E-02	0.0004	14.8600	1.3162E-02	0.0005	18.0000	2.5649E-03	0.0009
3.8 (minimum boundary)			z=111.465			to z=111.963		
4.4270	2.1239E-02	0.0005	11.0810	2.1608E-02	0.0004	15.0320	1.2691E-02	0.0005
4.9760	2.4210E-02	0.0005	11.3110	2.1191E-02	0.0004	15.2030	1.2225E-02	0.0005
5.4700	2.5455E-02	0.0005	11.5370	2.0754E-02	0.0004	15.3720	1.1758E-02	0.0005
5.9230	2.6053E-02	0.0005	11.7590	2.0308E-02	0.0004	15.5390	1.1291E-02	0.0005
6.3430	2.6330E-02	0.0005	11.9760	1.9879E-02	0.0004	15.7040	1.0827E-02	0.0006
6.7380	2.6424E-02	0.0005	12.1890	1.9437E-02	0.0004	15.8670	1.0350E-02	0.0006
7.1100	2.6340E-02	0.0005	12.3990	1.9010E-02	0.0004	16.0290	9.8682E-03	0.0006
7.4640	2.6187E-02	0.0005	12.6060	1.8566E-02	0.0005	16.1890	9.3865E-03	0.0006
7.8020	2.6003E-02	0.0004	12.8090	1.8128E-02	0.0005	16.3480	8.8938E-03	0.0006
8.1260	2.5746E-02	0.0004	13.0080	1.7687E-02	0.0005	16.5050	8.3947E-03	0.0006
8.4380	2.5440E-02	0.0004	13.2050	1.7231E-02	0.0005	16.6600	7.8904E-03	0.0006
8.7380	2.5115E-02	0.0004	13.3990	1.6784E-02	0.0005	16.8140	7.3751E-03	0.0006
9.0280	2.4772E-02	0.0004	13.5900	1.6336E-02	0.0005	16.9670	6.8489E-03	0.0007
9.3100	2.4417E-02	0.0004	13.7790	1.5871E-02	0.0005	17.1190	6.3088E-03	0.0007
9.5830	2.4040E-02	0.0004	13.9650	1.5422E-02	0.0005	17.2690	5.7463E-03	0.0007
9.8480	2.3662E-02	0.0004	14.1480	1.4970E-02	0.0005	17.4170	5.1793E-03	0.0008
10.1070	2.3271E-02	0.0004	14.3300	1.4522E-02	0.0005	17.5650	4.5892E-03	0.0008
10.3590	2.2850E-02	0.0004	14.5080	1.4068E-02	0.0005	17.7110	3.9672E-03	0.0008
10.6050	2.2429E-02	0.0004	14.6850	1.3612E-02	0.0005	17.8560	3.3030E-03	0.0009
10.8460	2.2026E-02	0.0004	14.8600	1.3151E-02	0.0005	18.0000	2.5637E-03	0.0009
3.8 (minimum boundary)			z=111.963			to z=112.462		
4.4270	2.1219E-02	0.0005	11.0810	2.1595E-02	0.0004	15.0320	1.2695E-02	0.0005
4.9760	2.4203E-02	0.0005	11.3110	2.1178E-02	0.0004	15.2030	1.2235E-02	0.0005
5.4700	2.5455E-02	0.0005	11.5370	2.0739E-02	0.0004	15.3720	1.1770E-02	0.0005
5.9230	2.6058E-02	0.0005	11.7590	2.0315E-02	0.0004	15.5390	1.1301E-02	0.0005
6.3430	2.6321E-02	0.0005	11.9760	1.9878E-02	0.0004	15.7040	1.0832E-02	0.0006
6.7380	2.6410E-02	0.0005	12.1890	1.9441E-02	0.0004	15.8670	1.0353E-02	0.0006
7.1100	2.6337E-02	0.0005	12.3990	1.9007E-02	0.0004	16.0290	9.8785E-03	0.0006
7.4640	2.6200E-02	0.0004	12.6060	1.8567E-02	0.0004	16.1890	9.3855E-03	0.0006
7.8020	2.5991E-02	0.0004	12.8090	1.8122E-02	0.0004	16.3480	8.8924E-03	0.0006
8.1260	2.5741E-02	0.0004	13.0080	1.7680E-02	0.0005	16.5050	8.3958E-03	0.0006
8.4380	2.5447E-02	0.0004	13.2050	1.7226E-02	0.0005	16.6600	7.8914E-03	0.0006
8.7380	2.5124E-02	0.0004	13.3990	1.6781E-02	0.0005	16.8140	7.3754E-03	0.0006

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
9.0280	2.4779E-02	0.0004	13.5900	1.6325E-02	0.0005	16.9670	6.8495E-03	0.0007
9.3100	2.4418E-02	0.0004	13.7790	1.5873E-02	0.0005	17.1190	6.3109E-03	0.0007
9.5830	2.4044E-02	0.0004	13.9650	1.5425E-02	0.0005	17.2690	5.7536E-03	0.0007
9.8480	2.3674E-02	0.0004	14.1480	1.4974E-02	0.0005	17.4170	5.1792E-03	0.0007
10.1070	2.3271E-02	0.0004	14.3300	1.4529E-02	0.0005	17.5650	4.5880E-03	0.0008
10.3590	2.2849E-02	0.0004	14.5080	1.4062E-02	0.0005	17.7110	3.9660E-03	0.0008
10.6050	2.2442E-02	0.0004	14.6850	1.3607E-02	0.0005	17.8560	3.3016E-03	0.0009
10.8460	2.2027E-02	0.0004	14.8600	1.3149E-02	0.0005	18.0000	2.5608E-03	0.0009
3.8 (minimum boundary)			z=112.462			to z=112.960		
4.4270	2.1198E-02	0.0005	11.0810	2.1587E-02	0.0004	15.0320	1.2701E-02	0.0005
4.9760	2.4181E-02	0.0005	11.3110	2.1177E-02	0.0004	15.2030	1.2242E-02	0.0005
5.4700	2.5459E-02	0.0005	11.5370	2.0742E-02	0.0004	15.3720	1.1785E-02	0.0005
5.9230	2.6052E-02	0.0005	11.7590	2.0306E-02	0.0004	15.5390	1.1311E-02	0.0005
6.3430	2.6306E-02	0.0005	11.9760	1.9880E-02	0.0004	15.7040	1.0838E-02	0.0005
6.7380	2.6391E-02	0.0005	12.1890	1.9455E-02	0.0004	15.8670	1.0356E-02	0.0006
7.1100	2.6324E-02	0.0005	12.3990	1.9013E-02	0.0004	16.0290	9.8745E-03	0.0006
7.4640	2.6188E-02	0.0004	12.6060	1.8569E-02	0.0004	16.1890	9.3967E-03	0.0006
7.8020	2.5980E-02	0.0004	12.8090	1.8125E-02	0.0004	16.3480	8.8995E-03	0.0006
8.1260	2.5721E-02	0.0004	13.0080	1.7675E-02	0.0004	16.5050	8.4011E-03	0.0006
8.4380	2.5456E-02	0.0004	13.2050	1.7224E-02	0.0005	16.6600	7.8958E-03	0.0006
8.7380	2.5139E-02	0.0004	13.3990	1.6768E-02	0.0005	16.8140	7.3766E-03	0.0006
9.0280	2.4781E-02	0.0004	13.5900	1.6329E-02	0.0005	16.9670	6.8503E-03	0.0007
9.3100	2.4414E-02	0.0004	13.7790	1.5875E-02	0.0005	17.1190	6.3127E-03	0.0007
9.5830	2.4052E-02	0.0004	13.9650	1.5432E-02	0.0005	17.2690	5.7563E-03	0.0007
9.8480	2.3670E-02	0.0004	14.1480	1.4978E-02	0.0005	17.4170	5.1825E-03	0.0007
10.1070	2.3262E-02	0.0004	14.3300	1.4528E-02	0.0005	17.5650	4.5856E-03	0.0008
10.3590	2.2841E-02	0.0004	14.5080	1.4077E-02	0.0005	17.7110	3.9658E-03	0.0008
10.6050	2.2442E-02	0.0004	14.6850	1.3619E-02	0.0005	17.8560	3.3017E-03	0.0008
10.8460	2.2026E-02	0.0004	14.8600	1.3161E-02	0.0005	18.0000	2.5632E-03	0.0009
3.8 (minimum boundary)			z=112.960			to z=113.459		
4.4270	2.1219E-02	0.0005	11.0810	2.1612E-02	0.0004	15.0320	1.2706E-02	0.0005
4.9760	2.4186E-02	0.0005	11.3110	2.1173E-02	0.0004	15.2030	1.2249E-02	0.0005
5.4700	2.5435E-02	0.0005	11.5370	2.0775E-02	0.0004	15.3720	1.1787E-02	0.0005
5.9230	2.6034E-02	0.0005	11.7590	2.0338E-02	0.0004	15.5390	1.1308E-02	0.0005
6.3430	2.6308E-02	0.0005	11.9760	1.9894E-02	0.0004	15.7040	1.0834E-02	0.0005
6.7380	2.6390E-02	0.0005	12.1890	1.9465E-02	0.0004	15.8670	1.0357E-02	0.0006
7.1100	2.6324E-02	0.0004	12.3990	1.9021E-02	0.0004	16.0290	9.8742E-03	0.0006
7.4640	2.6170E-02	0.0004	12.6060	1.8574E-02	0.0004	16.1890	9.3895E-03	0.0006
7.8020	2.5969E-02	0.0004	12.8090	1.8107E-02	0.0004	16.3480	8.8991E-03	0.0006
8.1260	2.5714E-02	0.0004	13.0080	1.7667E-02	0.0004	16.5050	8.4040E-03	0.0006
8.4380	2.5433E-02	0.0004	13.2050	1.7226E-02	0.0004	16.6600	7.8950E-03	0.0006
8.7380	2.5129E-02	0.0004	13.3990	1.6776E-02	0.0005	16.8140	7.3733E-03	0.0006
9.0280	2.4778E-02	0.0004	13.5900	1.6337E-02	0.0005	16.9670	6.8491E-03	0.0006
9.3100	2.4409E-02	0.0004	13.7790	1.5886E-02	0.0005	17.1190	6.3104E-03	0.0007
9.5830	2.4041E-02	0.0004	13.9650	1.5434E-02	0.0005	17.2690	5.7572E-03	0.0007
9.8480	2.3654E-02	0.0004	14.1480	1.4981E-02	0.0005	17.4170	5.1821E-03	0.0007
10.1070	2.3246E-02	0.0004	14.3300	1.4522E-02	0.0005	17.5650	4.5827E-03	0.0008
10.3590	2.2843E-02	0.0004	14.5080	1.4071E-02	0.0005	17.7110	3.9667E-03	0.0008
10.6050	2.2447E-02	0.0004	14.6850	1.3623E-02	0.0005	17.8560	3.3051E-03	0.0008
10.8460	2.2031E-02	0.0004	14.8600	1.3165E-02	0.0005	18.0000	2.5661E-03	0.0009
3.8 (minimum boundary)			z=113.459			to z=113.957		
4.4270	2.1208E-02	0.0005	11.0810	2.1608E-02	0.0004	15.0320	1.2698E-02	0.0005

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
4.9760	2.4171E-02	0.0005	11.3110	2.1181E-02	0.0004	15.2030	1.2238E-02	0.0005
5.4700	2.5427E-02	0.0005	11.5370	2.0761E-02	0.0004	15.3720	1.1776E-02	0.0005
5.9230	2.6026E-02	0.0005	11.7590	2.0341E-02	0.0004	15.5390	1.1308E-02	0.0005
6.3430	2.6296E-02	0.0005	11.9760	1.9899E-02	0.0004	15.7040	1.0839E-02	0.0005
6.7380	2.6382E-02	0.0005	12.1890	1.9459E-02	0.0004	15.8670	1.0364E-02	0.0006
7.1100	2.6326E-02	0.0004	12.3990	1.9026E-02	0.0004	16.0290	9.8762E-03	0.0006
7.4640	2.6179E-02	0.0004	12.6060	1.8571E-02	0.0004	16.1890	9.3899E-03	0.0006
7.8020	2.5972E-02	0.0004	12.8090	1.8127E-02	0.0004	16.3480	8.8984E-03	0.0006
8.1260	2.5710E-02	0.0004	13.0080	1.7678E-02	0.0004	16.5050	8.3920E-03	0.0006
8.4380	2.5433E-02	0.0004	13.2050	1.7223E-02	0.0004	16.6600	7.8879E-03	0.0006
8.7380	2.5127E-02	0.0004	13.3990	1.6771E-02	0.0005	16.8140	7.3740E-03	0.0006
9.0280	2.4776E-02	0.0004	13.5900	1.6326E-02	0.0005	16.9670	6.8560E-03	0.0006
9.3100	2.4419E-02	0.0004	13.7790	1.5877E-02	0.0005	17.1190	6.3167E-03	0.0007
9.5830	2.4052E-02	0.0004	13.9650	1.5433E-02	0.0005	17.2690	5.7577E-03	0.0007
9.8480	2.3661E-02	0.0004	14.1480	1.4985E-02	0.0005	17.4170	5.1847E-03	0.0007
10.1070	2.3261E-02	0.0004	14.3300	1.4531E-02	0.0005	17.5650	4.5888E-03	0.0008
10.3590	2.2864E-02	0.0004	14.5080	1.4079E-02	0.0005	17.7110	3.9667E-03	0.0008
10.6050	2.2452E-02	0.0004	14.6850	1.3623E-02	0.0005	17.8560	3.3056E-03	0.0008
10.8460	2.2028E-02	0.0004	14.8600	1.3160E-02	0.0005	18.0000	2.5602E-03	0.0009
3.8 (minimum boundary)			z=113.957			to z=114.455		
4.4270	2.1202E-02	0.0005	11.0810	2.1613E-02	0.0004	15.0320	1.2708E-02	0.0005
4.9760	2.4153E-02	0.0005	11.3110	2.1185E-02	0.0004	15.2030	1.2246E-02	0.0005
5.4700	2.5416E-02	0.0005	11.5370	2.0769E-02	0.0004	15.3720	1.1777E-02	0.0005
5.9230	2.6015E-02	0.0005	11.7590	2.0337E-02	0.0004	15.5390	1.1312E-02	0.0005
6.3430	2.6291E-02	0.0005	11.9760	1.9905E-02	0.0004	15.7040	1.0840E-02	0.0005
6.7380	2.6378E-02	0.0004	12.1890	1.9447E-02	0.0004	15.8670	1.0365E-02	0.0005
7.1100	2.6327E-02	0.0004	12.3990	1.9014E-02	0.0004	16.0290	9.8827E-03	0.0006
7.4640	2.6192E-02	0.0004	12.6060	1.8571E-02	0.0004	16.1890	9.3938E-03	0.0006
7.8020	2.5993E-02	0.0004	12.8090	1.8131E-02	0.0004	16.3480	8.9002E-03	0.0006
8.1260	2.5729E-02	0.0004	13.0080	1.7685E-02	0.0004	16.5050	8.4046E-03	0.0006
8.4380	2.5427E-02	0.0004	13.2050	1.7232E-02	0.0004	16.6600	7.8955E-03	0.0006
8.7380	2.5101E-02	0.0004	13.3990	1.6771E-02	0.0004	16.8140	7.3724E-03	0.0006
9.0280	2.4750E-02	0.0004	13.5900	1.6333E-02	0.0005	16.9670	6.8467E-03	0.0006
9.3100	2.4413E-02	0.0004	13.7790	1.5888E-02	0.0005	17.1190	6.3049E-03	0.0007
9.5830	2.4037E-02	0.0004	13.9650	1.5434E-02	0.0005	17.2690	5.7517E-03	0.0007
9.8480	2.3676E-02	0.0004	14.1480	1.4982E-02	0.0005	17.4170	5.1794E-03	0.0007
10.1070	2.3265E-02	0.0004	14.3300	1.4532E-02	0.0005	17.5650	4.5839E-03	0.0008
10.3590	2.2867E-02	0.0004	14.5080	1.4074E-02	0.0005	17.7110	3.9641E-03	0.0008
10.6050	2.2458E-02	0.0004	14.6850	1.3616E-02	0.0005	17.8560	3.3046E-03	0.0008
10.8460	2.2037E-02	0.0004	14.8600	1.3162E-02	0.0005	18.0000	2.5591E-03	0.0009
3.8 (minimum boundary)			z=114.455			to z=114.954		
4.4270	2.1214E-02	0.0005	11.0810	2.1625E-02	0.0004	15.0320	1.2699E-02	0.0005
4.9760	2.4159E-02	0.0005	11.3110	2.1190E-02	0.0004	15.2030	1.2240E-02	0.0005
5.4700	2.5416E-02	0.0005	11.5370	2.0768E-02	0.0004	15.3720	1.1773E-02	0.0005
5.9230	2.6012E-02	0.0005	11.7590	2.0336E-02	0.0004	15.5390	1.1307E-02	0.0005
6.3430	2.6313E-02	0.0005	11.9760	1.9891E-02	0.0004	15.7040	1.0833E-02	0.0005
6.7380	2.6387E-02	0.0004	12.1890	1.9448E-02	0.0004	15.8670	1.0362E-02	0.0005
7.1100	2.6313E-02	0.0004	12.3990	1.9012E-02	0.0004	16.0290	9.8838E-03	0.0006
7.4640	2.6187E-02	0.0004	12.6060	1.8568E-02	0.0004	16.1890	9.3981E-03	0.0006
7.8020	2.5955E-02	0.0004	12.8090	1.8123E-02	0.0004	16.3480	8.9058E-03	0.0006
8.1260	2.5707E-02	0.0004	13.0080	1.7680E-02	0.0004	16.5050	8.4068E-03	0.0006
8.4380	2.5434E-02	0.0004	13.2050	1.7239E-02	0.0004	16.6600	7.8975E-03	0.0006

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
8.7380	2.5094E-02	0.0004	13.3990	1.6784E-02	0.0004	16.8140	7.3758E-03	0.0006
9.0280	2.4761E-02	0.0004	13.5900	1.6335E-02	0.0004	16.9670	6.8478E-03	0.0006
9.3100	2.4414E-02	0.0004	13.7790	1.5880E-02	0.0005	17.1190	6.3062E-03	0.0007
9.5830	2.4062E-02	0.0004	13.9650	1.5438E-02	0.0005	17.2690	5.7460E-03	0.0007
9.8480	2.3667E-02	0.0004	14.1480	1.4984E-02	0.0005	17.4170	5.1778E-03	0.0007
10.1070	2.3275E-02	0.0004	14.3300	1.4531E-02	0.0005	17.5650	4.5839E-03	0.0008
10.3590	2.2864E-02	0.0004	14.5080	1.4079E-02	0.0005	17.7110	3.9634E-03	0.0008
10.6050	2.2457E-02	0.0004	14.6850	1.3615E-02	0.0005	17.8560	3.3035E-03	0.0008
10.8460	2.2053E-02	0.0004	14.8600	1.3159E-02	0.0005	18.0000	2.5593E-03	0.0008
3.8 (minimum boundary)			z=114.954			to z=115.452		
4.4270	2.1208E-02	0.0005	11.0810	2.1617E-02	0.0004	15.0320	1.2700E-02	0.0005
4.9760	2.4153E-02	0.0005	11.3110	2.1190E-02	0.0004	15.2030	1.2239E-02	0.0005
5.4700	2.5433E-02	0.0005	11.5370	2.0762E-02	0.0004	15.3720	1.1774E-02	0.0005
5.9230	2.6050E-02	0.0005	11.7590	2.0338E-02	0.0004	15.5390	1.1312E-02	0.0005
6.3430	2.6298E-02	0.0005	11.9760	1.9897E-02	0.0004	15.7040	1.0833E-02	0.0005
6.7380	2.6385E-02	0.0004	12.1890	1.9468E-02	0.0004	15.8670	1.0360E-02	0.0005
7.1100	2.6319E-02	0.0004	12.3990	1.9022E-02	0.0004	16.0290	9.8728E-03	0.0006
7.4640	2.6183E-02	0.0004	12.6060	1.8576E-02	0.0004	16.1890	9.3917E-03	0.0006
7.8020	2.5964E-02	0.0004	12.8090	1.8123E-02	0.0004	16.3480	8.9019E-03	0.0006
8.1260	2.5725E-02	0.0004	13.0080	1.7673E-02	0.0004	16.5050	8.4006E-03	0.0006
8.4380	2.5413E-02	0.0004	13.2050	1.7237E-02	0.0004	16.6600	7.8883E-03	0.0006
8.7380	2.5094E-02	0.0004	13.3990	1.6793E-02	0.0004	16.8140	7.3758E-03	0.0006
9.0280	2.4754E-02	0.0004	13.5900	1.6355E-02	0.0004	16.9670	6.8461E-03	0.0006
9.3100	2.4402E-02	0.0004	13.7790	1.5889E-02	0.0005	17.1190	6.3082E-03	0.0007
9.5830	2.4041E-02	0.0004	13.9650	1.5434E-02	0.0005	17.2690	5.7523E-03	0.0007
9.8480	2.3655E-02	0.0004	14.1480	1.4983E-02	0.0005	17.4170	5.1829E-03	0.0007
10.1070	2.3271E-02	0.0004	14.3300	1.4538E-02	0.0005	17.5650	4.5908E-03	0.0008
10.3590	2.2866E-02	0.0004	14.5080	1.4073E-02	0.0005	17.7110	3.9672E-03	0.0008
10.6050	2.2452E-02	0.0004	14.6850	1.3615E-02	0.0005	17.8560	3.3041E-03	0.0008
10.8460	2.2031E-02	0.0004	14.8600	1.3157E-02	0.0005	18.0000	2.5632E-03	0.0008
3.8 (minimum boundary)			z=115.452			to z=115.951		
4.4270	2.1205E-02	0.0005	11.0810	2.1617E-02	0.0004	15.0320	1.2698E-02	0.0005
4.9760	2.4149E-02	0.0005	11.3110	2.1189E-02	0.0004	15.2030	1.2239E-02	0.0005
5.4700	2.5424E-02	0.0005	11.5370	2.0764E-02	0.0004	15.3720	1.1777E-02	0.0005
5.9230	2.6037E-02	0.0005	11.7590	2.0330E-02	0.0004	15.5390	1.1304E-02	0.0005
6.3430	2.6299E-02	0.0005	11.9760	1.9892E-02	0.0004	15.7040	1.0833E-02	0.0005
6.7380	2.6384E-02	0.0004	12.1890	1.9460E-02	0.0004	15.8670	1.0359E-02	0.0005
7.1100	2.6311E-02	0.0004	12.3990	1.9026E-02	0.0004	16.0290	9.8660E-03	0.0006
7.4640	2.6179E-02	0.0004	12.6060	1.8578E-02	0.0004	16.1890	9.3851E-03	0.0006
7.8020	2.5963E-02	0.0004	12.8090	1.8129E-02	0.0004	16.3480	8.8948E-03	0.0006
8.1260	2.5717E-02	0.0004	13.0080	1.7689E-02	0.0004	16.5050	8.3948E-03	0.0006
8.4380	2.5424E-02	0.0004	13.2050	1.7249E-02	0.0004	16.6600	7.8900E-03	0.0006
8.7380	2.5099E-02	0.0004	13.3990	1.6804E-02	0.0004	16.8140	7.3743E-03	0.0006
9.0280	2.4746E-02	0.0004	13.5900	1.6360E-02	0.0004	16.9670	6.8460E-03	0.0006
9.3100	2.4396E-02	0.0004	13.7790	1.5910E-02	0.0004	17.1190	6.3078E-03	0.0007
9.5830	2.4027E-02	0.0004	13.9650	1.5454E-02	0.0005	17.2690	5.7497E-03	0.0007
9.8480	2.3643E-02	0.0004	14.1480	1.5009E-02	0.0005	17.4170	5.1862E-03	0.0007
10.1070	2.3258E-02	0.0004	14.3300	1.4546E-02	0.0005	17.5650	4.5946E-03	0.0008
10.3590	2.2853E-02	0.0004	14.5080	1.4081E-02	0.0005	17.7110	3.9669E-03	0.0008
10.6050	2.2443E-02	0.0004	14.6850	1.3625E-02	0.0005	17.8560	3.3054E-03	0.0008
10.8460	2.2033E-02	0.0004	14.8600	1.3164E-02	0.0005	18.0000	2.5616E-03	0.0008
3.8 (minimum boundary)			z=115.951			to z=116.449		

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
4.4270	2.1188E-02	0.0005	11.0810	2.1629E-02	0.0004	15.0320	1.2704E-02	0.0005
4.9760	2.4155E-02	0.0005	11.3110	2.1192E-02	0.0004	15.2030	1.2242E-02	0.0005
5.4700	2.5427E-02	0.0005	11.5370	2.0760E-02	0.0004	15.3720	1.1774E-02	0.0005
5.9230	2.6031E-02	0.0005	11.7590	2.0328E-02	0.0004	15.5390	1.1307E-02	0.0005
6.3430	2.6303E-02	0.0004	11.9760	1.9888E-02	0.0004	15.7040	1.0840E-02	0.0005
6.7380	2.6360E-02	0.0004	12.1890	1.9461E-02	0.0004	15.8670	1.0354E-02	0.0005
7.1100	2.6315E-02	0.0004	12.3990	1.9018E-02	0.0004	16.0290	9.8711E-03	0.0005
7.4640	2.6169E-02	0.0004	12.6060	1.8574E-02	0.0004	16.1890	9.3874E-03	0.0006
7.8020	2.5968E-02	0.0004	12.8090	1.8118E-02	0.0004	16.3480	8.8872E-03	0.0006
8.1260	2.5715E-02	0.0004	13.0080	1.7678E-02	0.0004	16.5050	8.3929E-03	0.0006
8.4380	2.5431E-02	0.0004	13.2050	1.7237E-02	0.0004	16.6600	7.8807E-03	0.0006
8.7380	2.5103E-02	0.0004	13.3990	1.6790E-02	0.0004	16.8140	7.3704E-03	0.0006
9.0280	2.4761E-02	0.0004	13.5900	1.6361E-02	0.0004	16.9670	6.8435E-03	0.0006
9.3100	2.4404E-02	0.0004	13.7790	1.5903E-02	0.0004	17.1190	6.3075E-03	0.0007
9.5830	2.4042E-02	0.0004	13.9650	1.5451E-02	0.0005	17.2690	5.7566E-03	0.0007
9.8480	2.3656E-02	0.0004	14.1480	1.4999E-02	0.0005	17.4170	5.1802E-03	0.0007
10.1070	2.3272E-02	0.0004	14.3300	1.4552E-02	0.0005	17.5650	4.5851E-03	0.0007
10.3590	2.2866E-02	0.0004	14.5080	1.4090E-02	0.0005	17.7110	3.9647E-03	0.0008
10.6050	2.2457E-02	0.0004	14.6850	1.3627E-02	0.0005	17.8560	3.3041E-03	0.0008
10.8460	2.2042E-02	0.0004	14.8600	1.3167E-02	0.0005	18.0000	2.5603E-03	0.0008
3.8 (minimum boundary)			z=116.449			to z=116.948		
4.4270	2.1197E-02	0.0005	11.0810	2.1603E-02	0.0004	15.0320	1.2704E-02	0.0005
4.9760	2.4174E-02	0.0005	11.3110	2.1181E-02	0.0004	15.2030	1.2238E-02	0.0005
5.4700	2.5418E-02	0.0005	11.5370	2.0755E-02	0.0004	15.3720	1.1778E-02	0.0005
5.9230	2.6009E-02	0.0005	11.7590	2.0325E-02	0.0004	15.5390	1.1305E-02	0.0005
6.3430	2.6297E-02	0.0004	11.9760	1.9900E-02	0.0004	15.7040	1.0838E-02	0.0005
6.7380	2.6371E-02	0.0004	12.1890	1.9459E-02	0.0004	15.8670	1.0364E-02	0.0005
7.1100	2.6303E-02	0.0004	12.3990	1.9016E-02	0.0004	16.0290	9.8891E-03	0.0005
7.4640	2.6179E-02	0.0004	12.6060	1.8568E-02	0.0004	16.1890	9.3977E-03	0.0006
7.8020	2.5974E-02	0.0004	12.8090	1.8121E-02	0.0004	16.3480	8.8997E-03	0.0006
8.1260	2.5721E-02	0.0004	13.0080	1.7691E-02	0.0004	16.5050	8.3904E-03	0.0006
8.4380	2.5441E-02	0.0004	13.2050	1.7243E-02	0.0004	16.6600	7.8868E-03	0.0006
8.7380	2.5103E-02	0.0004	13.3990	1.6794E-02	0.0004	16.8140	7.3730E-03	0.0006
9.0280	2.4762E-02	0.0004	13.5900	1.6346E-02	0.0004	16.9670	6.8455E-03	0.0006
9.3100	2.4394E-02	0.0004	13.7790	1.5906E-02	0.0004	17.1190	6.3066E-03	0.0006
9.5830	2.4039E-02	0.0004	13.9650	1.5447E-02	0.0005	17.2690	5.7483E-03	0.0007
9.8480	2.3664E-02	0.0004	14.1480	1.5004E-02	0.0005	17.4170	5.1763E-03	0.0007
10.1070	2.3264E-02	0.0004	14.3300	1.4550E-02	0.0005	17.5650	4.5886E-03	0.0007
10.3590	2.2863E-02	0.0004	14.5080	1.4078E-02	0.0005	17.7110	3.9659E-03	0.0008
10.6050	2.2451E-02	0.0004	14.6850	1.3630E-02	0.0005	17.8560	3.3027E-03	0.0008
10.8460	2.2037E-02	0.0004	14.8600	1.3169E-02	0.0005	18.0000	2.5566E-03	0.0008
3.8 (minimum boundary)			z=116.948			to z=117.446		
4.4270	2.1202E-02	0.0005	11.0810	2.1596E-02	0.0004	15.0320	1.2707E-02	0.0005
4.9760	2.4163E-02	0.0005	11.3110	2.1184E-02	0.0004	15.2030	1.2243E-02	0.0005
5.4700	2.5414E-02	0.0005	11.5370	2.0753E-02	0.0004	15.3720	1.1774E-02	0.0005
5.9230	2.6018E-02	0.0005	11.7590	2.0333E-02	0.0004	15.5390	1.1306E-02	0.0005
6.3430	2.6314E-02	0.0004	11.9760	1.9894E-02	0.0004	15.7040	1.0831E-02	0.0005
6.7380	2.6376E-02	0.0004	12.1890	1.9453E-02	0.0004	15.8670	1.0362E-02	0.0005
7.1100	2.6321E-02	0.0004	12.3990	1.9007E-02	0.0004	16.0290	9.8791E-03	0.0005
7.4640	2.6187E-02	0.0004	12.6060	1.8565E-02	0.0004	16.1890	9.3889E-03	0.0006
7.8020	2.6001E-02	0.0004	12.8090	1.8120E-02	0.0004	16.3480	8.8971E-03	0.0006
8.1260	2.5731E-02	0.0004	13.0080	1.7686E-02	0.0004	16.5050	8.3935E-03	0.0006

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
8.4380	2.5446E-02	0.0004	13.2050	1.7236E-02	0.0004	16.6600	7.8860E-03	0.0006
8.7380	2.5113E-02	0.0004	13.3990	1.6798E-02	0.0004	16.8140	7.3686E-03	0.0006
9.0280	2.4784E-02	0.0004	13.5900	1.6340E-02	0.0004	16.9670	6.8394E-03	0.0006
9.3100	2.4417E-02	0.0004	13.7790	1.5897E-02	0.0004	17.1190	6.3047E-03	0.0006
9.5830	2.4041E-02	0.0004	13.9650	1.5440E-02	0.0004	17.2690	5.7526E-03	0.0007
9.8480	2.3648E-02	0.0004	14.1480	1.4991E-02	0.0005	17.4170	5.1778E-03	0.0007
10.1070	2.3257E-02	0.0004	14.3300	1.4541E-02	0.0005	17.5650	4.5855E-03	0.0007
10.3590	2.2854E-02	0.0004	14.5080	1.4088E-02	0.0005	17.7110	3.9680E-03	0.0008
10.6050	2.2441E-02	0.0004	14.6850	1.3627E-02	0.0005	17.8560	3.3036E-03	0.0008
10.8460	2.2028E-02	0.0004	14.8600	1.3168E-02	0.0005	18.0000	2.5605E-03	0.0008
3.8 (minimum boundary)			z=117.446			to z=117.945		
4.4270	2.1186E-02	0.0005	11.0810	2.1617E-02	0.0004	15.0320	1.2716E-02	0.0005
4.9760	2.4162E-02	0.0005	11.3110	2.1191E-02	0.0004	15.2030	1.2251E-02	0.0005
5.4700	2.5413E-02	0.0005	11.5370	2.0752E-02	0.0004	15.3720	1.1786E-02	0.0005
5.9230	2.6013E-02	0.0005	11.7590	2.0312E-02	0.0004	15.5390	1.1305E-02	0.0005
6.3430	2.6312E-02	0.0004	11.9760	1.9886E-02	0.0004	15.7040	1.0839E-02	0.0005
6.7380	2.6389E-02	0.0004	12.1890	1.9454E-02	0.0004	15.8670	1.0359E-02	0.0005
7.1100	2.6310E-02	0.0004	12.3990	1.9018E-02	0.0004	16.0290	9.8844E-03	0.0005
7.4640	2.6191E-02	0.0004	12.6060	1.8569E-02	0.0004	16.1890	9.3924E-03	0.0006
7.8020	2.5982E-02	0.0004	12.8090	1.8135E-02	0.0004	16.3480	8.8930E-03	0.0006
8.1260	2.5729E-02	0.0004	13.0080	1.7690E-02	0.0004	16.5050	8.3956E-03	0.0006
8.4380	2.5434E-02	0.0004	13.2050	1.7237E-02	0.0004	16.6600	7.8854E-03	0.0006
8.7380	2.5129E-02	0.0004	13.3990	1.6791E-02	0.0004	16.8140	7.3652E-03	0.0006
9.0280	2.4765E-02	0.0004	13.5900	1.6341E-02	0.0004	16.9670	6.8349E-03	0.0006
9.3100	2.4421E-02	0.0004	13.7790	1.5888E-02	0.0004	17.1190	6.3041E-03	0.0006
9.5830	2.4047E-02	0.0004	13.9650	1.5441E-02	0.0004	17.2690	5.7464E-03	0.0007
9.8480	2.3663E-02	0.0004	14.1480	1.4990E-02	0.0005	17.4170	5.1766E-03	0.0007
10.1070	2.3263E-02	0.0004	14.3300	1.4531E-02	0.0005	17.5650	4.5855E-03	0.0007
10.3590	2.2849E-02	0.0004	14.5080	1.4089E-02	0.0005	17.7110	3.9628E-03	0.0008
10.6050	2.2440E-02	0.0004	14.6850	1.3628E-02	0.0005	17.8560	3.3020E-03	0.0008
10.8460	2.2028E-02	0.0004	14.8600	1.3170E-02	0.0005	18.0000	2.5592E-03	0.0008
3.8 (minimum boundary)			z=117.945			to z=118.443		
4.4270	2.1184E-02	0.0005	11.0810	2.1619E-02	0.0004	15.0320	1.2698E-02	0.0005
4.9760	2.4151E-02	0.0005	11.3110	2.1185E-02	0.0004	15.2030	1.2246E-02	0.0005
5.4700	2.5392E-02	0.0005	11.5370	2.0748E-02	0.0004	15.3720	1.1786E-02	0.0005
5.9230	2.6007E-02	0.0005	11.7590	2.0325E-02	0.0004	15.5390	1.1324E-02	0.0005
6.3430	2.6303E-02	0.0004	11.9760	1.9887E-02	0.0004	15.7040	1.0846E-02	0.0005
6.7380	2.6362E-02	0.0004	12.1890	1.9455E-02	0.0004	15.8670	1.0364E-02	0.0005
7.1100	2.6309E-02	0.0004	12.3990	1.9012E-02	0.0004	16.0290	9.8846E-03	0.0005
7.4640	2.6181E-02	0.0004	12.6060	1.8575E-02	0.0004	16.1890	9.3938E-03	0.0006
7.8020	2.5967E-02	0.0004	12.8090	1.8133E-02	0.0004	16.3480	8.9006E-03	0.0006
8.1260	2.5704E-02	0.0004	13.0080	1.7694E-02	0.0004	16.5050	8.4029E-03	0.0006
8.4380	2.5433E-02	0.0004	13.2050	1.7249E-02	0.0004	16.6600	7.8991E-03	0.0006
8.7380	2.5111E-02	0.0004	13.3990	1.6802E-02	0.0004	16.8140	7.3788E-03	0.0006
9.0280	2.4784E-02	0.0004	13.5900	1.6342E-02	0.0004	16.9670	6.8478E-03	0.0006
9.3100	2.4416E-02	0.0004	13.7790	1.5887E-02	0.0004	17.1190	6.3031E-03	0.0006
9.5830	2.4048E-02	0.0004	13.9650	1.5446E-02	0.0004	17.2690	5.7508E-03	0.0007
9.8480	2.3664E-02	0.0004	14.1480	1.4995E-02	0.0005	17.4170	5.1767E-03	0.0007
10.1070	2.3267E-02	0.0004	14.3300	1.4530E-02	0.0005	17.5650	4.5796E-03	0.0007
10.3590	2.2856E-02	0.0004	14.5080	1.4089E-02	0.0005	17.7110	3.9636E-03	0.0008
10.6050	2.2458E-02	0.0004	14.6850	1.3624E-02	0.0005	17.8560	3.3011E-03	0.0008
10.8460	2.2037E-02	0.0004	14.8600	1.3161E-02	0.0005	18.0000	2.5612E-03	0.0008

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
3.8 (minimum boundary)			z=118.443			to z=118.942		
4.4270	2.1199E-02	0.0005	11.0810	2.1612E-02	0.0004	15.0320	1.2714E-02	0.0005
4.9760	2.4148E-02	0.0005	11.3110	2.1188E-02	0.0004	15.2030	1.2248E-02	0.0005
5.4700	2.5411E-02	0.0005	11.5370	2.0766E-02	0.0004	15.3720	1.1781E-02	0.0005
5.9230	2.6025E-02	0.0005	11.7590	2.0337E-02	0.0004	15.5390	1.1315E-02	0.0005
6.3430	2.6298E-02	0.0004	11.9760	1.9896E-02	0.0004	15.7040	1.0847E-02	0.0005
6.7380	2.6383E-02	0.0004	12.1890	1.9455E-02	0.0004	15.8670	1.0365E-02	0.0005
7.1100	2.6328E-02	0.0004	12.3990	1.9020E-02	0.0004	16.0290	9.8844E-03	0.0005
7.4640	2.6171E-02	0.0004	12.6060	1.8573E-02	0.0004	16.1890	9.3934E-03	0.0006
7.8020	2.5955E-02	0.0004	12.8090	1.8120E-02	0.0004	16.3480	8.9021E-03	0.0006
8.1260	2.5716E-02	0.0004	13.0080	1.7679E-02	0.0004	16.5050	8.4007E-03	0.0006
8.4380	2.5439E-02	0.0004	13.2050	1.7249E-02	0.0004	16.6600	7.8942E-03	0.0006
8.7380	2.5115E-02	0.0004	13.3990	1.6793E-02	0.0004	16.8140	7.3698E-03	0.0006
9.0280	2.4767E-02	0.0004	13.5900	1.6332E-02	0.0004	16.9670	6.8421E-03	0.0006
9.3100	2.4416E-02	0.0004	13.7790	1.5889E-02	0.0004	17.1190	6.3038E-03	0.0006
9.5830	2.4032E-02	0.0004	13.9650	1.5450E-02	0.0004	17.2690	5.7510E-03	0.0007
9.8480	2.3648E-02	0.0004	14.1480	1.4990E-02	0.0005	17.4170	5.1798E-03	0.0007
10.1070	2.3265E-02	0.0004	14.3300	1.4536E-02	0.0005	17.5650	4.5873E-03	0.0007
10.3590	2.2861E-02	0.0004	14.5080	1.4075E-02	0.0005	17.7110	3.9634E-03	0.0008
10.6050	2.2443E-02	0.0004	14.6850	1.3625E-02	0.0005	17.8560	3.3017E-03	0.0008
10.8460	2.2030E-02	0.0004	14.8600	1.3161E-02	0.0005	18.0000	2.5608E-03	0.0008
3.8 (minimum boundary)			z=118.942			to z=119.440		
4.4270	2.1200E-02	0.0005	11.0810	2.1614E-02	0.0004	15.0320	1.2709E-02	0.0005
4.9760	2.4124E-02	0.0005	11.3110	2.1192E-02	0.0004	15.2030	1.2244E-02	0.0005
5.4700	2.5416E-02	0.0005	11.5370	2.0763E-02	0.0004	15.3720	1.1781E-02	0.0005
5.9230	2.6034E-02	0.0005	11.7590	2.0329E-02	0.0004	15.5390	1.1313E-02	0.0005
6.3430	2.6323E-02	0.0004	11.9760	1.9891E-02	0.0004	15.7040	1.0831E-02	0.0005
6.7380	2.6387E-02	0.0004	12.1890	1.9454E-02	0.0004	15.8670	1.0356E-02	0.0005
7.1100	2.6329E-02	0.0004	12.3990	1.9023E-02	0.0004	16.0290	9.8737E-03	0.0005
7.4640	2.6153E-02	0.0004	12.6060	1.8577E-02	0.0004	16.1890	9.3862E-03	0.0006
7.8020	2.5946E-02	0.0004	12.8090	1.8125E-02	0.0004	16.3480	8.8999E-03	0.0006
8.1260	2.5707E-02	0.0004	13.0080	1.7677E-02	0.0004	16.5050	8.3989E-03	0.0006
8.4380	2.5430E-02	0.0004	13.2050	1.7239E-02	0.0004	16.6600	7.8893E-03	0.0006
8.7380	2.5099E-02	0.0004	13.3990	1.6795E-02	0.0004	16.8140	7.3710E-03	0.0006
9.0280	2.4749E-02	0.0004	13.5900	1.6346E-02	0.0004	16.9670	6.8462E-03	0.0006
9.3100	2.4402E-02	0.0004	13.7790	1.5900E-02	0.0004	17.1190	6.3005E-03	0.0006
9.5830	2.4040E-02	0.0004	13.9650	1.5456E-02	0.0004	17.2690	5.7514E-03	0.0007
9.8480	2.3658E-02	0.0004	14.1480	1.5006E-02	0.0005	17.4170	5.1815E-03	0.0007
10.1070	2.3262E-02	0.0004	14.3300	1.4546E-02	0.0005	17.5650	4.5881E-03	0.0007
10.3590	2.2862E-02	0.0004	14.5080	1.4085E-02	0.0005	17.7110	3.9646E-03	0.0008
10.6050	2.2447E-02	0.0004	14.6850	1.3624E-02	0.0005	17.8560	3.3036E-03	0.0008
10.8460	2.2045E-02	0.0004	14.8600	1.3170E-02	0.0005	18.0000	2.5627E-03	0.0008
3.8 (minimum boundary)			z=119.440			to z=119.939		
4.4270	2.1195E-02	0.0005	11.0810	2.1608E-02	0.0004	15.0320	1.2713E-02	0.0005
4.9760	2.4171E-02	0.0005	11.3110	2.1190E-02	0.0004	15.2030	1.2253E-02	0.0005
5.4700	2.5412E-02	0.0005	11.5370	2.0769E-02	0.0004	15.3720	1.1776E-02	0.0005
5.9230	2.6019E-02	0.0005	11.7590	2.0307E-02	0.0004	15.5390	1.1307E-02	0.0005
6.3430	2.6290E-02	0.0004	11.9760	1.9889E-02	0.0004	15.7040	1.0830E-02	0.0005
6.7380	2.6369E-02	0.0004	12.1890	1.9451E-02	0.0004	15.8670	1.0356E-02	0.0005
7.1100	2.6319E-02	0.0004	12.3990	1.9007E-02	0.0004	16.0290	9.8825E-03	0.0005
7.4640	2.6167E-02	0.0004	12.6060	1.8575E-02	0.0004	16.1890	9.3914E-03	0.0006
7.8020	2.5957E-02	0.0004	12.8090	1.8129E-02	0.0004	16.3480	8.8991E-03	0.0006

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
8.1260	2.5709E-02	0.0004	13.0080	1.7678E-02	0.0004	16.5050	8.3973E-03	0.0006
8.4380	2.5423E-02	0.0004	13.2050	1.7242E-02	0.0004	16.6600	7.8879E-03	0.0006
8.7380	2.5098E-02	0.0004	13.3990	1.6804E-02	0.0004	16.8140	7.3743E-03	0.0006
9.0280	2.4759E-02	0.0004	13.5900	1.6351E-02	0.0004	16.9670	6.8489E-03	0.0006
9.3100	2.4405E-02	0.0004	13.7790	1.5900E-02	0.0004	17.1190	6.3068E-03	0.0006
9.5830	2.4035E-02	0.0004	13.9650	1.5453E-02	0.0004	17.2690	5.7552E-03	0.0007
9.8480	2.3670E-02	0.0004	14.1480	1.5001E-02	0.0005	17.4170	5.1821E-03	0.0007
10.1070	2.3272E-02	0.0004	14.3300	1.4549E-02	0.0005	17.5650	4.5872E-03	0.0007
10.3590	2.2855E-02	0.0004	14.5080	1.4090E-02	0.0005	17.7110	3.9643E-03	0.0008
10.6050	2.2457E-02	0.0004	14.6850	1.3630E-02	0.0005	17.8560	3.3030E-03	0.0008
10.8460	2.2049E-02	0.0004	14.8600	1.3169E-02	0.0005	18.0000	2.5615E-03	0.0008
3.8 (minimum boundary)			z=119.939			to z=120.437		
4.4270	2.1198E-02	0.0005	11.0810	2.1582E-02	0.0004	15.0320	1.2710E-02	0.0005
4.9760	2.4159E-02	0.0005	11.3110	2.1166E-02	0.0004	15.2030	1.2254E-02	0.0005
5.4700	2.5409E-02	0.0005	11.5370	2.0745E-02	0.0004	15.3720	1.1788E-02	0.0005
5.9230	2.6027E-02	0.0005	11.7590	2.0313E-02	0.0004	15.5390	1.1317E-02	0.0005
6.3430	2.6293E-02	0.0004	11.9760	1.9883E-02	0.0004	15.7040	1.0838E-02	0.0005
6.7380	2.6373E-02	0.0004	12.1890	1.9458E-02	0.0004	15.8670	1.0368E-02	0.0005
7.1100	2.6322E-02	0.0004	12.3990	1.9013E-02	0.0004	16.0290	9.8823E-03	0.0005
7.4640	2.6169E-02	0.0004	12.6060	1.8583E-02	0.0004	16.1890	9.3889E-03	0.0006
7.8020	2.5970E-02	0.0004	12.8090	1.8138E-02	0.0004	16.3480	8.8969E-03	0.0006
8.1260	2.5710E-02	0.0004	13.0080	1.7695E-02	0.0004	16.5050	8.4004E-03	0.0006
8.4380	2.5415E-02	0.0004	13.2050	1.7251E-02	0.0004	16.6600	7.8890E-03	0.0006
8.7380	2.5119E-02	0.0004	13.3990	1.6802E-02	0.0004	16.8140	7.3730E-03	0.0006
9.0280	2.4768E-02	0.0004	13.5900	1.6350E-02	0.0004	16.9670	6.8391E-03	0.0006
9.3100	2.4404E-02	0.0004	13.7790	1.5902E-02	0.0004	17.1190	6.3045E-03	0.0006
9.5830	2.4048E-02	0.0004	13.9650	1.5456E-02	0.0004	17.2690	5.7533E-03	0.0007
9.8480	2.3658E-02	0.0004	14.1480	1.4996E-02	0.0005	17.4170	5.1791E-03	0.0007
10.1070	2.3257E-02	0.0004	14.3300	1.4542E-02	0.0005	17.5650	4.5860E-03	0.0007
10.3590	2.2851E-02	0.0004	14.5080	1.4098E-02	0.0005	17.7110	3.9668E-03	0.0008
10.6050	2.2440E-02	0.0004	14.6850	1.3644E-02	0.0005	17.8560	3.3011E-03	0.0008
10.8460	2.2024E-02	0.0004	14.8600	1.3176E-02	0.0005	18.0000	2.5573E-03	0.0008
3.8 (minimum boundary)			z=120.437			to z=120.936		
4.4270	2.1184E-02	0.0005	11.0810	2.1603E-02	0.0004	15.0320	1.2710E-02	0.0005
4.9760	2.4152E-02	0.0005	11.3110	2.1178E-02	0.0004	15.2030	1.2243E-02	0.0005
5.4700	2.5424E-02	0.0005	11.5370	2.0745E-02	0.0004	15.3720	1.1772E-02	0.0005
5.9230	2.6034E-02	0.0005	11.7590	2.0312E-02	0.0004	15.5390	1.1299E-02	0.0005
6.3430	2.6301E-02	0.0004	11.9760	1.9877E-02	0.0004	15.7040	1.0827E-02	0.0005
6.7380	2.6391E-02	0.0004	12.1890	1.9446E-02	0.0004	15.8670	1.0353E-02	0.0005
7.1100	2.6336E-02	0.0004	12.3990	1.9023E-02	0.0004	16.0290	9.8800E-03	0.0005
7.4640	2.6196E-02	0.0004	12.6060	1.8579E-02	0.0004	16.1890	9.3911E-03	0.0006
7.8020	2.5971E-02	0.0004	12.8090	1.8140E-02	0.0004	16.3480	8.9062E-03	0.0006
8.1260	2.5711E-02	0.0004	13.0080	1.7690E-02	0.0004	16.5050	8.4025E-03	0.0006
8.4380	2.5434E-02	0.0004	13.2050	1.7240E-02	0.0004	16.6600	7.8981E-03	0.0006
8.7380	2.5106E-02	0.0004	13.3990	1.6793E-02	0.0004	16.8140	7.3810E-03	0.0006
9.0280	2.4764E-02	0.0004	13.5900	1.6347E-02	0.0004	16.9670	6.8488E-03	0.0006
9.3100	2.4410E-02	0.0004	13.7790	1.5902E-02	0.0004	17.1190	6.3111E-03	0.0006
9.5830	2.4042E-02	0.0004	13.9650	1.5451E-02	0.0004	17.2690	5.7532E-03	0.0007
9.8480	2.3649E-02	0.0004	14.1480	1.4993E-02	0.0005	17.4170	5.1830E-03	0.0007
10.1070	2.3265E-02	0.0004	14.3300	1.4542E-02	0.0005	17.5650	4.5889E-03	0.0007
10.3590	2.2854E-02	0.0004	14.5080	1.4083E-02	0.0005	17.7110	3.9663E-03	0.0008
10.6050	2.2440E-02	0.0004	14.6850	1.3629E-02	0.0005	17.8560	3.3044E-03	0.0008

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
10.8460	2.2012E-02	0.0004	14.8600	1.3169E-02	0.0005	18.0000	2.5615E-03	0.0008
3.8 (minimum boundary)			z=120.936			to z=121.434		
4.4270	2.1181E-02	0.0005	11.0810	2.1596E-02	0.0004	15.0320	1.2717E-02	0.0005
4.9760	2.4142E-02	0.0005	11.3110	2.1171E-02	0.0004	15.2030	1.2248E-02	0.0005
5.4700	2.5424E-02	0.0005	11.5370	2.0744E-02	0.0004	15.3720	1.1774E-02	0.0005
5.9230	2.6031E-02	0.0005	11.7590	2.0315E-02	0.0004	15.5390	1.1310E-02	0.0005
6.3430	2.6314E-02	0.0004	11.9760	1.9882E-02	0.0004	15.7040	1.0839E-02	0.0005
6.7380	2.6376E-02	0.0004	12.1890	1.9444E-02	0.0004	15.8670	1.0365E-02	0.0005
7.1100	2.6320E-02	0.0004	12.3990	1.9013E-02	0.0004	16.0290	9.8747E-03	0.0005
7.4640	2.6179E-02	0.0004	12.6060	1.8573E-02	0.0004	16.1890	9.3974E-03	0.0006
7.8020	2.5957E-02	0.0004	12.8090	1.8135E-02	0.0004	16.3480	8.8967E-03	0.0006
8.1260	2.5691E-02	0.0004	13.0080	1.7684E-02	0.0004	16.5050	8.4027E-03	0.0006
8.4380	2.5410E-02	0.0004	13.2050	1.7242E-02	0.0004	16.6600	7.8982E-03	0.0006
8.7380	2.5105E-02	0.0004	13.3990	1.6796E-02	0.0004	16.8140	7.3782E-03	0.0006
9.0280	2.4774E-02	0.0004	13.5900	1.6349E-02	0.0004	16.9670	6.8479E-03	0.0006
9.3100	2.4413E-02	0.0004	13.7790	1.5903E-02	0.0004	17.1190	6.3150E-03	0.0006
9.5830	2.4047E-02	0.0004	13.9650	1.5459E-02	0.0004	17.2690	5.7582E-03	0.0007
9.8480	2.3669E-02	0.0004	14.1480	1.5001E-02	0.0005	17.4170	5.1854E-03	0.0007
10.1070	2.3273E-02	0.0004	14.3300	1.4542E-02	0.0005	17.5650	4.5908E-03	0.0007
10.3590	2.2863E-02	0.0004	14.5080	1.4091E-02	0.0005	17.7110	3.9692E-03	0.0008
10.6050	2.2438E-02	0.0004	14.6850	1.3627E-02	0.0005	17.8560	3.3019E-03	0.0008
10.8460	2.2024E-02	0.0004	14.8600	1.3173E-02	0.0005	18.0000	2.5626E-03	0.0008
3.8 (minimum boundary)			z=121.434			to z=121.932		
4.4270	2.1204E-02	0.0005	11.0810	2.1599E-02	0.0004	15.0320	1.2709E-02	0.0005
4.9760	2.4130E-02	0.0005	11.3110	2.1185E-02	0.0004	15.2030	1.2251E-02	0.0005
5.4700	2.5417E-02	0.0005	11.5370	2.0747E-02	0.0004	15.3720	1.1781E-02	0.0005
5.9230	2.6035E-02	0.0005	11.7590	2.0328E-02	0.0004	15.5390	1.1313E-02	0.0005
6.3430	2.6319E-02	0.0004	11.9760	1.9888E-02	0.0004	15.7040	1.0841E-02	0.0005
6.7380	2.6391E-02	0.0004	12.1890	1.9452E-02	0.0004	15.8670	1.0360E-02	0.0005
7.1100	2.6325E-02	0.0004	12.3990	1.9008E-02	0.0004	16.0290	9.8751E-03	0.0005
7.4640	2.6176E-02	0.0004	12.6060	1.8575E-02	0.0004	16.1890	9.3857E-03	0.0006
7.8020	2.5969E-02	0.0004	12.8090	1.8136E-02	0.0004	16.3480	8.8916E-03	0.0006
8.1260	2.5710E-02	0.0004	13.0080	1.7689E-02	0.0004	16.5050	8.3962E-03	0.0006
8.4380	2.5415E-02	0.0004	13.2050	1.7248E-02	0.0004	16.6600	7.8879E-03	0.0006
8.7380	2.5096E-02	0.0004	13.3990	1.6793E-02	0.0004	16.8140	7.3731E-03	0.0006
9.0280	2.4770E-02	0.0004	13.5900	1.6346E-02	0.0004	16.9670	6.8530E-03	0.0006
9.3100	2.4409E-02	0.0004	13.7790	1.5907E-02	0.0004	17.1190	6.3052E-03	0.0006
9.5830	2.4042E-02	0.0004	13.9650	1.5449E-02	0.0004	17.2690	5.7473E-03	0.0007
9.8480	2.3657E-02	0.0004	14.1480	1.4987E-02	0.0005	17.4170	5.1787E-03	0.0007
10.1070	2.3279E-02	0.0004	14.3300	1.4547E-02	0.0005	17.5650	4.5880E-03	0.0007
10.3590	2.2856E-02	0.0004	14.5080	1.4086E-02	0.0005	17.7110	3.9683E-03	0.0008
10.6050	2.2436E-02	0.0004	14.6850	1.3630E-02	0.0005	17.8560	3.3030E-03	0.0008
10.8460	2.2020E-02	0.0004	14.8600	1.3172E-02	0.0005	18.0000	2.5613E-03	0.0008
3.8 (minimum boundary)			z=121.932			to z=122.431		
4.4270	2.1212E-02	0.0005	11.0810	2.1610E-02	0.0004	15.0320	1.2712E-02	0.0005
4.9760	2.4142E-02	0.0005	11.3110	2.1196E-02	0.0004	15.2030	1.2259E-02	0.0005
5.4700	2.5406E-02	0.0005	11.5370	2.0766E-02	0.0004	15.3720	1.1789E-02	0.0005
5.9230	2.6020E-02	0.0005	11.7590	2.0324E-02	0.0004	15.5390	1.1324E-02	0.0005
6.3430	2.6331E-02	0.0004	11.9760	1.9892E-02	0.0004	15.7040	1.0837E-02	0.0005
6.7380	2.6388E-02	0.0004	12.1890	1.9446E-02	0.0004	15.8670	1.0361E-02	0.0005
7.1100	2.6336E-02	0.0004	12.3990	1.9005E-02	0.0004	16.0290	9.8736E-03	0.0005
7.4640	2.6172E-02	0.0004	12.6060	1.8564E-02	0.0004	16.1890	9.3964E-03	0.0006

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
7.8020	2.5955E-02	0.0004	12.8090	1.8128E-02	0.0004	16.3480	8.9022E-03	0.0006
8.1260	2.5696E-02	0.0004	13.0080	1.7687E-02	0.0004	16.5050	8.3982E-03	0.0006
8.4380	2.5412E-02	0.0004	13.2050	1.7238E-02	0.0004	16.6600	7.8941E-03	0.0006
8.7380	2.5094E-02	0.0004	13.3990	1.6787E-02	0.0004	16.8140	7.3708E-03	0.0006
9.0280	2.4759E-02	0.0004	13.5900	1.6353E-02	0.0004	16.9670	6.8443E-03	0.0006
9.3100	2.4406E-02	0.0004	13.7790	1.5897E-02	0.0004	17.1190	6.3056E-03	0.0006
9.5830	2.4034E-02	0.0004	13.9650	1.5441E-02	0.0004	17.2690	5.7489E-03	0.0007
9.8480	2.3649E-02	0.0004	14.1480	1.4995E-02	0.0005	17.4170	5.1821E-03	0.0007
10.1070	2.3258E-02	0.0004	14.3300	1.4553E-02	0.0005	17.5650	4.5832E-03	0.0007
10.3590	2.2856E-02	0.0004	14.5080	1.4091E-02	0.0005	17.7110	3.9641E-03	0.0008
10.6050	2.2453E-02	0.0004	14.6850	1.3634E-02	0.0005	17.8560	3.2994E-03	0.0008
10.8460	2.2038E-02	0.0004	14.8600	1.3173E-02	0.0005	18.0000	2.5573E-03	0.0008
3.8 (minimum boundary)								
			z=122.431			to z=122.929		
4.4270	2.1187E-02	0.0005	11.0810	2.1608E-02	0.0004	15.0320	1.2706E-02	0.0005
4.9760	2.4148E-02	0.0005	11.3110	2.1186E-02	0.0004	15.2030	1.2247E-02	0.0005
5.4700	2.5407E-02	0.0005	11.5370	2.0751E-02	0.0004	15.3720	1.1777E-02	0.0005
5.9230	2.6036E-02	0.0005	11.7590	2.0334E-02	0.0004	15.5390	1.1312E-02	0.0005
6.3430	2.6310E-02	0.0004	11.9760	1.9890E-02	0.0004	15.7040	1.0844E-02	0.0005
6.7380	2.6383E-02	0.0004	12.1890	1.9450E-02	0.0004	15.8670	1.0363E-02	0.0005
7.1100	2.6333E-02	0.0004	12.3990	1.9016E-02	0.0004	16.0290	9.8773E-03	0.0005
7.4640	2.6180E-02	0.0004	12.6060	1.8578E-02	0.0004	16.1890	9.3922E-03	0.0006
7.8020	2.5971E-02	0.0004	12.8090	1.8131E-02	0.0004	16.3480	8.8967E-03	0.0006
8.1260	2.5714E-02	0.0004	13.0080	1.7699E-02	0.0004	16.5050	8.3984E-03	0.0006
8.4380	2.5416E-02	0.0004	13.2050	1.7251E-02	0.0004	16.6600	7.8893E-03	0.0006
8.7380	2.5100E-02	0.0004	13.3990	1.6802E-02	0.0004	16.8140	7.3724E-03	0.0006
9.0280	2.4753E-02	0.0004	13.5900	1.6350E-02	0.0004	16.9670	6.8452E-03	0.0006
9.3100	2.4400E-02	0.0004	13.7790	1.5910E-02	0.0004	17.1190	6.3086E-03	0.0006
9.5830	2.4023E-02	0.0004	13.9650	1.5455E-02	0.0004	17.2690	5.7546E-03	0.0007
9.8480	2.3644E-02	0.0004	14.1480	1.5000E-02	0.0005	17.4170	5.1807E-03	0.0007
10.1070	2.3257E-02	0.0004	14.3300	1.4539E-02	0.0005	17.5650	4.5876E-03	0.0007
10.3590	2.2870E-02	0.0004	14.5080	1.4089E-02	0.0005	17.7110	3.9630E-03	0.0008
10.6050	2.2441E-02	0.0004	14.6850	1.3632E-02	0.0005	17.8560	3.2990E-03	0.0008
10.8460	2.2023E-02	0.0004	14.8600	1.3163E-02	0.0005	18.0000	2.5570E-03	0.0008
3.8 (minimum boundary)								
			z=122.929			to z=123.428		
4.4270	2.1182E-02	0.0005	11.0810	2.1616E-02	0.0004	15.0320	1.2710E-02	0.0005
4.9760	2.4129E-02	0.0005	11.3110	2.1175E-02	0.0004	15.2030	1.2243E-02	0.0005
5.4700	2.5400E-02	0.0005	11.5370	2.0743E-02	0.0004	15.3720	1.1779E-02	0.0005
5.9230	2.6031E-02	0.0005	11.7590	2.0321E-02	0.0004	15.5390	1.1315E-02	0.0005
6.3430	2.6300E-02	0.0004	11.9760	1.9881E-02	0.0004	15.7040	1.0840E-02	0.0005
6.7380	2.6385E-02	0.0004	12.1890	1.9454E-02	0.0004	15.8670	1.0356E-02	0.0005
7.1100	2.6319E-02	0.0004	12.3990	1.9014E-02	0.0004	16.0290	9.8833E-03	0.0005
7.4640	2.6170E-02	0.0004	12.6060	1.8582E-02	0.0004	16.1890	9.3883E-03	0.0006
7.8020	2.5979E-02	0.0004	12.8090	1.8139E-02	0.0004	16.3480	8.8991E-03	0.0006
8.1260	2.5726E-02	0.0004	13.0080	1.7704E-02	0.0004	16.5050	8.3932E-03	0.0006
8.4380	2.5430E-02	0.0004	13.2050	1.7248E-02	0.0004	16.6600	7.8883E-03	0.0006
8.7380	2.5117E-02	0.0004	13.3990	1.6794E-02	0.0004	16.8140	7.3693E-03	0.0006
9.0280	2.4777E-02	0.0004	13.5900	1.6347E-02	0.0004	16.9670	6.8399E-03	0.0006
9.3100	2.4410E-02	0.0004	13.7790	1.5901E-02	0.0004	17.1190	6.3059E-03	0.0006
9.5830	2.4038E-02	0.0004	13.9650	1.5450E-02	0.0005	17.2690	5.7477E-03	0.0007
9.8480	2.3654E-02	0.0004	14.1480	1.5002E-02	0.0005	17.4170	5.1802E-03	0.0007
10.1070	2.3263E-02	0.0004	14.3300	1.4538E-02	0.0005	17.5650	4.5890E-03	0.0007
10.3590	2.2863E-02	0.0004	14.5080	1.4082E-02	0.0005	17.7110	3.9696E-03	0.0008

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
10.6050	2.2448E-02	0.0004	14.6850	1.3623E-02	0.0005	17.8560	3.3045E-03	0.0008
10.8460	2.2035E-02	0.0004	14.8600	1.3166E-02	0.0005	18.0000	2.5641E-03	0.0008
3.8 (minimum boundary)				z=123.428			to z=123.926	
4.4270	2.1198E-02	0.0005	11.0810	2.1624E-02	0.0004	15.0320	1.2700E-02	0.0005
4.9760	2.4136E-02	0.0005	11.3110	2.1178E-02	0.0004	15.2030	1.2233E-02	0.0005
5.4700	2.5416E-02	0.0005	11.5370	2.0752E-02	0.0004	15.3720	1.1764E-02	0.0005
5.9230	2.6058E-02	0.0005	11.7590	2.0328E-02	0.0004	15.5390	1.1301E-02	0.0005
6.3430	2.6320E-02	0.0005	11.9760	1.9898E-02	0.0004	15.7040	1.0829E-02	0.0005
6.7380	2.6383E-02	0.0004	12.1890	1.9463E-02	0.0004	15.8670	1.0356E-02	0.0005
7.1100	2.6322E-02	0.0004	12.3990	1.9005E-02	0.0004	16.0290	9.8644E-03	0.0005
7.4640	2.6173E-02	0.0004	12.6060	1.8585E-02	0.0004	16.1890	9.3840E-03	0.0006
7.8020	2.5969E-02	0.0004	12.8090	1.8132E-02	0.0004	16.3480	8.8995E-03	0.0006
8.1260	2.5714E-02	0.0004	13.0080	1.7680E-02	0.0004	16.5050	8.3901E-03	0.0006
8.4380	2.5424E-02	0.0004	13.2050	1.7235E-02	0.0004	16.6600	7.8822E-03	0.0006
8.7380	2.5122E-02	0.0004	13.3990	1.6800E-02	0.0004	16.8140	7.3684E-03	0.0006
9.0280	2.4788E-02	0.0004	13.5900	1.6350E-02	0.0004	16.9670	6.8435E-03	0.0006
9.3100	2.4425E-02	0.0004	13.7790	1.5896E-02	0.0004	17.1190	6.3021E-03	0.0007
9.5830	2.4049E-02	0.0004	13.9650	1.5444E-02	0.0005	17.2690	5.7492E-03	0.0007
9.8480	2.3660E-02	0.0004	14.1480	1.4995E-02	0.0005	17.4170	5.1801E-03	0.0007
10.1070	2.3280E-02	0.0004	14.3300	1.4538E-02	0.0005	17.5650	4.5895E-03	0.0007
10.3590	2.2854E-02	0.0004	14.5080	1.4079E-02	0.0005	17.7110	3.9639E-03	0.0008
10.6050	2.2445E-02	0.0004	14.6850	1.3622E-02	0.0005	17.8560	3.3035E-03	0.0008
10.8460	2.2030E-02	0.0004	14.8600	1.3166E-02	0.0005	18.0000	2.5614E-03	0.0008
3.8 (minimum boundary)				z=123.926			to z=124.425	
4.4270	2.1211E-02	0.0005	11.0810	2.1627E-02	0.0004	15.0320	1.2699E-02	0.0005
4.9760	2.4143E-02	0.0005	11.3110	2.1174E-02	0.0004	15.2030	1.2236E-02	0.0005
5.4700	2.5421E-02	0.0005	11.5370	2.0760E-02	0.0004	15.3720	1.1776E-02	0.0005
5.9230	2.6037E-02	0.0005	11.7590	2.0326E-02	0.0004	15.5390	1.1300E-02	0.0005
6.3430	2.6301E-02	0.0005	11.9760	1.9894E-02	0.0004	15.7040	1.0825E-02	0.0005
6.7380	2.6384E-02	0.0004	12.1890	1.9458E-02	0.0004	15.8670	1.0350E-02	0.0005
7.1100	2.6318E-02	0.0004	12.3990	1.9020E-02	0.0004	16.0290	9.8740E-03	0.0006
7.4640	2.6184E-02	0.0004	12.6060	1.8573E-02	0.0004	16.1890	9.3885E-03	0.0006
7.8020	2.5971E-02	0.0004	12.8090	1.8125E-02	0.0004	16.3480	8.8952E-03	0.0006
8.1260	2.5708E-02	0.0004	13.0080	1.7683E-02	0.0004	16.5050	8.3973E-03	0.0006
8.4380	2.5424E-02	0.0004	13.2050	1.7229E-02	0.0004	16.6600	7.8814E-03	0.0006
8.7380	2.5133E-02	0.0004	13.3990	1.6789E-02	0.0004	16.8140	7.3721E-03	0.0006
9.0280	2.4791E-02	0.0004	13.5900	1.6344E-02	0.0004	16.9670	6.8469E-03	0.0006
9.3100	2.4417E-02	0.0004	13.7790	1.5906E-02	0.0005	17.1190	6.3047E-03	0.0007
9.5830	2.4046E-02	0.0004	13.9650	1.5446E-02	0.0005	17.2690	5.7489E-03	0.0007
9.8480	2.3652E-02	0.0004	14.1480	1.4992E-02	0.0005	17.4170	5.1823E-03	0.0007
10.1070	2.3265E-02	0.0004	14.3300	1.4545E-02	0.0005	17.5650	4.5918E-03	0.0008
10.3590	2.2857E-02	0.0004	14.5080	1.4085E-02	0.0005	17.7110	3.9674E-03	0.0008
10.6050	2.2453E-02	0.0004	14.6850	1.3619E-02	0.0005	17.8560	3.3041E-03	0.0008
10.8460	2.2033E-02	0.0004	14.8600	1.3159E-02	0.0005	18.0000	2.5584E-03	0.0008
3.8 (minimum boundary)				z=124.425			to z=124.923	
4.4270	2.1201E-02	0.0005	11.0810	2.1616E-02	0.0004	15.0320	1.2703E-02	0.0005
4.9760	2.4158E-02	0.0005	11.3110	2.1174E-02	0.0004	15.2030	1.2234E-02	0.0005
5.4700	2.5411E-02	0.0005	11.5370	2.0752E-02	0.0004	15.3720	1.1765E-02	0.0005
5.9230	2.6026E-02	0.0005	11.7590	2.0318E-02	0.0004	15.5390	1.1302E-02	0.0005
6.3430	2.6289E-02	0.0005	11.9760	1.9891E-02	0.0004	15.7040	1.0841E-02	0.0005
6.7380	2.6365E-02	0.0004	12.1890	1.9446E-02	0.0004	15.8670	1.0355E-02	0.0005
7.1100	2.6332E-02	0.0004	12.3990	1.9020E-02	0.0004	16.0290	9.8781E-03	0.0006

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
7.4640	2.6181E-02	0.0004	12.6060	1.8581E-02	0.0004	16.1890	9.3846E-03	0.0006
7.8020	2.5970E-02	0.0004	12.8090	1.8137E-02	0.0004	16.3480	8.8924E-03	0.0006
8.1260	2.5709E-02	0.0004	13.0080	1.7688E-02	0.0004	16.5050	8.3960E-03	0.0006
8.4380	2.5426E-02	0.0004	13.2050	1.7244E-02	0.0004	16.6600	7.8898E-03	0.0006
8.7380	2.5115E-02	0.0004	13.3990	1.6799E-02	0.0004	16.8140	7.3725E-03	0.0006
9.0280	2.4793E-02	0.0004	13.5900	1.6354E-02	0.0004	16.9670	6.8487E-03	0.0006
9.3100	2.4413E-02	0.0004	13.7790	1.5899E-02	0.0005	17.1190	6.3116E-03	0.0007
9.5830	2.4053E-02	0.0004	13.9650	1.5453E-02	0.0005	17.2690	5.7572E-03	0.0007
9.8480	2.3664E-02	0.0004	14.1480	1.4993E-02	0.0005	17.4170	5.1892E-03	0.0007
10.1070	2.3260E-02	0.0004	14.3300	1.4530E-02	0.0005	17.5650	4.5915E-03	0.0008
10.3590	2.2853E-02	0.0004	14.5080	1.4080E-02	0.0005	17.7110	3.9650E-03	0.0008
10.6050	2.2453E-02	0.0004	14.6850	1.3622E-02	0.0005	17.8560	3.2999E-03	0.0008
10.8460	2.2036E-02	0.0004	14.8600	1.3163E-02	0.0005	18.0000	2.5555E-03	0.0008
3.8 (minimum boundary)			z=124.923			to z=125.422		
4.4270	2.1207E-02	0.0005	11.0810	2.1608E-02	0.0004	15.0320	1.2701E-02	0.0005
4.9760	2.4163E-02	0.0005	11.3110	2.1192E-02	0.0004	15.2030	1.2244E-02	0.0005
5.4700	2.5409E-02	0.0005	11.5370	2.0763E-02	0.0004	15.3720	1.1774E-02	0.0005
5.9230	2.6015E-02	0.0005	11.7590	2.0335E-02	0.0004	15.5390	1.1305E-02	0.0005
6.3430	2.6286E-02	0.0005	11.9760	1.9898E-02	0.0004	15.7040	1.0834E-02	0.0005
6.7380	2.6364E-02	0.0004	12.1890	1.9451E-02	0.0004	15.8670	1.0354E-02	0.0005
7.1100	2.6327E-02	0.0004	12.3990	1.9015E-02	0.0004	16.0290	9.8731E-03	0.0006
7.4640	2.6185E-02	0.0004	12.6060	1.8576E-02	0.0004	16.1890	9.3857E-03	0.0006
7.8020	2.5959E-02	0.0004	12.8090	1.8148E-02	0.0004	16.3480	8.8941E-03	0.0006
8.1260	2.5714E-02	0.0004	13.0080	1.7698E-02	0.0004	16.5050	8.3966E-03	0.0006
8.4380	2.5417E-02	0.0004	13.2050	1.7248E-02	0.0004	16.6600	7.8884E-03	0.0006
8.7380	2.5109E-02	0.0004	13.3990	1.6803E-02	0.0004	16.8140	7.3723E-03	0.0006
9.0280	2.4774E-02	0.0004	13.5900	1.6355E-02	0.0005	16.9670	6.8537E-03	0.0006
9.3100	2.4416E-02	0.0004	13.7790	1.5899E-02	0.0005	17.1190	6.3093E-03	0.0007
9.5830	2.4029E-02	0.0004	13.9650	1.5444E-02	0.0005	17.2690	5.7517E-03	0.0007
9.8480	2.3654E-02	0.0004	14.1480	1.5001E-02	0.0005	17.4170	5.1830E-03	0.0007
10.1070	2.3263E-02	0.0004	14.3300	1.4546E-02	0.0005	17.5650	4.5894E-03	0.0008
10.3590	2.2856E-02	0.0004	14.5080	1.4083E-02	0.0005	17.7110	3.9662E-03	0.0008
10.6050	2.2439E-02	0.0004	14.6850	1.3623E-02	0.0005	17.8560	3.3018E-03	0.0008
10.8460	2.2032E-02	0.0004	14.8600	1.3159E-02	0.0005	18.0000	2.5593E-03	0.0008
3.8 (minimum boundary)			z=125.422			to z=125.920		
4.4270	2.1202E-02	0.0005	11.0810	2.1611E-02	0.0004	15.0320	1.2698E-02	0.0005
4.9760	2.4147E-02	0.0005	11.3110	2.1188E-02	0.0004	15.2030	1.2234E-02	0.0005
5.4700	2.5403E-02	0.0005	11.5370	2.0763E-02	0.0004	15.3720	1.1772E-02	0.0005
5.9230	2.6020E-02	0.0005	11.7590	2.0339E-02	0.0004	15.5390	1.1308E-02	0.0005
6.3430	2.6298E-02	0.0005	11.9760	1.9904E-02	0.0004	15.7040	1.0835E-02	0.0005
6.7380	2.6362E-02	0.0005	12.1890	1.9458E-02	0.0004	15.8670	1.0365E-02	0.0005
7.1100	2.6311E-02	0.0004	12.3990	1.9020E-02	0.0004	16.0290	9.8739E-03	0.0006
7.4640	2.6181E-02	0.0004	12.6060	1.8588E-02	0.0004	16.1890	9.3885E-03	0.0006
7.8020	2.5963E-02	0.0004	12.8090	1.8150E-02	0.0004	16.3480	8.8984E-03	0.0006
8.1260	2.5697E-02	0.0004	13.0080	1.7707E-02	0.0004	16.5050	8.4010E-03	0.0006
8.4380	2.5415E-02	0.0004	13.2050	1.7252E-02	0.0004	16.6600	7.8895E-03	0.0006
8.7380	2.5112E-02	0.0004	13.3990	1.6804E-02	0.0004	16.8140	7.3648E-03	0.0006
9.0280	2.4790E-02	0.0004	13.5900	1.6351E-02	0.0005	16.9670	6.8421E-03	0.0006
9.3100	2.4422E-02	0.0004	13.7790	1.5898E-02	0.0005	17.1190	6.2991E-03	0.0007
9.5830	2.4038E-02	0.0004	13.9650	1.5436E-02	0.0005	17.2690	5.7516E-03	0.0007
9.8480	2.3670E-02	0.0004	14.1480	1.4999E-02	0.0005	17.4170	5.1782E-03	0.0007
10.1070	2.3265E-02	0.0004	14.3300	1.4530E-02	0.0005	17.5650	4.5873E-03	0.0008

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
10.3590	2.2861E-02	0.0004	14.5080	1.4077E-02	0.0005	17.7110	3.9673E-03	0.0008
10.6050	2.2443E-02	0.0004	14.6850	1.3619E-02	0.0005	17.8560	3.3025E-03	0.0008
10.8460	2.2033E-02	0.0004	14.8600	1.3154E-02	0.0005	18.0000	2.5596E-03	0.0009
3.8 (minimum boundary)			z=125.920			to z=126.419		
4.4270	2.1217E-02	0.0005	11.0810	2.1624E-02	0.0004	15.0320	1.2696E-02	0.0005
4.9760	2.4152E-02	0.0005	11.3110	2.1195E-02	0.0004	15.2030	1.2231E-02	0.0005
5.4700	2.5422E-02	0.0005	11.5370	2.0776E-02	0.0004	15.3720	1.1769E-02	0.0005
5.9230	2.6013E-02	0.0005	11.7590	2.0328E-02	0.0004	15.5390	1.1309E-02	0.0005
6.3430	2.6306E-02	0.0005	11.9760	1.9893E-02	0.0004	15.7040	1.0837E-02	0.0005
6.7380	2.6372E-02	0.0005	12.1890	1.9458E-02	0.0004	15.8670	1.0361E-02	0.0006
7.1100	2.6320E-02	0.0004	12.3990	1.9024E-02	0.0004	16.0290	9.8690E-03	0.0006
7.4640	2.6177E-02	0.0004	12.6060	1.8584E-02	0.0004	16.1890	9.3893E-03	0.0006
7.8020	2.5969E-02	0.0004	12.8090	1.8125E-02	0.0004	16.3480	8.8994E-03	0.0006
8.1260	2.5726E-02	0.0004	13.0080	1.7692E-02	0.0004	16.5050	8.3952E-03	0.0006
8.4380	2.5438E-02	0.0004	13.2050	1.7242E-02	0.0004	16.6600	7.8895E-03	0.0006
8.7380	2.5112E-02	0.0004	13.3990	1.6801E-02	0.0005	16.8140	7.3698E-03	0.0006
9.0280	2.4768E-02	0.0004	13.5900	1.6347E-02	0.0005	16.9670	6.8385E-03	0.0006
9.3100	2.4415E-02	0.0004	13.7790	1.5894E-02	0.0005	17.1190	6.3022E-03	0.0007
9.5830	2.4041E-02	0.0004	13.9650	1.5453E-02	0.0005	17.2690	5.7508E-03	0.0007
9.8480	2.3658E-02	0.0004	14.1480	1.4985E-02	0.0005	17.4170	5.1915E-03	0.0007
10.1070	2.3256E-02	0.0004	14.3300	1.4521E-02	0.0005	17.5650	4.5922E-03	0.0008
10.3590	2.2854E-02	0.0004	14.5080	1.4066E-02	0.0005	17.7110	3.9713E-03	0.0008
10.6050	2.2440E-02	0.0004	14.6850	1.3614E-02	0.0005	17.8560	3.3050E-03	0.0008
10.8460	2.2032E-02	0.0004	14.8600	1.3164E-02	0.0005	18.0000	2.5584E-03	0.0009
3.8 (minimum boundary)			z=126.419			to z=126.917		
4.4270	2.1226E-02	0.0005	11.0810	2.1616E-02	0.0004	15.0320	1.2703E-02	0.0005
4.9760	2.4176E-02	0.0005	11.3110	2.1196E-02	0.0004	15.2030	1.2239E-02	0.0005
5.4700	2.5427E-02	0.0005	11.5370	2.0756E-02	0.0004	15.3720	1.1775E-02	0.0005
5.9230	2.6026E-02	0.0005	11.7590	2.0321E-02	0.0004	15.5390	1.1307E-02	0.0005
6.3430	2.6299E-02	0.0005	11.9760	1.9890E-02	0.0004	15.7040	1.0839E-02	0.0005
6.7380	2.6385E-02	0.0005	12.1890	1.9449E-02	0.0004	15.8670	1.0361E-02	0.0006
7.1100	2.6318E-02	0.0004	12.3990	1.9007E-02	0.0004	16.0290	9.8775E-03	0.0006
7.4640	2.6179E-02	0.0004	12.6060	1.8569E-02	0.0004	16.1890	9.3880E-03	0.0006
7.8020	2.5963E-02	0.0004	12.8090	1.8123E-02	0.0004	16.3480	8.8927E-03	0.0006
8.1260	2.5710E-02	0.0004	13.0080	1.7686E-02	0.0004	16.5050	8.3910E-03	0.0006
8.4380	2.5426E-02	0.0004	13.2050	1.7240E-02	0.0005	16.6600	7.8853E-03	0.0006
8.7380	2.5101E-02	0.0004	13.3990	1.6784E-02	0.0005	16.8140	7.3664E-03	0.0006
9.0280	2.4771E-02	0.0004	13.5900	1.6341E-02	0.0005	16.9670	6.8418E-03	0.0007
9.3100	2.4420E-02	0.0004	13.7790	1.5896E-02	0.0005	17.1190	6.3105E-03	0.0007
9.5830	2.4063E-02	0.0004	13.9650	1.5448E-02	0.0005	17.2690	5.7519E-03	0.0007
9.8480	2.3667E-02	0.0004	14.1480	1.4985E-02	0.0005	17.4170	5.1819E-03	0.0007
10.1070	2.3271E-02	0.0004	14.3300	1.4523E-02	0.0005	17.5650	4.5915E-03	0.0008
10.3590	2.2870E-02	0.0004	14.5080	1.4072E-02	0.0005	17.7110	3.9631E-03	0.0008
10.6050	2.2454E-02	0.0004	14.6850	1.3613E-02	0.0005	17.8560	3.3020E-03	0.0008
10.8460	2.2038E-02	0.0004	14.8600	1.3168E-02	0.0005	18.0000	2.5589E-03	0.0009
3.8 (minimum boundary)			z=126.917			to z=127.416		
4.4270	2.1236E-02	0.0005	11.0810	2.1602E-02	0.0004	15.0320	1.2704E-02	0.0005
4.9760	2.4187E-02	0.0005	11.3110	2.1161E-02	0.0004	15.2030	1.2244E-02	0.0005
5.4700	2.5436E-02	0.0005	11.5370	2.0742E-02	0.0004	15.3720	1.1767E-02	0.0005
5.9230	2.6049E-02	0.0005	11.7590	2.0313E-02	0.0004	15.5390	1.1297E-02	0.0005
6.3430	2.6317E-02	0.0005	11.9760	1.9884E-02	0.0004	15.7040	1.0832E-02	0.0006
6.7380	2.6395E-02	0.0005	12.1890	1.9438E-02	0.0004	15.8670	1.0349E-02	0.0006

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
7.1100	2.6341E-02	0.0005	12.3990	1.8988E-02	0.0004	16.0290	9.8750E-03	0.0006
7.4640	2.6159E-02	0.0004	12.6060	1.8561E-02	0.0004	16.1890	9.3923E-03	0.0006
7.8020	2.5956E-02	0.0004	12.8090	1.8110E-02	0.0004	16.3480	8.9024E-03	0.0006
8.1260	2.5719E-02	0.0004	13.0080	1.7678E-02	0.0005	16.5050	8.3971E-03	0.0006
8.4380	2.5428E-02	0.0004	13.2050	1.7233E-02	0.0005	16.6600	7.8860E-03	0.0006
8.7380	2.5110E-02	0.0004	13.3990	1.6786E-02	0.0005	16.8140	7.3653E-03	0.0006
9.0280	2.4758E-02	0.0004	13.5900	1.6344E-02	0.0005	16.9670	6.8440E-03	0.0007
9.3100	2.4432E-02	0.0004	13.7790	1.5896E-02	0.0005	17.1190	6.3011E-03	0.0007
9.5830	2.4064E-02	0.0004	13.9650	1.5454E-02	0.0005	17.2690	5.7500E-03	0.0007
9.8480	2.3675E-02	0.0004	14.1480	1.4989E-02	0.0005	17.4170	5.1776E-03	0.0007
10.1070	2.3275E-02	0.0004	14.3300	1.4532E-02	0.0005	17.5650	4.5858E-03	0.0008
10.3590	2.2875E-02	0.0004	14.5080	1.4075E-02	0.0005	17.7110	3.9633E-03	0.0008
10.6050	2.2472E-02	0.0004	14.6850	1.3619E-02	0.0005	17.8560	3.2995E-03	0.0009
10.8460	2.2050E-02	0.0004	14.8600	1.3168E-02	0.0005	18.0000	2.5572E-03	0.0009
3.8 (minimum boundary)			z=127.416			to z=127.914		
4.4270	2.1239E-02	0.0005	11.0810	2.1608E-02	0.0004	15.0320	1.2702E-02	0.0005
4.9760	2.4195E-02	0.0005	11.3110	2.1198E-02	0.0004	15.2030	1.2233E-02	0.0005
5.4700	2.5454E-02	0.0005	11.5370	2.0751E-02	0.0004	15.3720	1.1768E-02	0.0005
5.9230	2.6074E-02	0.0005	11.7590	2.0317E-02	0.0004	15.5390	1.1300E-02	0.0005
6.3430	2.6336E-02	0.0005	11.9760	1.9879E-02	0.0004	15.7040	1.0826E-02	0.0006
6.7380	2.6406E-02	0.0005	12.1890	1.9448E-02	0.0004	15.8670	1.0348E-02	0.0006
7.1100	2.6332E-02	0.0005	12.3990	1.9013E-02	0.0004	16.0290	9.8788E-03	0.0006
7.4640	2.6172E-02	0.0005	12.6060	1.8564E-02	0.0004	16.1890	9.3862E-03	0.0006
7.8020	2.5964E-02	0.0004	12.8090	1.8127E-02	0.0005	16.3480	8.8949E-03	0.0006
8.1260	2.5696E-02	0.0004	13.0080	1.7679E-02	0.0005	16.5050	8.3962E-03	0.0006
8.4380	2.5415E-02	0.0004	13.2050	1.7235E-02	0.0005	16.6600	7.8859E-03	0.0006
8.7380	2.5106E-02	0.0004	13.3990	1.6793E-02	0.0005	16.8140	7.3659E-03	0.0006
9.0280	2.4753E-02	0.0004	13.5900	1.6336E-02	0.0005	16.9670	6.8395E-03	0.0007
9.3100	2.4413E-02	0.0004	13.7790	1.5875E-02	0.0005	17.1190	6.2993E-03	0.0007
9.5830	2.4055E-02	0.0004	13.9650	1.5432E-02	0.0005	17.2690	5.7414E-03	0.0007
9.8480	2.3668E-02	0.0004	14.1480	1.4975E-02	0.0005	17.4170	5.1752E-03	0.0008
10.1070	2.3276E-02	0.0004	14.3300	1.4529E-02	0.0005	17.5650	4.5802E-03	0.0008
10.3590	2.2877E-02	0.0004	14.5080	1.4068E-02	0.0005	17.7110	3.9612E-03	0.0008
10.6050	2.2467E-02	0.0004	14.6850	1.3618E-02	0.0005	17.8560	3.3023E-03	0.0009
10.8460	2.2047E-02	0.0004	14.8600	1.3163E-02	0.0005	18.0000	2.5608E-03	0.0009
3.8 (minimum boundary)			z=127.914			to z=128.412		
4.4270	2.1237E-02	0.0006	11.0810	2.1613E-02	0.0004	15.0320	1.2705E-02	0.0005
4.9760	2.4188E-02	0.0005	11.3110	2.1177E-02	0.0004	15.2030	1.2240E-02	0.0005
5.4700	2.5458E-02	0.0005	11.5370	2.0755E-02	0.0004	15.3720	1.1762E-02	0.0005
5.9230	2.6059E-02	0.0005	11.7590	2.0330E-02	0.0004	15.5390	1.1289E-02	0.0006
6.3430	2.6345E-02	0.0005	11.9760	1.9880E-02	0.0004	15.7040	1.0825E-02	0.0006
6.7380	2.6408E-02	0.0005	12.1890	1.9446E-02	0.0004	15.8670	1.0349E-02	0.0006
7.1100	2.6337E-02	0.0005	12.3990	1.9029E-02	0.0005	16.0290	9.8643E-03	0.0006
7.4640	2.6203E-02	0.0005	12.6060	1.8584E-02	0.0005	16.1890	9.3825E-03	0.0006
7.8020	2.5974E-02	0.0005	12.8090	1.8122E-02	0.0005	16.3480	8.8933E-03	0.0006
8.1260	2.5717E-02	0.0004	13.0080	1.7677E-02	0.0005	16.5050	8.4040E-03	0.0006
8.4380	2.5424E-02	0.0004	13.2050	1.7225E-02	0.0005	16.6600	7.8870E-03	0.0006
8.7380	2.5112E-02	0.0004	13.3990	1.6782E-02	0.0005	16.8140	7.3683E-03	0.0006
9.0280	2.4758E-02	0.0004	13.5900	1.6329E-02	0.0005	16.9670	6.8486E-03	0.0007
9.3100	2.4395E-02	0.0004	13.7790	1.5885E-02	0.0005	17.1190	6.3044E-03	0.0007
9.5830	2.4037E-02	0.0004	13.9650	1.5425E-02	0.0005	17.2690	5.7488E-03	0.0007
9.8480	2.3655E-02	0.0004	14.1480	1.4979E-02	0.0005	17.4170	5.1768E-03	0.0008

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
10.1070	2.3251E-02	0.0004	14.3300	1.4528E-02	0.0005	17.5650	4.5887E-03	0.0008
10.3590	2.2870E-02	0.0004	14.5080	1.4075E-02	0.0005	17.7110	3.9667E-03	0.0008
10.6050	2.2457E-02	0.0004	14.6850	1.3623E-02	0.0005	17.8560	3.2975E-03	0.0009
10.8460	2.2030E-02	0.0004	14.8600	1.3161E-02	0.0005	18.0000	2.5584E-03	0.0009
3.8 (minimum boundary)			z=128.412			to z=128.911		
4.4270	2.1262E-02	0.0006	11.0810	2.1608E-02	0.0004	15.0320	1.2702E-02	0.0005
4.9760	2.4216E-02	0.0005	11.3110	2.1172E-02	0.0004	15.2030	1.2235E-02	0.0005
5.4700	2.5459E-02	0.0005	11.5370	2.0743E-02	0.0004	15.3720	1.1768E-02	0.0005
5.9230	2.6075E-02	0.0005	11.7590	2.0322E-02	0.0004	15.5390	1.1307E-02	0.0006
6.3430	2.6346E-02	0.0005	11.9760	1.9890E-02	0.0005	15.7040	1.0825E-02	0.0006
6.7380	2.6421E-02	0.0005	12.1890	1.9440E-02	0.0005	15.8670	1.0344E-02	0.0006
7.1100	2.6357E-02	0.0005	12.3990	1.8994E-02	0.0005	16.0290	9.8649E-03	0.0006
7.4640	2.6197E-02	0.0005	12.6060	1.8559E-02	0.0005	16.1890	9.3850E-03	0.0006
7.8020	2.5975E-02	0.0005	12.8090	1.8122E-02	0.0005	16.3480	8.8874E-03	0.0006
8.1260	2.5731E-02	0.0005	13.0080	1.7673E-02	0.0005	16.5050	8.3920E-03	0.0006
8.4380	2.5428E-02	0.0004	13.2050	1.7214E-02	0.0005	16.6600	7.8882E-03	0.0006
8.7380	2.5106E-02	0.0004	13.3990	1.6775E-02	0.0005	16.8140	7.3765E-03	0.0007
9.0280	2.4757E-02	0.0004	13.5900	1.6321E-02	0.0005	16.9670	6.8496E-03	0.0007
9.3100	2.4417E-02	0.0004	13.7790	1.5870E-02	0.0005	17.1190	6.3084E-03	0.0007
9.5830	2.4032E-02	0.0004	13.9650	1.5424E-02	0.0005	17.2690	5.7547E-03	0.0007
9.8480	2.3636E-02	0.0004	14.1480	1.4984E-02	0.0005	17.4170	5.1843E-03	0.0008
10.1070	2.3253E-02	0.0004	14.3300	1.4537E-02	0.0005	17.5650	4.5906E-03	0.0008
10.3590	2.2859E-02	0.0004	14.5080	1.4070E-02	0.0005	17.7110	3.9655E-03	0.0008
10.6050	2.2463E-02	0.0004	14.6850	1.3606E-02	0.0005	17.8560	3.2996E-03	0.0009
10.8460	2.2041E-02	0.0004	14.8600	1.3158E-02	0.0005	18.0000	2.5584E-03	0.0009
3.8 (minimum boundary)			z=128.911			to z=129.409		
4.4270	2.1264E-02	0.0006	11.0810	2.1599E-02	0.0004	15.0320	1.2689E-02	0.0005
4.9760	2.4222E-02	0.0005	11.3110	2.1176E-02	0.0004	15.2030	1.2234E-02	0.0005
5.4700	2.5476E-02	0.0005	11.5370	2.0746E-02	0.0005	15.3720	1.1762E-02	0.0006
5.9230	2.6100E-02	0.0005	11.7590	2.0322E-02	0.0005	15.5390	1.1289E-02	0.0006
6.3430	2.6351E-02	0.0005	11.9760	1.9881E-02	0.0005	15.7040	1.0820E-02	0.0006
6.7380	2.6429E-02	0.0005	12.1890	1.9447E-02	0.0005	15.8670	1.0345E-02	0.0006
7.1100	2.6371E-02	0.0005	12.3990	1.9003E-02	0.0005	16.0290	9.8599E-03	0.0006
7.4640	2.6199E-02	0.0005	12.6060	1.8556E-02	0.0005	16.1890	9.3842E-03	0.0006
7.8020	2.5984E-02	0.0005	12.8090	1.8121E-02	0.0005	16.3480	8.8952E-03	0.0006
8.1260	2.5724E-02	0.0005	13.0080	1.7660E-02	0.0005	16.5050	8.3911E-03	0.0006
8.4380	2.5435E-02	0.0005	13.2050	1.7209E-02	0.0005	16.6600	7.8880E-03	0.0006
8.7380	2.5107E-02	0.0005	13.3990	1.6762E-02	0.0005	16.8140	7.3704E-03	0.0007
9.0280	2.4773E-02	0.0004	13.5900	1.6316E-02	0.0005	16.9670	6.8514E-03	0.0007
9.3100	2.4408E-02	0.0004	13.7790	1.5878E-02	0.0005	17.1190	6.3147E-03	0.0007
9.5830	2.4044E-02	0.0004	13.9650	1.5434E-02	0.0005	17.2690	5.7565E-03	0.0007
9.8480	2.3657E-02	0.0004	14.1480	1.4984E-02	0.0005	17.4170	5.1778E-03	0.0008
10.1070	2.3266E-02	0.0004	14.3300	1.4533E-02	0.0005	17.5650	4.5861E-03	0.0008
10.3590	2.2843E-02	0.0004	14.5080	1.4071E-02	0.0005	17.7110	3.9652E-03	0.0008
10.6050	2.2419E-02	0.0004	14.6850	1.3607E-02	0.0005	17.8560	3.3024E-03	0.0009
10.8460	2.2033E-02	0.0004	14.8600	1.3147E-02	0.0005	18.0000	2.5620E-03	0.0009
3.8 (minimum boundary)			z=129.409			to z=129.908		
4.4270	2.1292E-02	0.0006	11.0810	2.1599E-02	0.0005	15.0320	1.2687E-02	0.0005
4.9760	2.4233E-02	0.0006	11.3110	2.1169E-02	0.0005	15.2030	1.2227E-02	0.0006
5.4700	2.5489E-02	0.0005	11.5370	2.0738E-02	0.0005	15.3720	1.1767E-02	0.0006
5.9230	2.6088E-02	0.0005	11.7590	2.0311E-02	0.0005	15.5390	1.1293E-02	0.0006
6.3430	2.6348E-02	0.0005	11.9760	1.9889E-02	0.0005	15.7040	1.0825E-02	0.0006

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
6.7380	2.6417E-02	0.0005	12.1890	1.9449E-02	0.0005	15.8670	1.0341E-02	0.0006
7.1100	2.6369E-02	0.0005	12.3990	1.8999E-02	0.0005	16.0290	9.8606E-03	0.0006
7.4640	2.6229E-02	0.0005	12.6060	1.8556E-02	0.0005	16.1890	9.3812E-03	0.0006
7.8020	2.6008E-02	0.0005	12.8090	1.8111E-02	0.0005	16.3480	8.8800E-03	0.0006
8.1260	2.5734E-02	0.0005	13.0080	1.7665E-02	0.0005	16.5050	8.3876E-03	0.0006
8.4380	2.5435E-02	0.0005	13.2050	1.7212E-02	0.0005	16.6600	7.8866E-03	0.0006
8.7380	2.5123E-02	0.0005	13.3990	1.6780E-02	0.0005	16.8140	7.3756E-03	0.0007
9.0280	2.4776E-02	0.0005	13.5900	1.6320E-02	0.0005	16.9670	6.8470E-03	0.0007
9.3100	2.4412E-02	0.0005	13.7790	1.5856E-02	0.0005	17.1190	6.3039E-03	0.0007
9.5830	2.4051E-02	0.0005	13.9650	1.5421E-02	0.0005	17.2690	5.7501E-03	0.0008
9.8480	2.3673E-02	0.0005	14.1480	1.4978E-02	0.0005	17.4170	5.1781E-03	0.0008
10.1070	2.3267E-02	0.0005	14.3300	1.4516E-02	0.0005	17.5650	4.5849E-03	0.0008
10.3590	2.2845E-02	0.0005	14.5080	1.4052E-02	0.0005	17.7110	3.9634E-03	0.0008
10.6050	2.2422E-02	0.0005	14.6850	1.3601E-02	0.0005	17.8560	3.3027E-03	0.0009
10.8460	2.2013E-02	0.0005	14.8600	1.3148E-02	0.0005	18.0000	2.5599E-03	0.0009
3.8 (minimum boundary)								
z=129.908								
to z=130.406								
4.4270	2.1303E-02	0.0006	11.0810	2.1597E-02	0.0005	15.0320	1.2681E-02	0.0005
4.9760	2.4238E-02	0.0006	11.3110	2.1164E-02	0.0005	15.2030	1.2219E-02	0.0006
5.4700	2.5504E-02	0.0005	11.5370	2.0744E-02	0.0005	15.3720	1.1749E-02	0.0006
5.9230	2.6098E-02	0.0005	11.7590	2.0292E-02	0.0005	15.5390	1.1282E-02	0.0006
6.3430	2.6377E-02	0.0005	11.9760	1.9861E-02	0.0005	15.7040	1.0809E-02	0.0006
6.7380	2.6434E-02	0.0005	12.1890	1.9427E-02	0.0005	15.8670	1.0344E-02	0.0006
7.1100	2.6391E-02	0.0005	12.3990	1.8997E-02	0.0005	16.0290	9.8648E-03	0.0006
7.4640	2.6216E-02	0.0005	12.6060	1.8561E-02	0.0005	16.1890	9.3779E-03	0.0006
7.8020	2.6011E-02	0.0005	12.8090	1.8113E-02	0.0005	16.3480	8.8853E-03	0.0006
8.1260	2.5749E-02	0.0005	13.0080	1.7670E-02	0.0005	16.5050	8.3824E-03	0.0006
8.4380	2.5452E-02	0.0005	13.2050	1.7219E-02	0.0005	16.6600	7.8766E-03	0.0007
8.7380	2.5128E-02	0.0005	13.3990	1.6767E-02	0.0005	16.8140	7.3607E-03	0.0007
9.0280	2.4785E-02	0.0005	13.5900	1.6330E-02	0.0005	16.9670	6.8335E-03	0.0007
9.3100	2.4421E-02	0.0005	13.7790	1.5868E-02	0.0005	17.1190	6.2936E-03	0.0007
9.5830	2.4040E-02	0.0005	13.9650	1.5408E-02	0.0005	17.2690	5.7448E-03	0.0008
9.8480	2.3665E-02	0.0005	14.1480	1.4976E-02	0.0005	17.4170	5.1753E-03	0.0008
10.1070	2.3261E-02	0.0005	14.3300	1.4525E-02	0.0005	17.5650	4.5819E-03	0.0008
10.3590	2.2854E-02	0.0005	14.5080	1.4066E-02	0.0005	17.7110	3.9585E-03	0.0009
10.6050	2.2438E-02	0.0005	14.6850	1.3607E-02	0.0005	17.8560	3.2967E-03	0.0009
10.8460	2.2024E-02	0.0005	14.8600	1.3150E-02	0.0005	18.0000	2.5562E-03	0.0009
3.8 (minimum boundary)								
z=130.406								
to z=130.905								
4.4270	2.1326E-02	0.0006	11.0810	2.1595E-02	0.0005	15.0320	1.2676E-02	0.0006
4.9760	2.4261E-02	0.0006	11.3110	2.1170E-02	0.0005	15.2030	1.2225E-02	0.0006
5.4700	2.5503E-02	0.0005	11.5370	2.0739E-02	0.0005	15.3720	1.1758E-02	0.0006
5.9230	2.6110E-02	0.0005	11.7590	2.0296E-02	0.0005	15.5390	1.1284E-02	0.0006
6.3430	2.6380E-02	0.0005	11.9760	1.9875E-02	0.0005	15.7040	1.0818E-02	0.0006
6.7380	2.6454E-02	0.0005	12.1890	1.9431E-02	0.0005	15.8670	1.0334E-02	0.0006
7.1100	2.6386E-02	0.0005	12.3990	1.8983E-02	0.0005	16.0290	9.8644E-03	0.0006
7.4640	2.6229E-02	0.0005	12.6060	1.8546E-02	0.0005	16.1890	9.3780E-03	0.0006
7.8020	2.6019E-02	0.0005	12.8090	1.8107E-02	0.0005	16.3480	8.8818E-03	0.0006
8.1260	2.5755E-02	0.0005	13.0080	1.7672E-02	0.0005	16.5050	8.3823E-03	0.0006
8.4380	2.5454E-02	0.0005	13.2050	1.7218E-02	0.0005	16.6600	7.8732E-03	0.0007
8.7380	2.5131E-02	0.0005	13.3990	1.6770E-02	0.0005	16.8140	7.3549E-03	0.0007
9.0280	2.4783E-02	0.0005	13.5900	1.6324E-02	0.0005	16.9670	6.8295E-03	0.0007
9.3100	2.4403E-02	0.0005	13.7790	1.5876E-02	0.0005	17.1190	6.3001E-03	0.0007
9.5830	2.4044E-02	0.0005	13.9650	1.5418E-02	0.0005	17.2690	5.7455E-03	0.0008

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
9.8480	2.3648E-02	0.0005	14.1480	1.4962E-02	0.0005	17.4170	5.1760E-03	0.0008
10.1070	2.3250E-02	0.0005	14.3300	1.4513E-02	0.0005	17.5650	4.5822E-03	0.0008
10.3590	2.2839E-02	0.0005	14.5080	1.4057E-02	0.0005	17.7110	3.9613E-03	0.0009
10.6050	2.2436E-02	0.0005	14.6850	1.3601E-02	0.0005	17.8560	3.2942E-03	0.0009
10.8460	2.2012E-02	0.0005	14.8600	1.3147E-02	0.0005	18.0000	2.5559E-03	0.0009
3.8 (minimum boundary)			z=130.905			to z=131.403		
4.4270	2.1347E-02	0.0006	11.0810	2.1604E-02	0.0005	15.0320	1.2676E-02	0.0006
4.9760	2.4300E-02	0.0006	11.3110	2.1161E-02	0.0005	15.2030	1.2214E-02	0.0006
5.4700	2.5534E-02	0.0006	11.5370	2.0751E-02	0.0005	15.3720	1.1750E-02	0.0006
5.9230	2.6142E-02	0.0005	11.7590	2.0309E-02	0.0005	15.5390	1.1285E-02	0.0006
6.3430	2.6405E-02	0.0005	11.9760	1.9856E-02	0.0005	15.7040	1.0810E-02	0.0006
6.7380	2.6440E-02	0.0005	12.1890	1.9435E-02	0.0005	15.8670	1.0333E-02	0.0006
7.1100	2.6376E-02	0.0005	12.3990	1.8995E-02	0.0005	16.0290	9.8486E-03	0.0006
7.4640	2.6238E-02	0.0005	12.6060	1.8552E-02	0.0005	16.1890	9.3683E-03	0.0006
7.8020	2.6006E-02	0.0005	12.8090	1.8106E-02	0.0005	16.3480	8.8719E-03	0.0006
8.1260	2.5751E-02	0.0005	13.0080	1.7658E-02	0.0005	16.5050	8.3795E-03	0.0007
8.4380	2.5467E-02	0.0005	13.2050	1.7207E-02	0.0005	16.6600	7.8791E-03	0.0007
8.7380	2.5129E-02	0.0005	13.3990	1.6768E-02	0.0005	16.8140	7.3577E-03	0.0007
9.0280	2.4773E-02	0.0005	13.5900	1.6314E-02	0.0005	16.9670	6.8335E-03	0.0007
9.3100	2.4395E-02	0.0005	13.7790	1.5852E-02	0.0005	17.1190	6.2952E-03	0.0008
9.5830	2.4033E-02	0.0005	13.9650	1.5407E-02	0.0005	17.2690	5.7423E-03	0.0008
9.8480	2.3646E-02	0.0005	14.1480	1.4961E-02	0.0005	17.4170	5.1734E-03	0.0008
10.1070	2.3239E-02	0.0005	14.3300	1.4499E-02	0.0005	17.5650	4.5812E-03	0.0008
10.3590	2.2858E-02	0.0005	14.5080	1.4055E-02	0.0005	17.7110	3.9650E-03	0.0009
10.6050	2.2448E-02	0.0005	14.6850	1.3600E-02	0.0005	17.8560	3.3027E-03	0.0009
10.8460	2.2019E-02	0.0005	14.8600	1.3136E-02	0.0006	18.0000	2.5611E-03	0.0010
3.8 (minimum boundary)			z=131.403			to z=131.902		
4.4270	2.1366E-02	0.0006	11.0810	2.1579E-02	0.0005	15.0320	1.2680E-02	0.0006
4.9760	2.4309E-02	0.0006	11.3110	2.1152E-02	0.0005	15.2030	1.2218E-02	0.0006
5.4700	2.5552E-02	0.0006	11.5370	2.0730E-02	0.0005	15.3720	1.1743E-02	0.0006
5.9230	2.6150E-02	0.0005	11.7590	2.0317E-02	0.0005	15.5390	1.1278E-02	0.0006
6.3430	2.6405E-02	0.0005	11.9760	1.9878E-02	0.0005	15.7040	1.0813E-02	0.0006
6.7380	2.6464E-02	0.0005	12.1890	1.9442E-02	0.0005	15.8670	1.0341E-02	0.0006
7.1100	2.6384E-02	0.0005	12.3990	1.8996E-02	0.0005	16.0290	9.8517E-03	0.0006
7.4640	2.6239E-02	0.0005	12.6060	1.8554E-02	0.0005	16.1890	9.3553E-03	0.0006
7.8020	2.6018E-02	0.0005	12.8090	1.8106E-02	0.0005	16.3480	8.8591E-03	0.0007
8.1260	2.5759E-02	0.0005	13.0080	1.7646E-02	0.0005	16.5050	8.3742E-03	0.0007
8.4380	2.5451E-02	0.0005	13.2050	1.7206E-02	0.0005	16.6600	7.8685E-03	0.0007
8.7380	2.5139E-02	0.0005	13.3990	1.6756E-02	0.0005	16.8140	7.3563E-03	0.0007
9.0280	2.4778E-02	0.0005	13.5900	1.6306E-02	0.0005	16.9670	6.8375E-03	0.0007
9.3100	2.4407E-02	0.0005	13.7790	1.5858E-02	0.0005	17.1190	6.2975E-03	0.0008
9.5830	2.4039E-02	0.0005	13.9650	1.5402E-02	0.0005	17.2690	5.7424E-03	0.0008
9.8480	2.3641E-02	0.0005	14.1480	1.4961E-02	0.0005	17.4170	5.1747E-03	0.0008
10.1070	2.3241E-02	0.0005	14.3300	1.4503E-02	0.0005	17.5650	4.5820E-03	0.0009
10.3590	2.2842E-02	0.0005	14.5080	1.4050E-02	0.0006	17.7110	3.9602E-03	0.0009
10.6050	2.2443E-02	0.0005	14.6850	1.3601E-02	0.0006	17.8560	3.3009E-03	0.0009
10.8460	2.2013E-02	0.0005	14.8600	1.3134E-02	0.0006	18.0000	2.5598E-03	0.0010
3.8 (minimum boundary)			z=131.902			to z=132.400		
4.4270	2.1395E-02	0.0006	11.0810	2.1575E-02	0.0005	15.0320	1.2676E-02	0.0006
4.9760	2.4337E-02	0.0006	11.3110	2.1156E-02	0.0005	15.2030	1.2216E-02	0.0006
5.4700	2.5573E-02	0.0006	11.5370	2.0741E-02	0.0005	15.3720	1.1742E-02	0.0006
5.9230	2.6166E-02	0.0005	11.7590	2.0294E-02	0.0005	15.5390	1.1267E-02	0.0006

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
6.3430	2.6433E-02	0.0005	11.9760	1.9858E-02	0.0005	15.7040	1.0798E-02	0.0006
6.7380	2.6490E-02	0.0005	12.1890	1.9427E-02	0.0005	15.8670	1.0330E-02	0.0006
7.1100	2.6393E-02	0.0005	12.3990	1.8993E-02	0.0005	16.0290	9.8534E-03	0.0006
7.4640	2.6254E-02	0.0005	12.6060	1.8548E-02	0.0005	16.1890	9.3565E-03	0.0006
7.8020	2.6047E-02	0.0005	12.8090	1.8094E-02	0.0005	16.3480	8.8692E-03	0.0007
8.1260	2.5767E-02	0.0005	13.0080	1.7639E-02	0.0005	16.5050	8.3746E-03	0.0007
8.4380	2.5475E-02	0.0005	13.2050	1.7196E-02	0.0005	16.6600	7.8685E-03	0.0007
8.7380	2.5139E-02	0.0005	13.3990	1.6755E-02	0.0005	16.8140	7.3499E-03	0.0007
9.0280	2.4807E-02	0.0005	13.5900	1.6309E-02	0.0005	16.9670	6.8212E-03	0.0007
9.3100	2.4412E-02	0.0005	13.7790	1.5857E-02	0.0005	17.1190	6.2884E-03	0.0008
9.5830	2.4020E-02	0.0005	13.9650	1.5409E-02	0.0005	17.2690	5.7370E-03	0.0008
9.8480	2.3640E-02	0.0005	14.1480	1.4966E-02	0.0005	17.4170	5.1678E-03	0.0008
10.1070	2.3226E-02	0.0005	14.3300	1.4511E-02	0.0006	17.5650	4.5768E-03	0.0009
10.3590	2.2821E-02	0.0005	14.5080	1.4046E-02	0.0006	17.7110	3.9521E-03	0.0009
10.6050	2.2424E-02	0.0005	14.6850	1.3583E-02	0.0006	17.8560	3.2913E-03	0.0010
10.8460	2.2005E-02	0.0005	14.8600	1.3128E-02	0.0006	18.0000	2.5549E-03	0.0010
3.8 (minimum boundary)			z=132.400			to z=132.899		
4.4270	2.1420E-02	0.0006	11.0810	2.1576E-02	0.0005	15.0320	1.2675E-02	0.0006
4.9760	2.4348E-02	0.0006	11.3110	2.1144E-02	0.0005	15.2030	1.2210E-02	0.0006
5.4700	2.5570E-02	0.0006	11.5370	2.0720E-02	0.0005	15.3720	1.1742E-02	0.0006
5.9230	2.6185E-02	0.0006	11.7590	2.0295E-02	0.0005	15.5390	1.1274E-02	0.0006
6.3430	2.6451E-02	0.0005	11.9760	1.9862E-02	0.0005	15.7040	1.0805E-02	0.0006
6.7380	2.6516E-02	0.0005	12.1890	1.9418E-02	0.0005	15.8670	1.0319E-02	0.0006
7.1100	2.6429E-02	0.0005	12.3990	1.8978E-02	0.0005	16.0290	9.8426E-03	0.0006
7.4640	2.6277E-02	0.0005	12.6060	1.8553E-02	0.0005	16.1890	9.3667E-03	0.0007
7.8020	2.6044E-02	0.0005	12.8090	1.8098E-02	0.0005	16.3480	8.8701E-03	0.0007
8.1260	2.5757E-02	0.0005	13.0080	1.7632E-02	0.0005	16.5050	8.3719E-03	0.0007
8.4380	2.5458E-02	0.0005	13.2050	1.7180E-02	0.0005	16.6600	7.8651E-03	0.0007
8.7380	2.5167E-02	0.0005	13.3990	1.6745E-02	0.0005	16.8140	7.3508E-03	0.0007
9.0280	2.4803E-02	0.0005	13.5900	1.6300E-02	0.0005	16.9670	6.8299E-03	0.0008
9.3100	2.4417E-02	0.0005	13.7790	1.5861E-02	0.0005	17.1190	6.2869E-03	0.0008
9.5830	2.4018E-02	0.0005	13.9650	1.5403E-02	0.0005	17.2690	5.7380E-03	0.0008
9.8480	2.3627E-02	0.0005	14.1480	1.4951E-02	0.0006	17.4170	5.1629E-03	0.0008
10.1070	2.3233E-02	0.0005	14.3300	1.4503E-02	0.0006	17.5650	4.5716E-03	0.0009
10.3590	2.2812E-02	0.0005	14.5080	1.4039E-02	0.0006	17.7110	3.9541E-03	0.0009
10.6050	2.2417E-02	0.0005	14.6850	1.3586E-02	0.0006	17.8560	3.2920E-03	0.0010
10.8460	2.1988E-02	0.0005	14.8600	1.3131E-02	0.0006	18.0000	2.5582E-03	0.0010
3.8 (minimum boundary)			z=132.899			to z=133.397		
4.4270	2.1455E-02	0.0006	11.0810	2.1568E-02	0.0005	15.0320	1.2665E-02	0.0006
4.9760	2.4389E-02	0.0006	11.3110	2.1140E-02	0.0005	15.2030	1.2209E-02	0.0006
5.4700	2.5612E-02	0.0006	11.5370	2.0723E-02	0.0005	15.3720	1.1735E-02	0.0006
5.9230	2.6210E-02	0.0006	11.7590	2.0292E-02	0.0005	15.5390	1.1276E-02	0.0006
6.3430	2.6448E-02	0.0006	11.9760	1.9844E-02	0.0005	15.7040	1.0804E-02	0.0006
6.7380	2.6523E-02	0.0005	12.1890	1.9408E-02	0.0005	15.8670	1.0330E-02	0.0006
7.1100	2.6456E-02	0.0005	12.3990	1.8955E-02	0.0005	16.0290	9.8540E-03	0.0007
7.4640	2.6281E-02	0.0005	12.6060	1.8517E-02	0.0005	16.1890	9.3639E-03	0.0007
7.8020	2.6049E-02	0.0005	12.8090	1.8068E-02	0.0005	16.3480	8.8684E-03	0.0007
8.1260	2.5775E-02	0.0005	13.0080	1.7620E-02	0.0005	16.5050	8.3778E-03	0.0007
8.4380	2.5490E-02	0.0005	13.2050	1.7177E-02	0.0005	16.6600	7.8779E-03	0.0007
8.7380	2.5143E-02	0.0005	13.3990	1.6735E-02	0.0005	16.8140	7.3537E-03	0.0008
9.0280	2.4792E-02	0.0005	13.5900	1.6293E-02	0.0005	16.9670	6.8233E-03	0.0008
9.3100	2.4414E-02	0.0005	13.7790	1.5852E-02	0.0006	17.1190	6.2854E-03	0.0008

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
9.5830	2.4035E-02	0.0005	13.9650	1.5384E-02	0.0006	17.2690	5.7361E-03	0.0008
9.8480	2.3622E-02	0.0005	14.1480	1.4939E-02	0.0006	17.4170	5.1644E-03	0.0009
10.1070	2.3237E-02	0.0005	14.3300	1.4496E-02	0.0006	17.5650	4.5701E-03	0.0009
10.3590	2.2831E-02	0.0005	14.5080	1.4035E-02	0.0006	17.7110	3.9558E-03	0.0009
10.6050	2.2412E-02	0.0005	14.6850	1.3583E-02	0.0006	17.8560	3.2942E-03	0.0010
10.8460	2.1970E-02	0.0005	14.8600	1.3122E-02	0.0006	18.0000	2.5582E-03	0.0010
3.8 (minimum boundary)			z=133.397			to z=133.896		
4.4270	2.1511E-02	0.0006	11.0810	2.1578E-02	0.0005	15.0320	1.2651E-02	0.0006
4.9760	2.4421E-02	0.0006	11.3110	2.1137E-02	0.0005	15.2030	1.2189E-02	0.0006
5.4700	2.5631E-02	0.0006	11.5370	2.0709E-02	0.0005	15.3720	1.1728E-02	0.0006
5.9230	2.6216E-02	0.0006	11.7590	2.0276E-02	0.0005	15.5390	1.1269E-02	0.0006
6.3430	2.6481E-02	0.0006	11.9760	1.9841E-02	0.0005	15.7040	1.0795E-02	0.0006
6.7380	2.6530E-02	0.0006	12.1890	1.9397E-02	0.0005	15.8670	1.0328E-02	0.0007
7.1100	2.6427E-02	0.0005	12.3990	1.8943E-02	0.0005	16.0290	9.8460E-03	0.0007
7.4640	2.6284E-02	0.0005	12.6060	1.8497E-02	0.0005	16.1890	9.3622E-03	0.0007
7.8020	2.6046E-02	0.0005	12.8090	1.8062E-02	0.0005	16.3480	8.8743E-03	0.0007
8.1260	2.5785E-02	0.0005	13.0080	1.7605E-02	0.0005	16.5050	8.3761E-03	0.0007
8.4380	2.5491E-02	0.0005	13.2050	1.7170E-02	0.0006	16.6600	7.8657E-03	0.0007
8.7380	2.5162E-02	0.0005	13.3990	1.6716E-02	0.0006	16.8140	7.3422E-03	0.0008
9.0280	2.4778E-02	0.0005	13.5900	1.6281E-02	0.0006	16.9670	6.8143E-03	0.0008
9.3100	2.4433E-02	0.0005	13.7790	1.5846E-02	0.0006	17.1190	6.2835E-03	0.0008
9.5830	2.4048E-02	0.0005	13.9650	1.5397E-02	0.0006	17.2690	5.7365E-03	0.0008
9.8480	2.3652E-02	0.0005	14.1480	1.4947E-02	0.0006	17.4170	5.1596E-03	0.0009
10.1070	2.3245E-02	0.0005	14.3300	1.4481E-02	0.0006	17.5650	4.5699E-03	0.0009
10.3590	2.2841E-02	0.0005	14.5080	1.4032E-02	0.0006	17.7110	3.9575E-03	0.0010
10.6050	2.2418E-02	0.0005	14.6850	1.3580E-02	0.0006	17.8560	3.2985E-03	0.0010
10.8460	2.1985E-02	0.0005	14.8600	1.3115E-02	0.0006	18.0000	2.5578E-03	0.0010
3.8 (minimum boundary)			z=133.896			to z=134.394		
4.4270	2.1536E-02	0.0006	11.0810	2.1568E-02	0.0005	15.0320	1.2648E-02	0.0006
4.9760	2.4449E-02	0.0006	11.3110	2.1155E-02	0.0005	15.2030	1.2183E-02	0.0006
5.4700	2.5662E-02	0.0006	11.5370	2.0727E-02	0.0005	15.3720	1.1726E-02	0.0006
5.9230	2.6254E-02	0.0006	11.7590	2.0268E-02	0.0005	15.5390	1.1264E-02	0.0006
6.3430	2.6502E-02	0.0006	11.9760	1.9836E-02	0.0005	15.7040	1.0791E-02	0.0007
6.7380	2.6559E-02	0.0006	12.1890	1.9402E-02	0.0005	15.8670	1.0308E-02	0.0007
7.1100	2.6479E-02	0.0006	12.3990	1.8947E-02	0.0005	16.0290	9.8379E-03	0.0007
7.4640	2.6304E-02	0.0005	12.6060	1.8502E-02	0.0006	16.1890	9.3481E-03	0.0007
7.8020	2.6078E-02	0.0005	12.8090	1.8056E-02	0.0006	16.3480	8.8586E-03	0.0007
8.1260	2.5796E-02	0.0005	13.0080	1.7607E-02	0.0006	16.5050	8.3624E-03	0.0007
8.4380	2.5478E-02	0.0005	13.2050	1.7165E-02	0.0006	16.6600	7.8534E-03	0.0008
8.7380	2.5137E-02	0.0005	13.3990	1.6710E-02	0.0006	16.8140	7.3418E-03	0.0008
9.0280	2.4770E-02	0.0005	13.5900	1.6269E-02	0.0006	16.9670	6.8241E-03	0.0008
9.3100	2.4386E-02	0.0005	13.7790	1.5838E-02	0.0006	17.1190	6.2849E-03	0.0008
9.5830	2.4032E-02	0.0005	13.9650	1.5379E-02	0.0006	17.2690	5.7375E-03	0.0009
9.8480	2.3635E-02	0.0005	14.1480	1.4935E-02	0.0006	17.4170	5.1670E-03	0.0009
10.1070	2.3242E-02	0.0005	14.3300	1.4477E-02	0.0006	17.5650	4.5745E-03	0.0009
10.3590	2.2831E-02	0.0005	14.5080	1.4027E-02	0.0006	17.7110	3.9621E-03	0.0010
10.6050	2.2415E-02	0.0005	14.6850	1.3573E-02	0.0006	17.8560	3.3047E-03	0.0010
10.8460	2.1968E-02	0.0005	14.8600	1.3109E-02	0.0006	18.0000	2.5612E-03	0.0011
3.8 (minimum boundary)			z=134.394			to z=134.893		
4.4270	2.1586E-02	0.0007	11.0810	2.1556E-02	0.0005	15.0320	1.2639E-02	0.0006
4.9760	2.4522E-02	0.0006	11.3110	2.1128E-02	0.0005	15.2030	1.2177E-02	0.0006
5.4700	2.5732E-02	0.0006	11.5370	2.0709E-02	0.0005	15.3720	1.1724E-02	0.0006

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
5.9230	2.6307E-02	0.0006	11.7590	2.0264E-02	0.0006	15.5390	1.1260E-02	0.0007
6.3430	2.6546E-02	0.0006	11.9760	1.9822E-02	0.0006	15.7040	1.0782E-02	0.0007
6.7380	2.6574E-02	0.0006	12.1890	1.9383E-02	0.0006	15.8670	1.0298E-02	0.0007
7.1100	2.6476E-02	0.0006	12.3990	1.8934E-02	0.0006	16.0290	9.8251E-03	0.0007
7.4640	2.6283E-02	0.0006	12.6060	1.8491E-02	0.0006	16.1890	9.3339E-03	0.0007
7.8020	2.6083E-02	0.0006	12.8090	1.8055E-02	0.0006	16.3480	8.8552E-03	0.0007
8.1260	2.5783E-02	0.0006	13.0080	1.7603E-02	0.0006	16.5050	8.3709E-03	0.0008
8.4380	2.5473E-02	0.0005	13.2050	1.7160E-02	0.0006	16.6600	7.8627E-03	0.0008
8.7380	2.5141E-02	0.0005	13.3990	1.6705E-02	0.0006	16.8140	7.3483E-03	0.0008
9.0280	2.4781E-02	0.0005	13.5900	1.6269E-02	0.0006	16.9670	6.8229E-03	0.0008
9.3100	2.4390E-02	0.0005	13.7790	1.5819E-02	0.0006	17.1190	6.2866E-03	0.0008
9.5830	2.4019E-02	0.0005	13.9650	1.5373E-02	0.0006	17.2690	5.7301E-03	0.0009
9.8480	2.3619E-02	0.0005	14.1480	1.4930E-02	0.0006	17.4170	5.1611E-03	0.0009
10.1070	2.3232E-02	0.0005	14.3300	1.4474E-02	0.0006	17.5650	4.5717E-03	0.0010
10.3590	2.2822E-02	0.0005	14.5080	1.4027E-02	0.0006	17.7110	3.9555E-03	0.0010
10.6050	2.2409E-02	0.0005	14.6850	1.3569E-02	0.0006	17.8560	3.3002E-03	0.0011
10.8460	2.1982E-02	0.0005	14.8600	1.3104E-02	0.0006	18.0000	2.5594E-03	0.0011
	3.8 (minimum boundary)			z=134.893			to z=135.391	
4.4270	2.1651E-02	0.0007	11.0810	2.1537E-02	0.0006	15.0320	1.2625E-02	0.0006
4.9760	2.4573E-02	0.0006	11.3110	2.1104E-02	0.0006	15.2030	1.2170E-02	0.0007
5.4700	2.5784E-02	0.0006	11.5370	2.0682E-02	0.0006	15.3720	1.1702E-02	0.0007
5.9230	2.6350E-02	0.0006	11.7590	2.0248E-02	0.0006	15.5390	1.1244E-02	0.0007
6.3430	2.6568E-02	0.0006	11.9760	1.9812E-02	0.0006	15.7040	1.0769E-02	0.0007
6.7380	2.6586E-02	0.0006	12.1890	1.9376E-02	0.0006	15.8670	1.0298E-02	0.0007
7.1100	2.6486E-02	0.0006	12.3990	1.8938E-02	0.0006	16.0290	9.8254E-03	0.0007
7.4640	2.6311E-02	0.0006	12.6060	1.8483E-02	0.0006	16.1890	9.3479E-03	0.0007
7.8020	2.6089E-02	0.0006	12.8090	1.8029E-02	0.0006	16.3480	8.8576E-03	0.0008
8.1260	2.5808E-02	0.0006	13.0080	1.7577E-02	0.0006	16.5050	8.3585E-03	0.0008
8.4380	2.5491E-02	0.0006	13.2050	1.7154E-02	0.0006	16.6600	7.8512E-03	0.0008
8.7380	2.5133E-02	0.0006	13.3990	1.6710E-02	0.0006	16.8140	7.3440E-03	0.0008
9.0280	2.4778E-02	0.0006	13.5900	1.6249E-02	0.0006	16.9670	6.8164E-03	0.0008
9.3100	2.4401E-02	0.0006	13.7790	1.5809E-02	0.0006	17.1190	6.2898E-03	0.0009
9.5830	2.4008E-02	0.0006	13.9650	1.5362E-02	0.0006	17.2690	5.7384E-03	0.0009
9.8480	2.3631E-02	0.0006	14.1480	1.4917E-02	0.0006	17.4170	5.1646E-03	0.0009
10.1070	2.3230E-02	0.0006	14.3300	1.4465E-02	0.0006	17.5650	4.5767E-03	0.0010
10.3590	2.2832E-02	0.0006	14.5080	1.4012E-02	0.0006	17.7110	3.9618E-03	0.0010
10.6050	2.2402E-02	0.0006	14.6850	1.3561E-02	0.0006	17.8560	3.3003E-03	0.0011
10.8460	2.1962E-02	0.0006	14.8600	1.3098E-02	0.0006	18.0000	2.5614E-03	0.0011
	3.8 (minimum boundary)			z=135.391			to z=135.889	
4.4270	2.1732E-02	0.0007	11.0810	2.1534E-02	0.0006	15.0320	1.2627E-02	0.0007
4.9760	2.4643E-02	0.0007	11.3110	2.1102E-02	0.0006	15.2030	1.2155E-02	0.0007
5.4700	2.5857E-02	0.0006	11.5370	2.0682E-02	0.0006	15.3720	1.1708E-02	0.0007
5.9230	2.6411E-02	0.0006	11.7590	2.0224E-02	0.0006	15.5390	1.1237E-02	0.0007
6.3430	2.6583E-02	0.0006	11.9760	1.9788E-02	0.0006	15.7040	1.0775E-02	0.0007
6.7380	2.6606E-02	0.0006	12.1890	1.9358E-02	0.0006	15.8670	1.0307E-02	0.0007
7.1100	2.6512E-02	0.0006	12.3990	1.8915E-02	0.0006	16.0290	9.8316E-03	0.0007
7.4640	2.6325E-02	0.0006	12.6060	1.8483E-02	0.0006	16.1890	9.3370E-03	0.0008
7.8020	2.6078E-02	0.0006	12.8090	1.8022E-02	0.0006	16.3480	8.8497E-03	0.0008
8.1260	2.5781E-02	0.0006	13.0080	1.7572E-02	0.0006	16.5050	8.3589E-03	0.0008
8.4380	2.5477E-02	0.0006	13.2050	1.7135E-02	0.0006	16.6600	7.8611E-03	0.0008
8.7380	2.5144E-02	0.0006	13.3990	1.6700E-02	0.0006	16.8140	7.3446E-03	0.0008
9.0280	2.4777E-02	0.0006	13.5900	1.6242E-02	0.0006	16.9670	6.8204E-03	0.0009

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
9.3100	2.4391E-02	0.0006	13.7790	1.5796E-02	0.0006	17.1190	6.2816E-03	0.0009
9.5830	2.4007E-02	0.0006	13.9650	1.5349E-02	0.0006	17.2690	5.7244E-03	0.0009
9.8480	2.3630E-02	0.0006	14.1480	1.4908E-02	0.0006	17.4170	5.1692E-03	0.0010
10.1070	2.3232E-02	0.0006	14.3300	1.4455E-02	0.0006	17.5650	4.5738E-03	0.0010
10.3590	2.2810E-02	0.0006	14.5080	1.3983E-02	0.0006	17.7110	3.9539E-03	0.0011
10.6050	2.2401E-02	0.0006	14.6850	1.3536E-02	0.0006	17.8560	3.2976E-03	0.0011
10.8460	2.1958E-02	0.0006	14.8600	1.3088E-02	0.0007	18.0000	2.5629E-03	0.0011
3.8 (minimum boundary)			z=135.889			to z=136.388		
4.4270	2.1823E-02	0.0007	11.0810	2.1530E-02	0.0006	15.0320	1.2627E-02	0.0007
4.9760	2.4710E-02	0.0007	11.3110	2.1091E-02	0.0006	15.2030	1.2161E-02	0.0007
5.4700	2.5898E-02	0.0007	11.5370	2.0658E-02	0.0006	15.3720	1.1699E-02	0.0007
5.9230	2.6434E-02	0.0006	11.7590	2.0218E-02	0.0006	15.5390	1.1242E-02	0.0007
6.3430	2.6636E-02	0.0006	11.9760	1.9790E-02	0.0006	15.7040	1.0766E-02	0.0007
6.7380	2.6640E-02	0.0006	12.1890	1.9361E-02	0.0006	15.8670	1.0297E-02	0.0007
7.1100	2.6539E-02	0.0006	12.3990	1.8896E-02	0.0006	16.0290	9.8271E-03	0.0008
7.4640	2.6326E-02	0.0006	12.6060	1.8460E-02	0.0006	16.1890	9.3333E-03	0.0008
7.8020	2.6099E-02	0.0006	12.8090	1.8019E-02	0.0006	16.3480	8.8451E-03	0.0008
8.1260	2.5797E-02	0.0006	13.0080	1.7559E-02	0.0006	16.5050	8.3508E-03	0.0008
8.4380	2.5485E-02	0.0006	13.2050	1.7123E-02	0.0006	16.6600	7.8525E-03	0.0008
8.7380	2.5125E-02	0.0006	13.3990	1.6680E-02	0.0006	16.8140	7.3413E-03	0.0009
9.0280	2.4746E-02	0.0006	13.5900	1.6241E-02	0.0006	16.9670	6.8124E-03	0.0009
9.3100	2.4393E-02	0.0006	13.7790	1.5795E-02	0.0006	17.1190	6.2796E-03	0.0009
9.5830	2.4036E-02	0.0006	13.9650	1.5337E-02	0.0006	17.2690	5.7247E-03	0.0009
9.8480	2.3616E-02	0.0006	14.1480	1.4900E-02	0.0006	17.4170	5.1579E-03	0.0010
10.1070	2.3202E-02	0.0006	14.3300	1.4446E-02	0.0006	17.5650	4.5703E-03	0.0010
10.3590	2.2792E-02	0.0006	14.5080	1.3979E-02	0.0007	17.7110	3.9543E-03	0.0011
10.6050	2.2372E-02	0.0006	14.6850	1.3526E-02	0.0007	17.8560	3.2972E-03	0.0011
10.8460	2.1947E-02	0.0006	14.8600	1.3081E-02	0.0007	18.0000	2.5576E-03	0.0012
3.8 (minimum boundary)			z=136.388			to z=136.886		
4.4270	2.1934E-02	0.0007	11.0810	2.1497E-02	0.0006	15.0320	1.2606E-02	0.0007
4.9760	2.4797E-02	0.0007	11.3110	2.1060E-02	0.0006	15.2030	1.2151E-02	0.0007
5.4700	2.5978E-02	0.0007	11.5370	2.0643E-02	0.0006	15.3720	1.1682E-02	0.0007
5.9230	2.6509E-02	0.0007	11.7590	2.0193E-02	0.0006	15.5390	1.1224E-02	0.0007
6.3430	2.6700E-02	0.0006	11.9760	1.9739E-02	0.0006	15.7040	1.0763E-02	0.0008
6.7380	2.6710E-02	0.0006	12.1890	1.9313E-02	0.0006	15.8670	1.0291E-02	0.0008
7.1100	2.6575E-02	0.0006	12.3990	1.8885E-02	0.0006	16.0290	9.8194E-03	0.0008
7.4640	2.6375E-02	0.0006	12.6060	1.8430E-02	0.0006	16.1890	9.3343E-03	0.0008
7.8020	2.6101E-02	0.0006	12.8090	1.7989E-02	0.0006	16.3480	8.8552E-03	0.0008
8.1260	2.5811E-02	0.0006	13.0080	1.7544E-02	0.0006	16.5050	8.3497E-03	0.0008
8.4380	2.5482E-02	0.0006	13.2050	1.7100E-02	0.0006	16.6600	7.8464E-03	0.0009
8.7380	2.5160E-02	0.0006	13.3990	1.6665E-02	0.0006	16.8140	7.3403E-03	0.0009
9.0280	2.4787E-02	0.0006	13.5900	1.6217E-02	0.0006	16.9670	6.8106E-03	0.0009
9.3100	2.4410E-02	0.0006	13.7790	1.5774E-02	0.0006	17.1190	6.2722E-03	0.0009
9.5830	2.4000E-02	0.0006	13.9650	1.5332E-02	0.0007	17.2690	5.7222E-03	0.0010
9.8480	2.3593E-02	0.0006	14.1480	1.4873E-02	0.0007	17.4170	5.1532E-03	0.0010
10.1070	2.3183E-02	0.0006	14.3300	1.4445E-02	0.0007	17.5650	4.5686E-03	0.0011
10.3590	2.2763E-02	0.0006	14.5080	1.3990E-02	0.0007	17.7110	3.9496E-03	0.0011
10.6050	2.2345E-02	0.0006	14.6850	1.3514E-02	0.0007	17.8560	3.2958E-03	0.0012
10.8460	2.1934E-02	0.0006	14.8600	1.3054E-02	0.0007	18.0000	2.5590E-03	0.0012
3.8 (minimum boundary)			z=136.886			to z=137.385		
4.4270	2.2066E-02	0.0008	11.0810	2.1458E-02	0.0006	15.0320	1.2604E-02	0.0007
4.9760	2.4916E-02	0.0007	11.3110	2.1033E-02	0.0006	15.2030	1.2144E-02	0.0007

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
5.4700	2.6064E-02	0.0007	11.5370	2.0617E-02	0.0006	15.3720	1.1675E-02	0.0008
5.9230	2.6581E-02	0.0007	11.7590	2.0172E-02	0.0006	15.5390	1.1221E-02	0.0008
6.3430	2.6760E-02	0.0007	11.9760	1.9721E-02	0.0006	15.7040	1.0745E-02	0.0008
6.7380	2.6746E-02	0.0006	12.1890	1.9282E-02	0.0006	15.8670	1.0281E-02	0.0008
7.1100	2.6610E-02	0.0006	12.3990	1.8845E-02	0.0006	16.0290	9.8056E-03	0.0008
7.4640	2.6415E-02	0.0006	12.6060	1.8412E-02	0.0006	16.1890	9.3231E-03	0.0008
7.8020	2.6144E-02	0.0006	12.8090	1.7955E-02	0.0006	16.3480	8.8341E-03	0.0008
8.1260	2.5851E-02	0.0006	13.0080	1.7539E-02	0.0006	16.5050	8.3452E-03	0.0009
8.4380	2.5494E-02	0.0006	13.2050	1.7094E-02	0.0006	16.6600	7.8404E-03	0.0009
8.7380	2.5137E-02	0.0006	13.3990	1.6660E-02	0.0007	16.8140	7.3320E-03	0.0009
9.0280	2.4771E-02	0.0006	13.5900	1.6217E-02	0.0007	16.9670	6.8047E-03	0.0009
9.3100	2.4400E-02	0.0006	13.7790	1.5764E-02	0.0007	17.1190	6.2703E-03	0.0010
9.5830	2.3976E-02	0.0006	13.9650	1.5312E-02	0.0007	17.2690	5.7222E-03	0.0010
9.8480	2.3565E-02	0.0006	14.1480	1.4871E-02	0.0007	17.4170	5.1577E-03	0.0010
10.1070	2.3159E-02	0.0006	14.3300	1.4416E-02	0.0007	17.5650	4.5674E-03	0.0011
10.3590	2.2738E-02	0.0006	14.5080	1.3959E-02	0.0007	17.7110	3.9491E-03	0.0012
10.6050	2.2333E-02	0.0006	14.6850	1.3509E-02	0.0007	17.8560	3.2913E-03	0.0012
10.8460	2.1909E-02	0.0006	14.8600	1.3056E-02	0.0007	18.0000	2.5613E-03	0.0012
3.8 (minimum boundary)			z=137.385			to z=137.883		
4.4270	2.2237E-02	0.0008	11.0810	2.1436E-02	0.0006	15.0320	1.2594E-02	0.0008
4.9760	2.5062E-02	0.0008	11.3110	2.1015E-02	0.0006	15.2030	1.2135E-02	0.0008
5.4700	2.6162E-02	0.0007	11.5370	2.0559E-02	0.0006	15.3720	1.1681E-02	0.0008
5.9230	2.6640E-02	0.0007	11.7590	2.0117E-02	0.0006	15.5390	1.1214E-02	0.0008
6.3430	2.6793E-02	0.0007	11.9760	1.9702E-02	0.0007	15.7040	1.0747E-02	0.0008
6.7380	2.6772E-02	0.0007	12.1890	1.9270E-02	0.0007	15.8670	1.0272E-02	0.0008
7.1100	2.6638E-02	0.0007	12.3990	1.8815E-02	0.0007	16.0290	9.8031E-03	0.0008
7.4640	2.6407E-02	0.0007	12.6060	1.8389E-02	0.0007	16.1890	9.3277E-03	0.0008
7.8020	2.6145E-02	0.0007	12.8090	1.7949E-02	0.0007	16.3480	8.8385E-03	0.0009
8.1260	2.5821E-02	0.0006	13.0080	1.7521E-02	0.0007	16.5050	8.3472E-03	0.0009
8.4380	2.5499E-02	0.0006	13.2050	1.7067E-02	0.0007	16.6600	7.8477E-03	0.0009
8.7380	2.5124E-02	0.0006	13.3990	1.6652E-02	0.0007	16.8140	7.3385E-03	0.0009
9.0280	2.4745E-02	0.0006	13.5900	1.6210E-02	0.0007	16.9670	6.8196E-03	0.0010
9.3100	2.4369E-02	0.0006	13.7790	1.5763E-02	0.0007	17.1190	6.2817E-03	0.0010
9.5830	2.3939E-02	0.0006	13.9650	1.5312E-02	0.0007	17.2690	5.7284E-03	0.0010
9.8480	2.3548E-02	0.0006	14.1480	1.4854E-02	0.0007	17.4170	5.1645E-03	0.0011
10.1070	2.3131E-02	0.0006	14.3300	1.4401E-02	0.0007	17.5650	4.5755E-03	0.0011
10.3590	2.2718E-02	0.0006	14.5080	1.3959E-02	0.0007	17.7110	3.9619E-03	0.0012
10.6050	2.2309E-02	0.0006	14.6850	1.3501E-02	0.0007	17.8560	3.2971E-03	0.0013
10.8460	2.1867E-02	0.0006	14.8600	1.3046E-02	0.0008	18.0000	2.5632E-03	0.0013
3.8 (minimum boundary)			z=137.883			to z=138.382		
4.4270	2.2471E-02	0.0008	11.0810	2.1404E-02	0.0007	15.0320	1.2579E-02	0.0008
4.9760	2.5229E-02	0.0008	11.3110	2.0958E-02	0.0007	15.2030	1.2136E-02	0.0008
5.4700	2.6308E-02	0.0008	11.5370	2.0548E-02	0.0007	15.3720	1.1663E-02	0.0008
5.9230	2.6745E-02	0.0007	11.7590	2.0120E-02	0.0007	15.5390	1.1202E-02	0.0008
6.3430	2.6851E-02	0.0007	11.9760	1.9693E-02	0.0007	15.7040	1.0740E-02	0.0008
6.7380	2.6816E-02	0.0007	12.1890	1.9252E-02	0.0007	15.8670	1.0274E-02	0.0008
7.1100	2.6639E-02	0.0007	12.3990	1.8791E-02	0.0007	16.0290	9.7999E-03	0.0009
7.4640	2.6400E-02	0.0007	12.6060	1.8371E-02	0.0007	16.1890	9.3223E-03	0.0009
7.8020	2.6149E-02	0.0007	12.8090	1.7949E-02	0.0007	16.3480	8.8361E-03	0.0009
8.1260	2.5844E-02	0.0007	13.0080	1.7487E-02	0.0007	16.5050	8.3533E-03	0.0009
8.4380	2.5475E-02	0.0007	13.2050	1.7047E-02	0.0007	16.6600	7.8520E-03	0.0010
8.7380	2.5110E-02	0.0007	13.3990	1.6612E-02	0.0007	16.8140	7.3355E-03	0.0010

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
9.0280	2.4716E-02	0.0007	13.5900	1.6168E-02	0.0007	16.9670	6.8160E-03	0.0010
9.3100	2.4298E-02	0.0007	13.7790	1.5735E-02	0.0007	17.1190	6.2786E-03	0.0010
9.5830	2.3898E-02	0.0007	13.9650	1.5296E-02	0.0007	17.2690	5.7291E-03	0.0011
9.8480	2.3521E-02	0.0007	14.1480	1.4840E-02	0.0007	17.4170	5.1686E-03	0.0011
10.1070	2.3112E-02	0.0007	14.3300	1.4381E-02	0.0008	17.5650	4.5824E-03	0.0012
10.3590	2.2694E-02	0.0007	14.5080	1.3948E-02	0.0008	17.7110	3.9658E-03	0.0013
10.6050	2.2262E-02	0.0007	14.6850	1.3490E-02	0.0008	17.8560	3.3077E-03	0.0013
10.8460	2.1817E-02	0.0007	14.8600	1.3041E-02	0.0008	18.0000	2.5699E-03	0.0013
3.8 (minimum boundary)			z=138.382			to z=138.880		
4.4270	2.2794E-02	0.0008	11.0810	2.1375E-02	0.0007	15.0320	1.2580E-02	0.0008
4.9760	2.5449E-02	0.0008	11.3110	2.0944E-02	0.0007	15.2030	1.2121E-02	0.0008
5.4700	2.6489E-02	0.0008	11.5370	2.0510E-02	0.0007	15.3720	1.1658E-02	0.0008
5.9230	2.6858E-02	0.0008	11.7590	2.0098E-02	0.0007	15.5390	1.1195E-02	0.0009
6.3430	2.6913E-02	0.0008	11.9760	1.9643E-02	0.0007	15.7040	1.0732E-02	0.0009
6.7380	2.6854E-02	0.0007	12.1890	1.9209E-02	0.0007	15.8670	1.0275E-02	0.0009
7.1100	2.6688E-02	0.0007	12.3990	1.8766E-02	0.0007	16.0290	9.7993E-03	0.0009
7.4640	2.6409E-02	0.0007	12.6060	1.8347E-02	0.0007	16.1890	9.3141E-03	0.0009
7.8020	2.6140E-02	0.0007	12.8090	1.7905E-02	0.0007	16.3480	8.8233E-03	0.0009
8.1260	2.5820E-02	0.0007	13.0080	1.7447E-02	0.0007	16.5050	8.3485E-03	0.0010
8.4380	2.5427E-02	0.0007	13.2050	1.7021E-02	0.0007	16.6600	7.8484E-03	0.0010
8.7380	2.5066E-02	0.0007	13.3990	1.6582E-02	0.0008	16.8140	7.3357E-03	0.0010
9.0280	2.4683E-02	0.0007	13.5900	1.6127E-02	0.0008	16.9670	6.8212E-03	0.0011
9.3100	2.4283E-02	0.0007	13.7790	1.5704E-02	0.0008	17.1190	6.2923E-03	0.0011
9.5830	2.3876E-02	0.0007	13.9650	1.5259E-02	0.0008	17.2690	5.7477E-03	0.0011
9.8480	2.3496E-02	0.0007	14.1480	1.4794E-02	0.0008	17.4170	5.1878E-03	0.0012
10.1070	2.3062E-02	0.0007	14.3300	1.4361E-02	0.0008	17.5650	4.5939E-03	0.0012
10.3590	2.2615E-02	0.0007	14.5080	1.3919E-02	0.0008	17.7110	3.9776E-03	0.0013
10.6050	2.2216E-02	0.0007	14.6850	1.3476E-02	0.0008	17.8560	3.3162E-03	0.0014
10.8460	2.1804E-02	0.0007	14.8600	1.3026E-02	0.0008	18.0000	2.5756E-03	0.0014
3.8 (minimum boundary)			z=138.880			to z=139.379		
4.4270	2.3211E-02	0.0009	11.0810	2.1328E-02	0.0007	15.0320	1.2569E-02	0.0009
4.9760	2.5793E-02	0.0008	11.3110	2.0893E-02	0.0008	15.2030	1.2114E-02	0.0009
5.4700	2.6646E-02	0.0008	11.5370	2.0468E-02	0.0008	15.3720	1.1648E-02	0.0009
5.9230	2.6979E-02	0.0008	11.7590	2.0034E-02	0.0008	15.5390	1.1204E-02	0.0009
6.3430	2.7013E-02	0.0008	11.9760	1.9593E-02	0.0008	15.7040	1.0751E-02	0.0009
6.7380	2.6870E-02	0.0008	12.1890	1.9167E-02	0.0008	15.8670	1.0270E-02	0.0009
7.1100	2.6687E-02	0.0008	12.3990	1.8721E-02	0.0008	16.0290	9.7899E-03	0.0010
7.4640	2.6433E-02	0.0008	12.6060	1.8290E-02	0.0008	16.1890	9.3234E-03	0.0010
7.8020	2.6151E-02	0.0008	12.8090	1.7844E-02	0.0008	16.3480	8.8392E-03	0.0010
8.1260	2.5807E-02	0.0008	13.0080	1.7409E-02	0.0008	16.5050	8.3561E-03	0.0010
8.4380	2.5420E-02	0.0008	13.2050	1.6983E-02	0.0008	16.6600	7.8550E-03	0.0011
8.7380	2.5024E-02	0.0007	13.3990	1.6538E-02	0.0008	16.8140	7.3453E-03	0.0011
9.0280	2.4631E-02	0.0007	13.5900	1.6097E-02	0.0008	16.9670	6.8255E-03	0.0011
9.3100	2.4219E-02	0.0007	13.7790	1.5663E-02	0.0008	17.1190	6.3060E-03	0.0012
9.5830	2.3811E-02	0.0007	13.9650	1.5226E-02	0.0008	17.2690	5.7602E-03	0.0012
9.8480	2.3396E-02	0.0007	14.1480	1.4792E-02	0.0008	17.4170	5.1916E-03	0.0013
10.1070	2.3003E-02	0.0007	14.3300	1.4348E-02	0.0008	17.5650	4.6042E-03	0.0013
10.3590	2.2573E-02	0.0007	14.5080	1.3897E-02	0.0008	17.7110	3.9885E-03	0.0014
10.6050	2.2177E-02	0.0007	14.6850	1.3441E-02	0.0008	17.8560	3.3339E-03	0.0014
10.8460	2.1744E-02	0.0007	14.8600	1.3006E-02	0.0009	18.0000	2.5957E-03	0.0015
3.8 (minimum boundary)			z=139.379			to z=139.877		
4.4270	2.3835E-02	0.0009	11.0810	2.1236E-02	0.0008	15.0320	1.2537E-02	0.0009

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
4.9760	2.6155E-02	0.0009	11.3110	2.0794E-02	0.0008	15.2030	1.2092E-02	0.0009
5.4700	2.6912E-02	0.0009	11.5370	2.0374E-02	0.0008	15.3720	1.1659E-02	0.0010
5.9230	2.7115E-02	0.0009	11.7590	1.9949E-02	0.0008	15.5390	1.1199E-02	0.0010
6.3430	2.7094E-02	0.0008	11.9760	1.9532E-02	0.0008	15.7040	1.0741E-02	0.0010
6.7380	2.6913E-02	0.0008	12.1890	1.9105E-02	0.0008	15.8670	1.0287E-02	0.0010
7.1100	2.6698E-02	0.0008	12.3990	1.8675E-02	0.0008	16.0290	9.8159E-03	0.0010
7.4640	2.6416E-02	0.0008	12.6060	1.8232E-02	0.0008	16.1890	9.3614E-03	0.0010
7.8020	2.6053E-02	0.0008	12.8090	1.7808E-02	0.0008	16.3480	8.8667E-03	0.0011
8.1260	2.5713E-02	0.0008	13.0080	1.7386E-02	0.0008	16.5050	8.3744E-03	0.0011
8.4380	2.5333E-02	0.0008	13.2050	1.6931E-02	0.0008	16.6600	7.8819E-03	0.0011
8.7380	2.4970E-02	0.0008	13.3990	1.6484E-02	0.0008	16.8140	7.3793E-03	0.0011
9.0280	2.4553E-02	0.0008	13.5900	1.6058E-02	0.0008	16.9670	6.8631E-03	0.0012
9.3100	2.4125E-02	0.0008	13.7790	1.5610E-02	0.0009	17.1190	6.3360E-03	0.0012
9.5830	2.3733E-02	0.0008	13.9650	1.5197E-02	0.0009	17.2690	5.7833E-03	0.0013
9.8480	2.3335E-02	0.0008	14.1480	1.4770E-02	0.0009	17.4170	5.2289E-03	0.0013
10.1070	2.2960E-02	0.0008	14.3300	1.4330E-02	0.0009	17.5650	4.6429E-03	0.0014
10.3590	2.2507E-02	0.0008	14.5080	1.3873E-02	0.0009	17.7110	4.0157E-03	0.0015
10.6050	2.2115E-02	0.0008	14.6850	1.3429E-02	0.0009	17.8560	3.3560E-03	0.0015
10.8460	2.1676E-02	0.0008	14.8600	1.2982E-02	0.0009	18.0000	2.6155E-03	0.0016
3.8 (minimum boundary)			z=139.877			to z=140.376		
4.4270	2.4465E-02	0.0010	11.0810	2.1153E-02	0.0009	15.0320	1.2538E-02	0.0010
4.9760	2.6690E-02	0.0010	11.3110	2.0728E-02	0.0009	15.2030	1.2106E-02	0.0010
5.4700	2.7217E-02	0.0009	11.5370	2.0292E-02	0.0009	15.3720	1.1673E-02	0.0010
5.9230	2.7283E-02	0.0009	11.7590	1.9855E-02	0.0009	15.5390	1.1218E-02	0.0010
6.3430	2.7209E-02	0.0009	11.9760	1.9421E-02	0.0009	15.7040	1.0749E-02	0.0011
6.7380	2.6951E-02	0.0009	12.1890	1.9008E-02	0.0009	15.8670	1.0290E-02	0.0011
7.1100	2.6696E-02	0.0009	12.3990	1.8599E-02	0.0009	16.0290	9.8359E-03	0.0011
7.4640	2.6365E-02	0.0009	12.6060	1.8128E-02	0.0009	16.1890	9.3635E-03	0.0011
7.8020	2.5983E-02	0.0009	12.8090	1.7741E-02	0.0009	16.3480	8.8828E-03	0.0011
8.1260	2.5602E-02	0.0009	13.0080	1.7317E-02	0.0009	16.5050	8.4020E-03	0.0012
8.4380	2.5247E-02	0.0009	13.2050	1.6867E-02	0.0009	16.6600	7.9168E-03	0.0012
8.7380	2.4885E-02	0.0009	13.3990	1.6448E-02	0.0009	16.8140	7.4081E-03	0.0012
9.0280	2.4446E-02	0.0009	13.5900	1.6000E-02	0.0009	16.9670	6.9094E-03	0.0013
9.3100	2.4027E-02	0.0008	13.7790	1.5582E-02	0.0009	17.1190	6.3813E-03	0.0013
9.5830	2.3632E-02	0.0008	13.9650	1.5158E-02	0.0009	17.2690	5.8203E-03	0.0014
9.8480	2.3261E-02	0.0008	14.1480	1.4711E-02	0.0009	17.4170	5.2529E-03	0.0014
10.1070	2.2856E-02	0.0008	14.3300	1.4293E-02	0.0009	17.5650	4.6690E-03	0.0015
10.3590	2.2403E-02	0.0008	14.5080	1.3858E-02	0.0010	17.7110	4.0534E-03	0.0016
10.6050	2.1985E-02	0.0008	14.6850	1.3414E-02	0.0010	17.8560	3.3804E-03	0.0016
10.8460	2.1570E-02	0.0009	14.8600	1.2975E-02	0.0010	18.0000	2.6388E-03	0.0017
3.8 (minimum boundary)			z=140.376			to z=140.874		
4.4270	2.5889E-02	0.0010	11.0810	2.0993E-02	0.0009	15.0320	1.2563E-02	0.0011
4.9760	2.7374E-02	0.0010	11.3110	2.0565E-02	0.0009	15.2030	1.2107E-02	0.0011
5.4700	2.7585E-02	0.0010	11.5370	2.0173E-02	0.0010	15.3720	1.1679E-02	0.0011
5.9230	2.7509E-02	0.0010	11.7590	1.9722E-02	0.0010	15.5390	1.1243E-02	0.0011
6.3430	2.7274E-02	0.0010	11.9760	1.9259E-02	0.0010	15.7040	1.0787E-02	0.0012
6.7380	2.6984E-02	0.0010	12.1890	1.8869E-02	0.0010	15.8670	1.0322E-02	0.0012
7.1100	2.6630E-02	0.0010	12.3990	1.8477E-02	0.0010	16.0290	9.8708E-03	0.0012
7.4640	2.6239E-02	0.0010	12.6060	1.8040E-02	0.0010	16.1890	9.4161E-03	0.0012
7.8020	2.5865E-02	0.0010	12.8090	1.7622E-02	0.0010	16.3480	8.9387E-03	0.0013
8.1260	2.5459E-02	0.0010	13.0080	1.7198E-02	0.0010	16.5050	8.4574E-03	0.0013
8.4380	2.5080E-02	0.0009	13.2050	1.6797E-02	0.0010	16.6600	7.9846E-03	0.0013

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table C-3. Radial distributions of fission neutrons (cont)

Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error	Radial layer outer boundary (cm)	Layer probability	Rel. error
8.7380	2.4722E-02	0.0009	13.3990	1.6356E-02	0.0010	16.8140	7.4918E-03	0.0014
9.0280	2.4317E-02	0.0009	13.5900	1.5941E-02	0.0010	16.9670	6.9732E-03	0.0014
9.3100	2.3893E-02	0.0009	13.7790	1.5516E-02	0.0010	17.1190	6.4492E-03	0.0014
9.5830	2.3505E-02	0.0009	13.9650	1.5071E-02	0.0010	17.2690	5.9132E-03	0.0015
9.8480	2.3087E-02	0.0009	14.1480	1.4679E-02	0.0010	17.4170	5.3424E-03	0.0016
10.1070	2.2682E-02	0.0009	14.3300	1.4266E-02	0.0010	17.5650	4.7483E-03	0.0016
10.3590	2.2284E-02	0.0009	14.5080	1.3826E-02	0.0011	17.7110	4.1294E-03	0.0017
10.6050	2.1842E-02	0.0009	14.6850	1.3417E-02	0.0011	17.8560	3.4609E-03	0.0018
10.8460	2.1419E-02	0.0009	14.8600	1.2990E-02	0.0011	18.0000	2.7089E-03	0.0018
3.8 (minimum boundary)			z=140.874			to z=141.373		
4.4270	2.7980E-02	0.0011	11.0810	2.0751E-02	0.0011	15.0320	1.2569E-02	0.0013
4.9760	2.8247E-02	0.0012	11.3110	2.0327E-02	0.0011	15.2030	1.2132E-02	0.0013
5.4700	2.7994E-02	0.0012	11.5370	1.9964E-02	0.0011	15.3720	1.1704E-02	0.0013
5.9230	2.7649E-02	0.0011	11.7590	1.9545E-02	0.0011	15.5390	1.1285E-02	0.0013
6.3430	2.7329E-02	0.0011	11.9760	1.9131E-02	0.0011	15.7040	1.0843E-02	0.0013
6.7380	2.6905E-02	0.0011	12.1890	1.8708E-02	0.0011	15.8670	1.0399E-02	0.0014
7.1100	2.6521E-02	0.0011	12.3990	1.8287E-02	0.0011	16.0290	9.9593E-03	0.0014
7.4640	2.6117E-02	0.0011	12.6060	1.7877E-02	0.0011	16.1890	9.5054E-03	0.0014
7.8020	2.5644E-02	0.0011	12.8090	1.7468E-02	0.0011	16.3480	9.0465E-03	0.0014
8.1260	2.5241E-02	0.0011	13.0080	1.7071E-02	0.0011	16.5050	8.5694E-03	0.0015
8.4380	2.4878E-02	0.0011	13.2050	1.6654E-02	0.0011	16.6600	8.0946E-03	0.0015
8.7380	2.4451E-02	0.0011	13.3990	1.6252E-02	0.0011	16.8140	7.6057E-03	0.0015
9.0280	2.4067E-02	0.0011	13.5900	1.5839E-02	0.0012	16.9670	7.1164E-03	0.0016
9.3100	2.3643E-02	0.0011	13.7790	1.5442E-02	0.0012	17.1190	6.6187E-03	0.0016
9.5830	2.3241E-02	0.0011	13.9650	1.5028E-02	0.0012	17.2690	6.0686E-03	0.0017
9.8480	2.2844E-02	0.0011	14.1480	1.4591E-02	0.0012	17.4170	5.5070E-03	0.0018
10.1070	2.2432E-02	0.0011	14.3300	1.4178E-02	0.0012	17.5650	4.9170E-03	0.0018
10.3590	2.2055E-02	0.0011	14.5080	1.3762E-02	0.0012	17.7110	4.3016E-03	0.0019
10.6050	2.1612E-02	0.0011	14.6850	1.3376E-02	0.0012	17.8560	3.6229E-03	0.0020
10.8460	2.1196E-02	0.0011	14.8600	1.2981E-02	0.0012	18.0000	2.8559E-03	0.0020
3.8 (minimum boundary)			z=141.373			to z=141.871		
4.4270	3.1919E-02	0.0012	11.0810	2.0379E-02	0.0013	15.0320	1.2559E-02	0.0015
4.9760	2.9488E-02	0.0013	11.3110	2.0004E-02	0.0013	15.2030	1.2151E-02	0.0015
5.4700	2.8372E-02	0.0013	11.5370	1.9568E-02	0.0013	15.3720	1.1768E-02	0.0015
5.9230	2.7672E-02	0.0013	11.7590	1.9145E-02	0.0013	15.5390	1.1400E-02	0.0015
6.3430	2.7159E-02	0.0013	11.9760	1.8795E-02	0.0013	15.7040	1.0982E-02	0.0016
6.7380	2.6560E-02	0.0013	12.1890	1.8390E-02	0.0013	15.8670	1.0600E-02	0.0016
7.1100	2.6207E-02	0.0013	12.3990	1.8000E-02	0.0013	16.0290	1.0198E-02	0.0016
7.4640	2.5676E-02	0.0013	12.6060	1.7641E-02	0.0013	16.1890	9.7285E-03	0.0016
7.8020	2.5201E-02	0.0013	12.8090	1.7227E-02	0.0013	16.3480	9.2988E-03	0.0017
8.1260	2.4794E-02	0.0013	13.0080	1.6825E-02	0.0014	16.5050	8.8447E-03	0.0017
8.4380	2.4415E-02	0.0013	13.2050	1.6428E-02	0.0014	16.6600	8.4017E-03	0.0018
8.7380	2.3981E-02	0.0013	13.3990	1.6061E-02	0.0014	16.8140	7.9293E-03	0.0018
9.0280	2.3565E-02	0.0013	13.5900	1.5640E-02	0.0014	16.9670	7.4652E-03	0.0018
9.3100	2.3219E-02	0.0013	13.7790	1.5270E-02	0.0014	17.1190	6.9928E-03	0.0019
9.5830	2.2788E-02	0.0013	13.9650	1.4891E-02	0.0014	17.2690	6.4877E-03	0.0019
9.8480	2.2347E-02	0.0013	14.1480	1.4472E-02	0.0014	17.4170	5.9632E-03	0.0020
10.1070	2.1954E-02	0.0013	14.3300	1.4101E-02	0.0014	17.5650	5.4068E-03	0.0021
10.3590	2.1517E-02	0.0013	14.5080	1.3689E-02	0.0014	17.7110	4.7977E-03	0.0022
10.6050	2.1141E-02	0.0013	14.6850	1.3330E-02	0.0015	17.8560	4.1272E-03	0.0023
10.8460	2.0781E-02	0.0013	14.8600	1.2940E-02	0.0015	18.0000	3.3445E-03	0.0023

**NEA/NSC/DOC(95)03/VIII
Volume VIII**

ALARM-TRAN-AIR-SHIELD-001

ALARM-TRAN-AIR-SHIELD-001

APPENDIX D: TLD PHOTON DOSE RESPONSE FUNCTION

D.1 TLD Photon Dose Response Function

The response function used to model the TLD absorbed dose (Fig. 4-13) was taken from SCALE 6.2, which is based on data in ICRU-57 Table A-2. This response function is a set of flux-to-dose conversion factors, where the dose is actually kerma in air. There are a few important differences between the values used in the benchmark simulations and SCALE 6.2. Furthermore, there are some differences between the values in SCALE 6.2 and ICRU-57.

The difference between the response used in the benchmark simulations and SCALE 6.2 are the upper and lower cutoff energies. In SCALE 6.2 the upper and lower cutoff energies are 20 MeV and 10 keV, respectively. In the benchmark simulations, these have been changed to 50 MeV and 1 keV. The value of the response function at 20 MeV is applied for all energies between 20 and 50 MeV. Similarly, the value of the response function at 10 keV is applied for all energies between 10 and 1 keV.

The values of this response function in ICRU-57 are actually energy and response pairs. In other words, the response function is defined at specific points, and the user typically interpolates between the points to find values of the response function at other energies. Furthermore, the maximum energy define in ICRU-57 is 10 MeV. SCALE 6.2 has extrapolated the data provided in ICRU-57 to provide response function data up to 20 MeV. Then SCALE 6.2 created a multi-group representation of the response function assuming that linear interpolation should be used between all data points.

Since this is a set of air kerma flux-to-dose conversion factors, it is usually more appropriate not to model the actual dosimeter and instead model a volume of air. The evaluators have determined for this benchmark that the CEA Al₂O₃ TLD body and powder do not have a statistically significant impact on the simulations, so the TLD geometry may or may not be included in the benchmark model geometry without any negative effects.

Numerical values of the data plotted in Fig. 4-13 are provided in Table D-1.

**Table D-1. Benchmark model representation of the ICRU-57
air kerma flux-to-dose conversion factors**

Upper energy boundary (MeV)	Response function						
50.000	1.1951E-07	4.000	4.1435E-08	1.330	1.9515E-08	0.200	2.6207E-09
20.000	1.1951E-07	3.500	3.7637E-08	1.200	1.7427E-08	0.150	1.7495E-09
14.000	1.0043E-07	3.000	3.4683E-08	1.000	1.5428E-08	0.100	1.2158E-09
12.000	8.8460E-08	2.750	3.2756E-08	0.900	1.4024E-08	0.075	1.0891E-09
10.000	7.6856E-08	2.500	3.1096E-08	0.800	1.2573E-08	0.070	1.0678E-09
8.000	6.8703E-08	2.350	2.9502E-08	0.700	1.1043E-08	0.060	1.1534E-09
7.500	6.5611E-08	2.150	2.7799E-08	0.600	9.5032E-09	0.045	1.7983E-09
7.000	6.2298E-08	2.000	2.6119E-08	0.512	8.7655E-09	0.030	4.0914E-09
6.500	5.8730E-08	1.800	2.4498E-08	0.510	8.2314E-09	0.020	1.1697E-08
6.000	5.5245E-08	1.660	2.3309E-08	0.450	7.2691E-09	0.001	
5.500	5.1825E-08	1.570	2.2428E-08	0.400	5.8857E-09		
5.000	4.8423E-08	1.500	2.1733E-08	0.300	4.6349E-09		
4.500	4.5003E-08	1.440	2.0851E-08	0.260	3.6917E-09		

ALARM-TRAN-AIR-SHIELD-001

APPENDIX E: GRAPHICAL COMPARISON BETWEEN CALCULATION AND EXPERIMENT

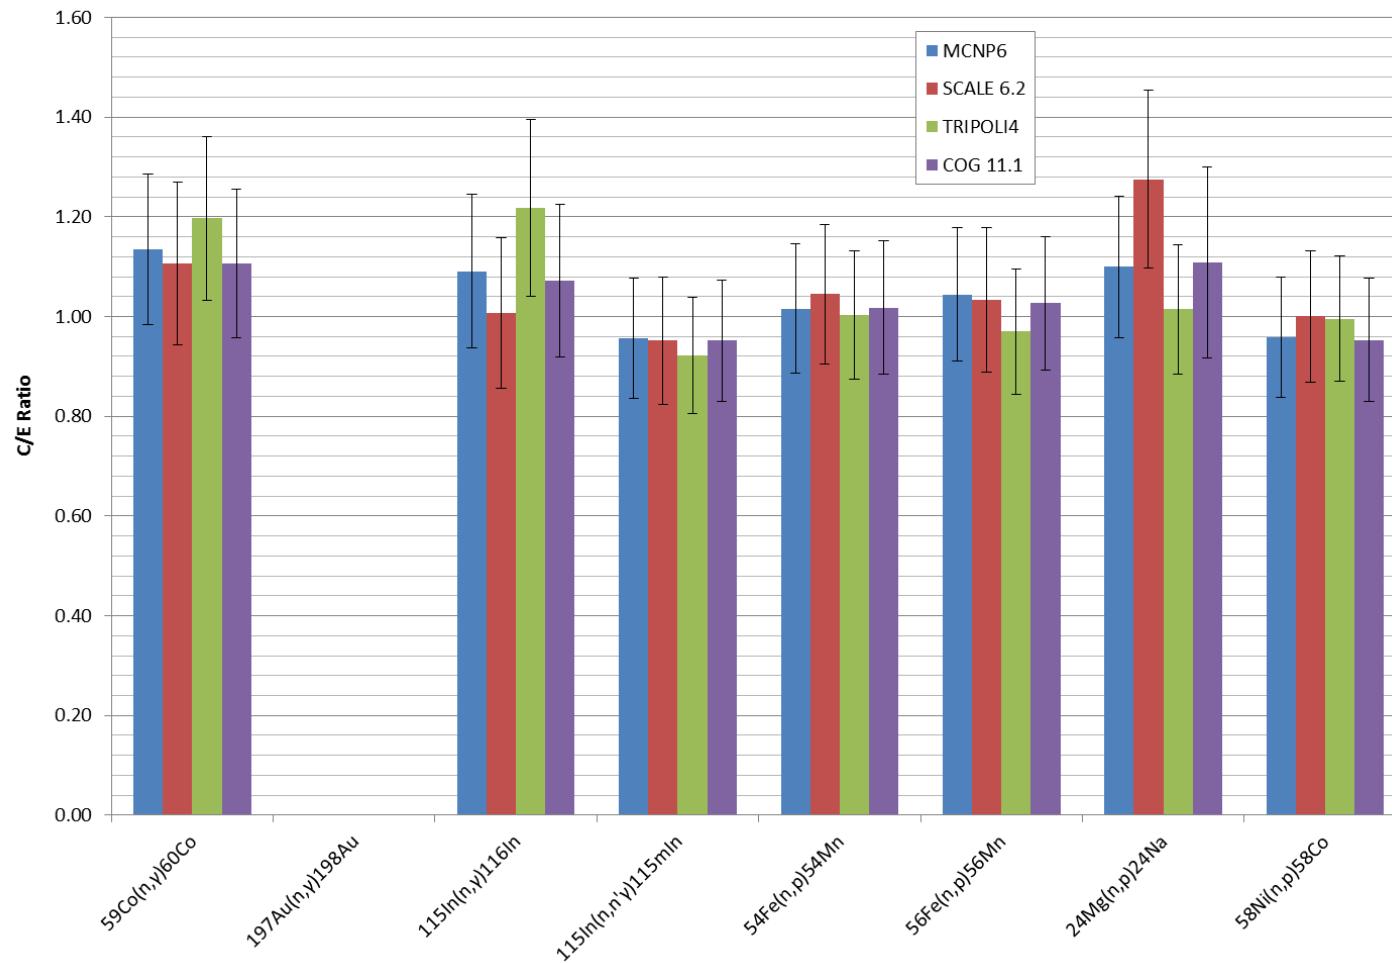


Fig. E-1. Case 1 collimator A neutron activation foil code-to-code comparison of c/e ratios with 2-sigma error bars.

ALARM-TRAN-AIR-SHIELD-001

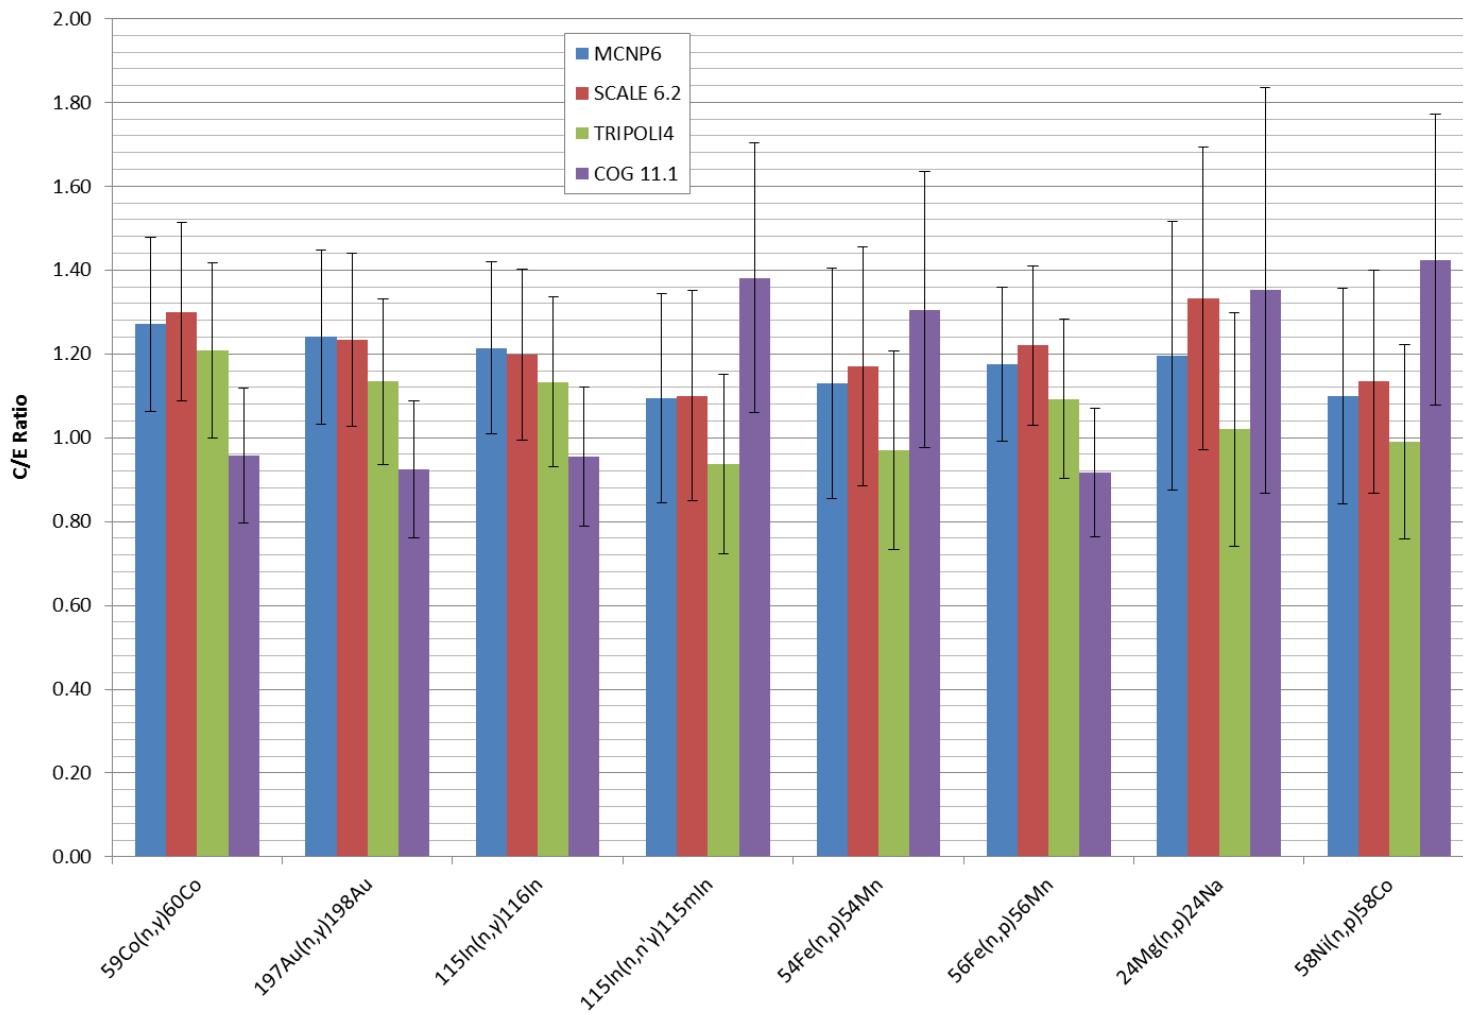


Fig. E-2. Case 2 collimator B neutron activation foil code-to-code comparison of C/E ratios with 2-sigma error bars.

ALARM-TRAN-AIR-SHIELD-001

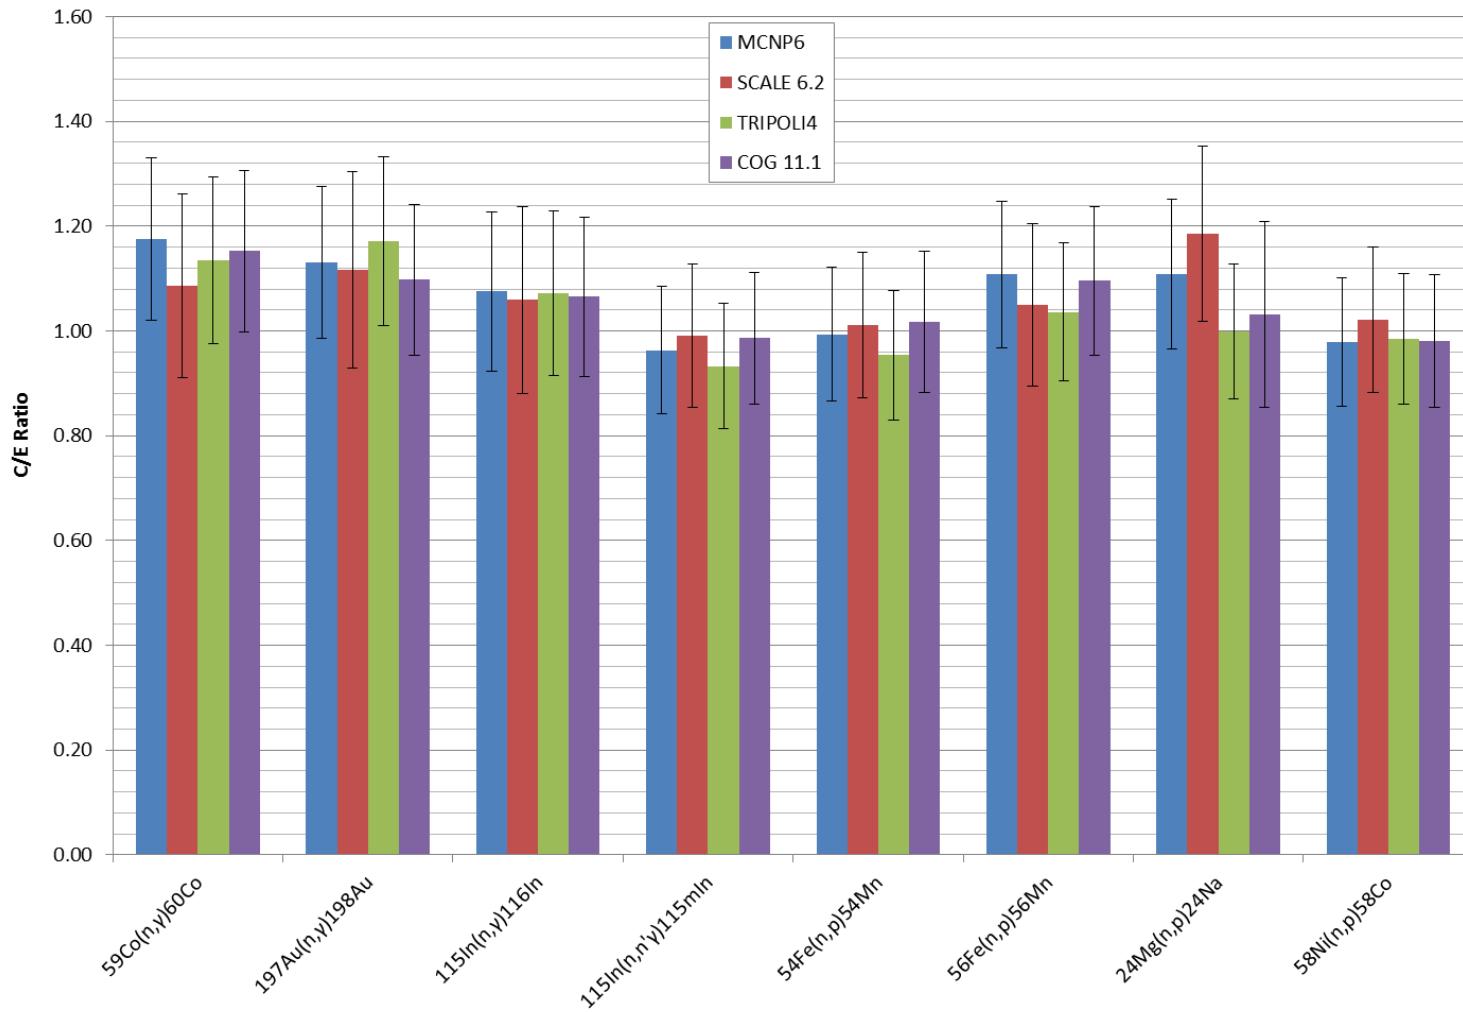


Fig. E-3. Case 3 free field location neutron activation foil code-to-code comparison of C/E ratios with 2-sigma error bars.

ALARM-TRAN-AIR-SHIELD-001

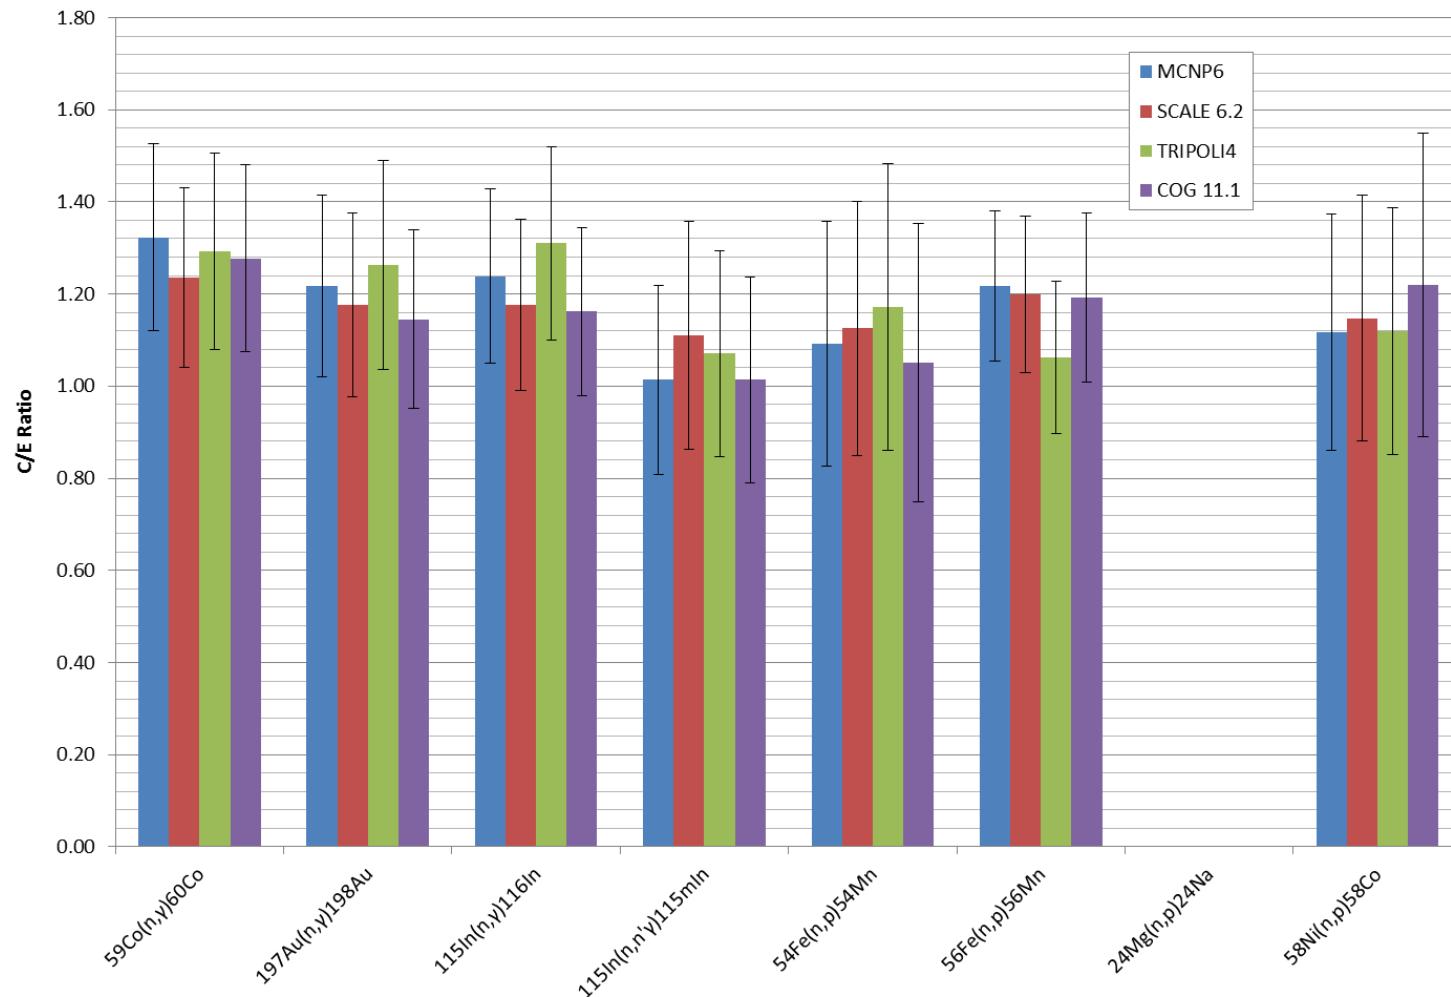


Fig. E-4. Case 4 scattering box position 1 neutron activation foil code-to-code comparison of C/E ratios with 2-sigma error bars.

ALARM-TRAN-AIR-SHIELD-001

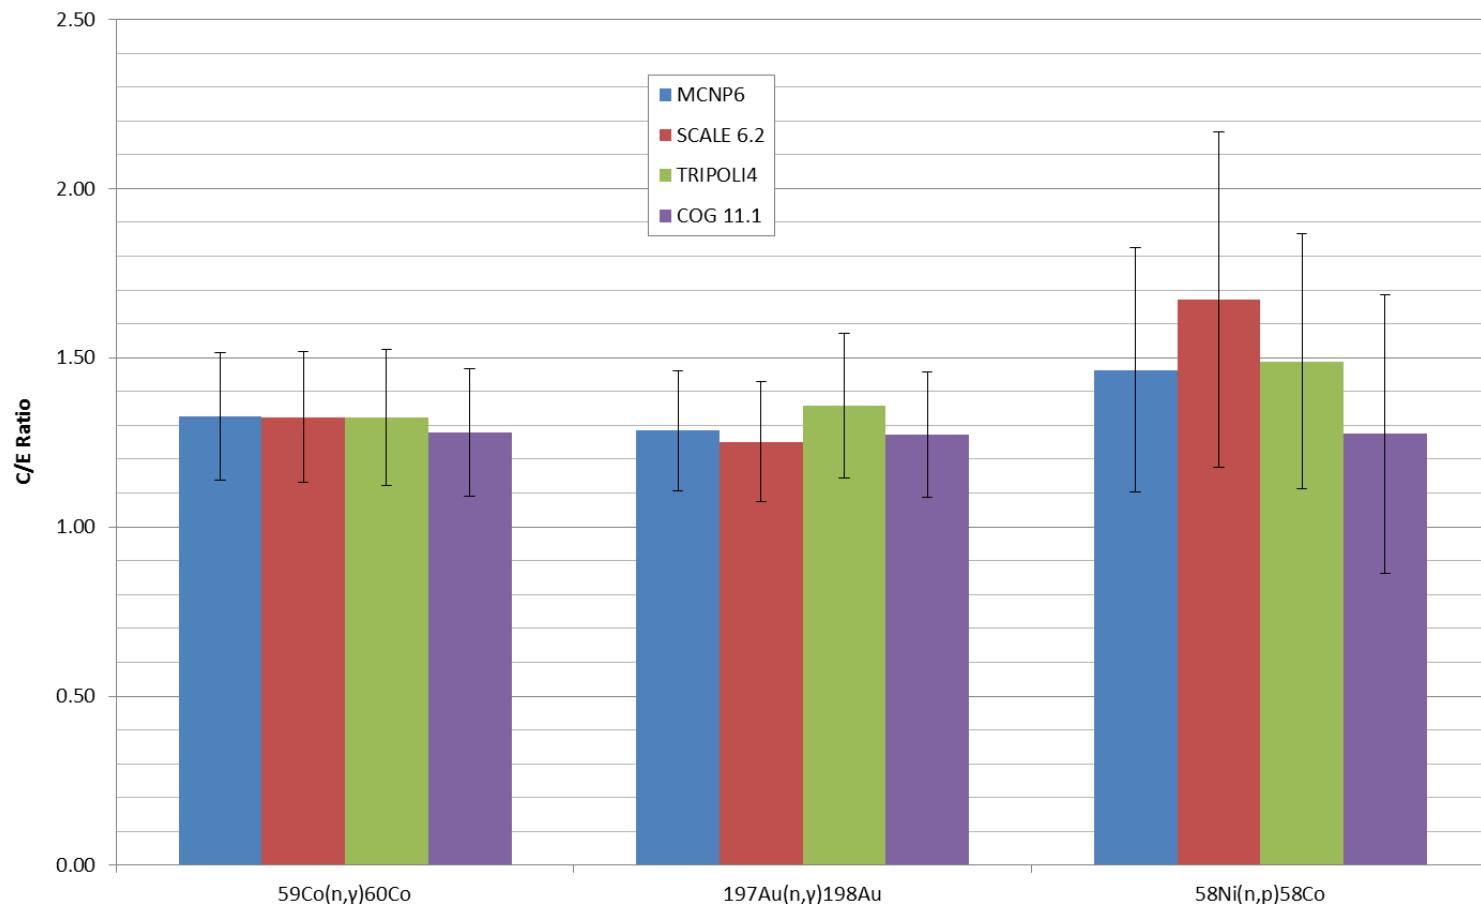


Fig. E-5. Case 5 scattering box position 2 neutron activation foil code-to-code comparison of C/E ratios with 2-sigma error bars.

ALARM-TRAN-AIR-SHIELD-001

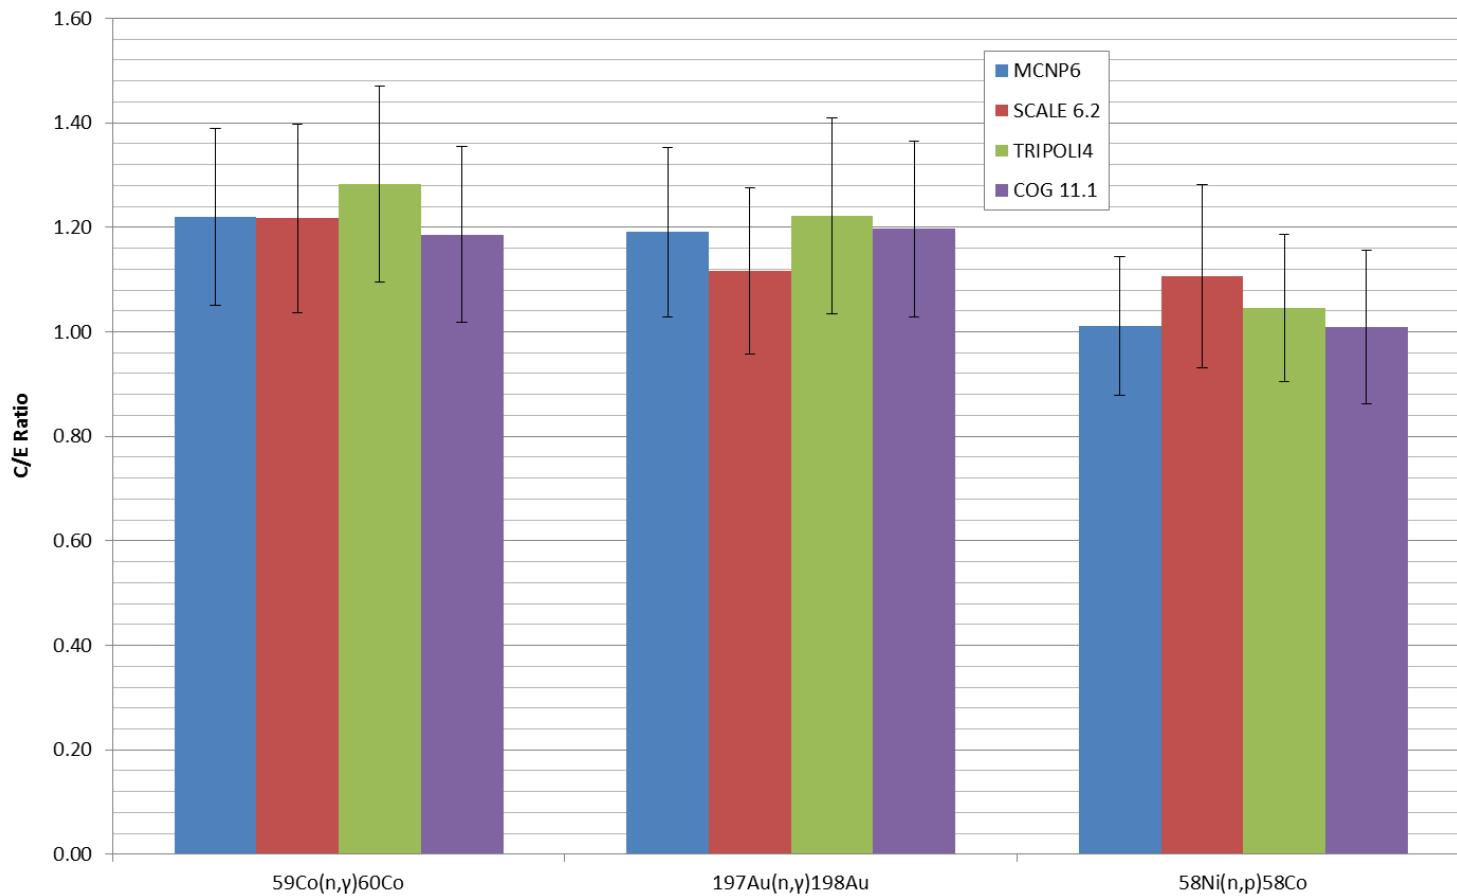


Fig. E-6. Case 6 scattering box position 3 neutron activation foil code-to-code comparison of C/E Ratios with 2-sigma error bars.

ALARM-TRAN-AIR-SHIELD-001

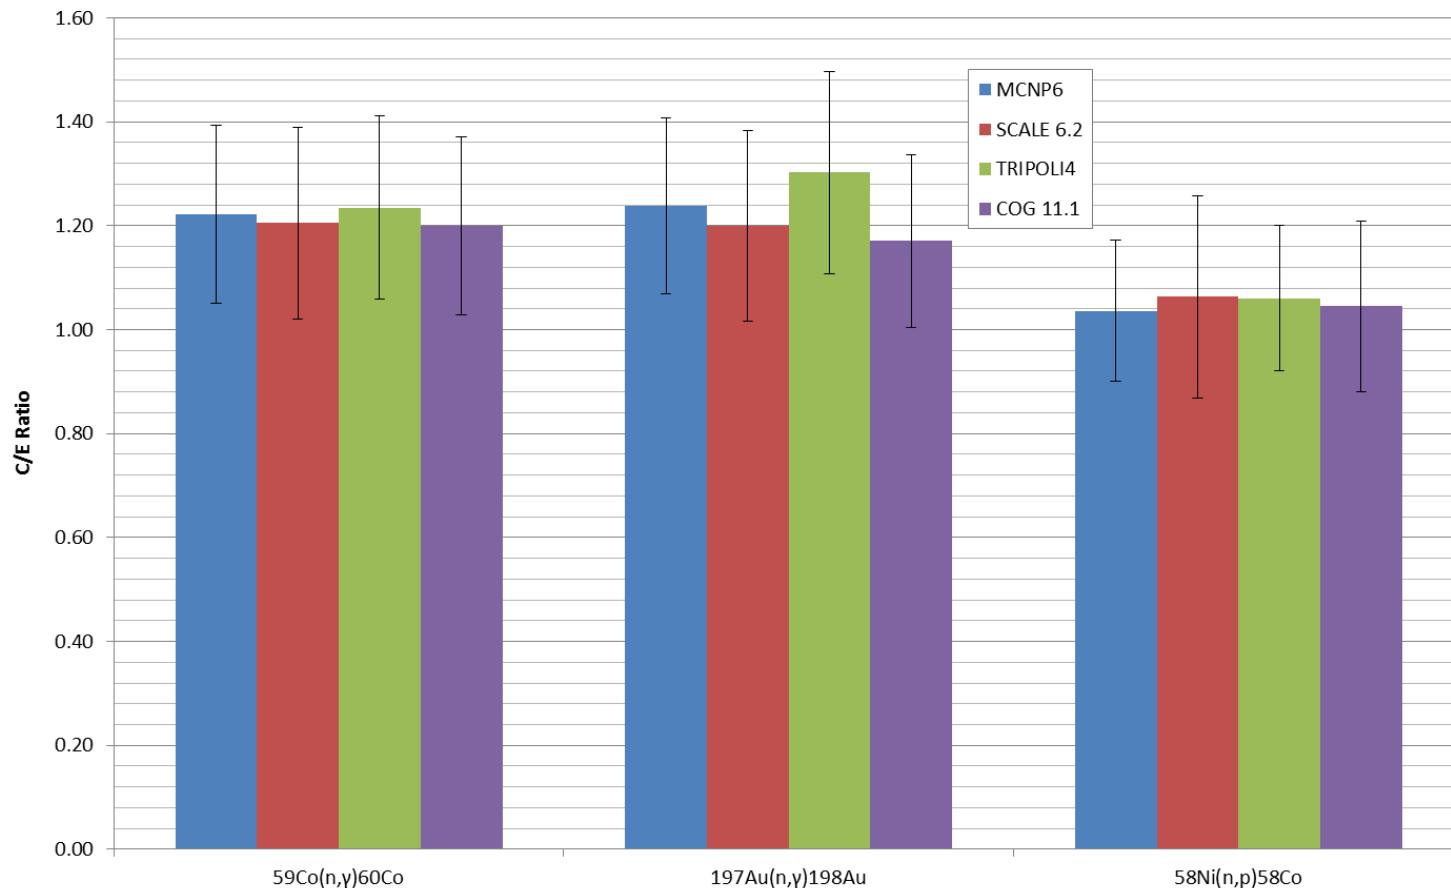


Fig. E-7. Case 7 scattering box position 4 neutron activation foil code-to-code comparison of C/E ratios with 2-sigma error bars.

ALARM-TRAN-AIR-SHIELD-001

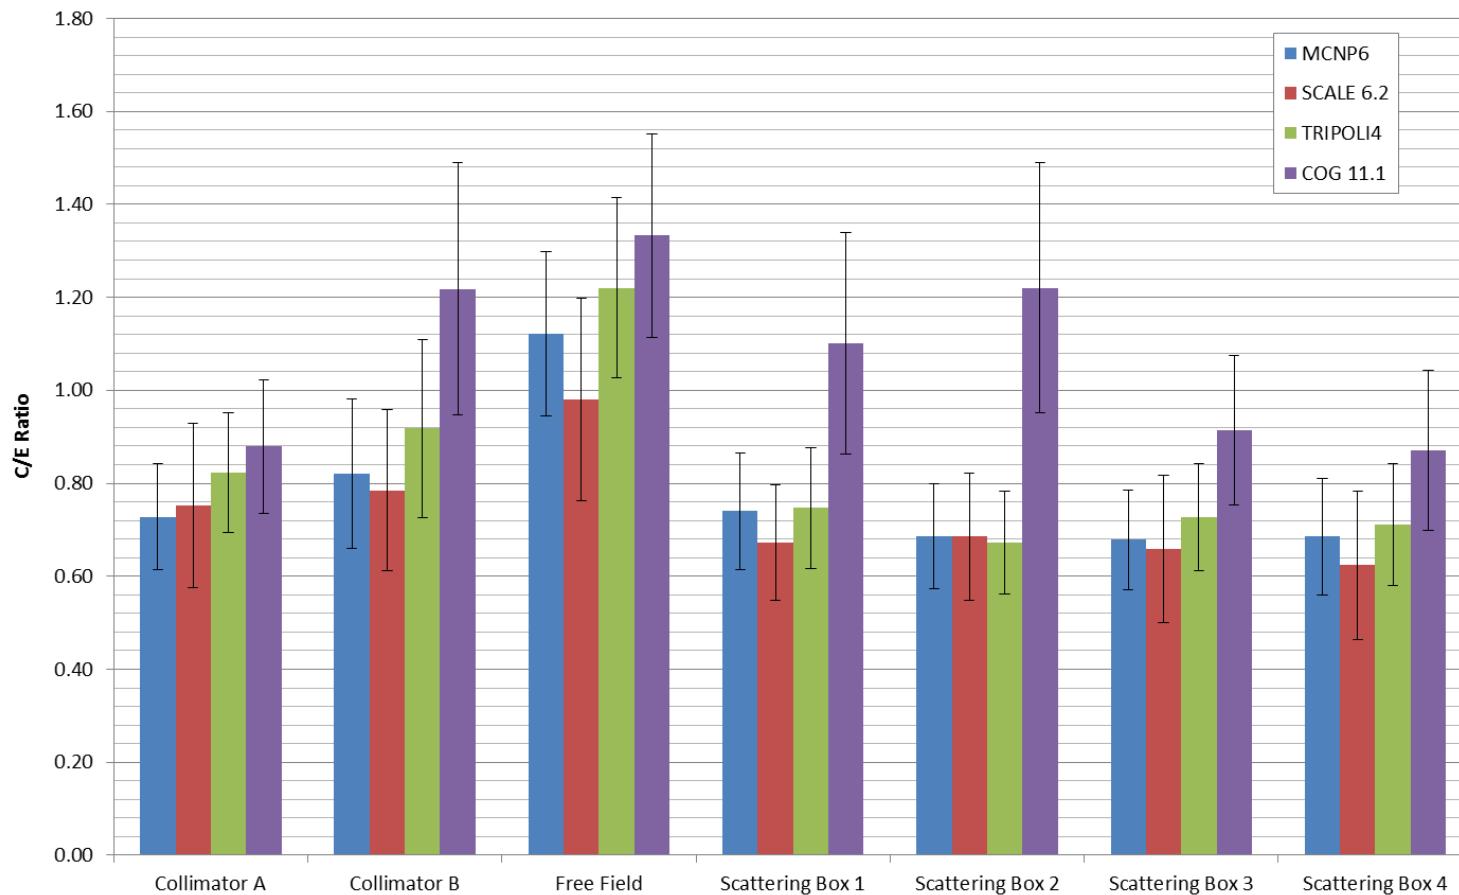


Fig. E-8. All Al₂O₃ TLD code-to-code comparison of C/E ratios with 2-sigma error bars (all cases).

ALARM-TRAN-AIR-SHIELD-001

APPENDIX F: LEAKAGE RESULTS FROM SIMULATION

F.1 Neutron and Photon Leakage from Fuel Solution

The leakage of neutrons and photons from the SILENE fuel solution were tallied in the first calculation of the MCNP two-step computational sequence using cross sections based on ENDF/B-VII.1 data. The neutron and photon leakage are plotted in Figs. F-1 and F-2, respectively. The numerical values of these plots, along with the relative errors, follow in Tables F-1 and F-2.

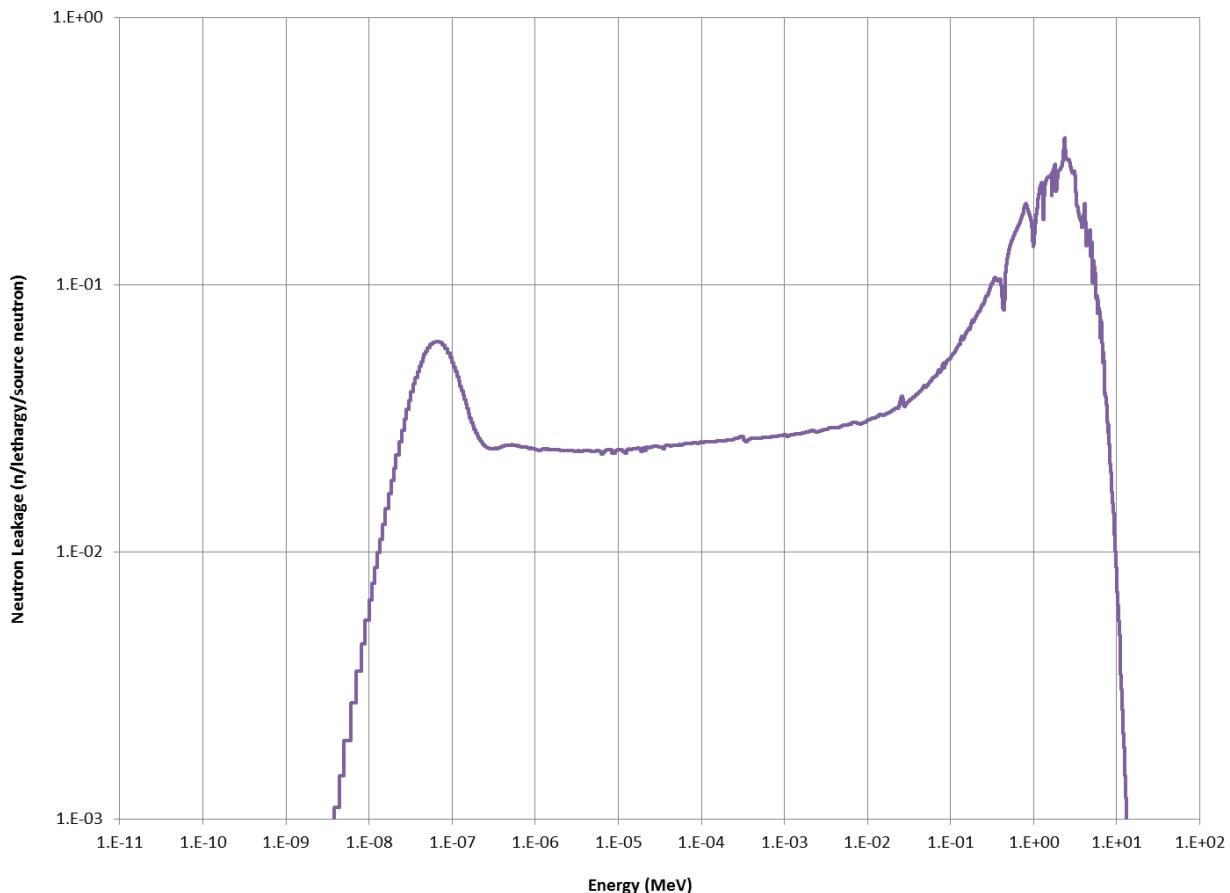


Fig. F-1. Neutron leakage from SILENE fuel solution calculated with MCNP6 using ENDF/B-VII.1 cross section data (.80c).

ALARM-TRAN-AIR-SHIELD-001

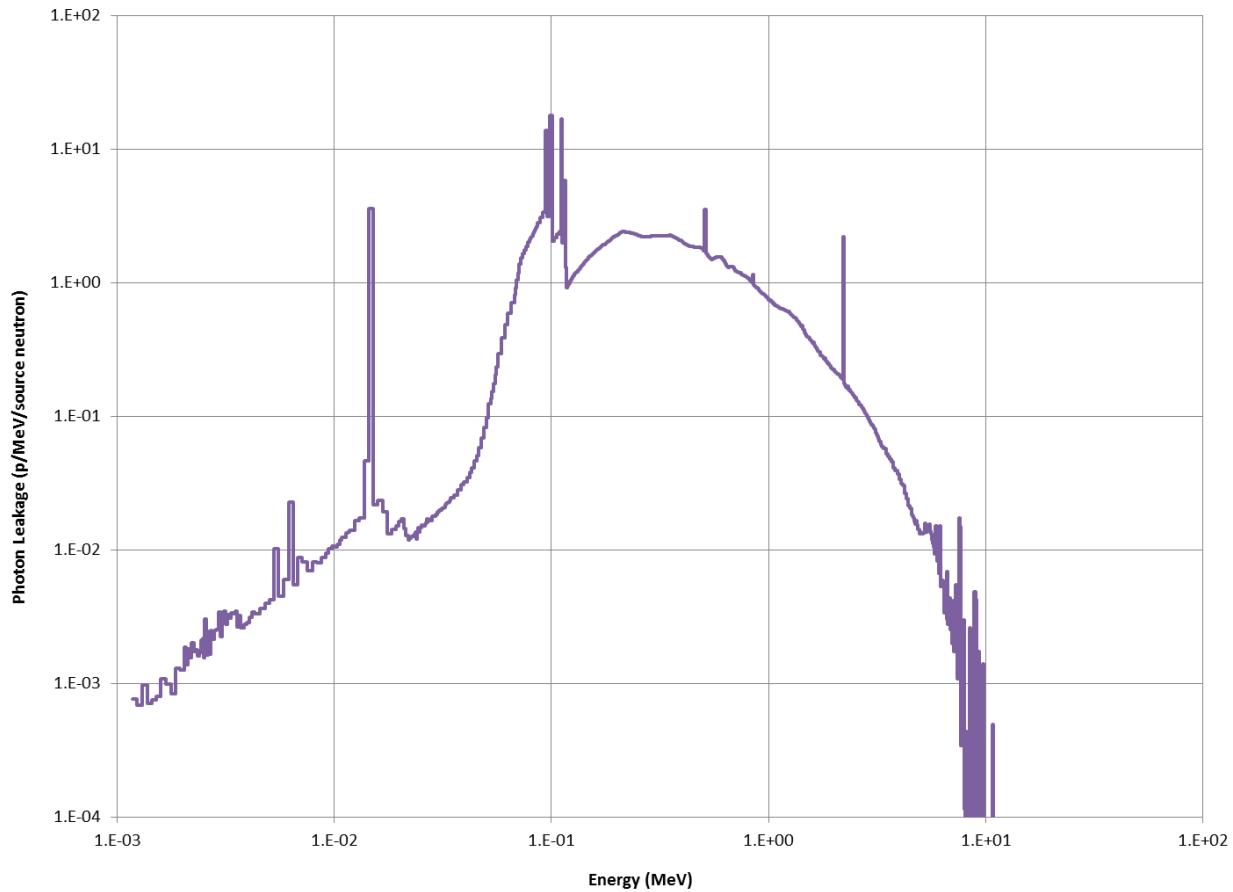


Fig. F-2. Photon leakage from SILENE fuel solution calculated with MCNP6 using ENDF/B-VII.1 neutron cross section data (.80c and .04p).

Table F-1. Neutron leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
2.8000E+01	8.2159E-10	0.7086	8.4610E-01	8.4291E-04	0.0008	3.4957E-03	2.5683E-04	0.0014
2.6000E+01	6.9011E-09	0.2806	8.3769E-01	8.6267E-04	0.0008	3.4252E-03	2.6146E-04	0.0014
2.4000E+01	3.2572E-08	0.1255	8.2927E-01	8.7790E-04	0.0008	3.3546E-03	2.4107E-04	0.0014
2.2000E+01	1.9115E-07	0.0524	8.2085E-01	8.4942E-04	0.0008	3.2908E-03	2.4493E-04	0.0014
2.0000E+01	1.4279E-08	0.1901	8.1284E-01	8.6065E-04	0.0008	3.2269E-03	2.4947E-04	0.0014
1.9928E+01	1.6037E-08	0.1798	8.0484E-01	8.7061E-04	0.0008	3.1631E-03	2.5510E-04	0.0014
1.9856E+01	1.1431E-08	0.2072	7.9683E-01	8.7152E-04	0.0008	3.0992E-03	2.5866E-04	0.0014
1.9784E+01	1.1913E-08	0.2031	7.8883E-01	8.7618E-04	0.0008	3.0354E-03	2.3926E-04	0.0014
1.9712E+01	1.9268E-08	0.1492	7.8082E-01	8.2867E-04	0.0008	2.9776E-03	2.4334E-04	0.0014
1.9640E+01	1.2185E-07	0.0641	7.7320E-01	8.2834E-04	0.0008	2.9198E-03	2.4723E-04	0.0014
1.9178E+01	1.9935E-07	0.0508	7.6559E-01	8.2566E-04	0.0008	2.8621E-03	2.5247E-04	0.0014
1.8717E+01	2.7246E-07	0.0431	7.5797E-01	8.1690E-04	0.0008	2.8043E-03	2.5718E-04	0.0014
1.8255E+01	3.9348E-07	0.0356	7.5036E-01	8.1703E-04	0.0008	2.7465E-03	1.2065E-04	0.0020
1.7794E+01	5.5989E-07	0.0299	7.4274E-01	7.8157E-04	0.0008	2.7197E-03	1.2201E-04	0.0020
1.7332E+01	1.1116E-07	0.0670	7.3549E-01	7.8008E-04	0.0008	2.6929E-03	1.2263E-04	0.0020
1.7247E+01	1.5766E-07	0.0572	7.2825E-01	7.7545E-04	0.0008	2.6662E-03	1.2371E-04	0.0020

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table F-1. Neutron leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
1.7161E+01	1.3780E-07	0.0601	7.2100E-01	7.7837E-04	0.0008	2.6394E-03	1.2530E-04	0.0020
1.7076E+01	1.6740E-07	0.0570	7.1376E-01	7.8742E-04	0.0008	2.6126E-03	1.2020E-04	0.0020
1.6990E+01	1.5751E-07	0.0574	7.0651E-01	7.5343E-04	0.0008	2.5871E-03	1.2153E-04	0.0020
1.6905E+01	1.8756E-07	0.0519	6.9962E-01	7.4709E-04	0.0008	2.5616E-03	1.2206E-04	0.0020
1.6821E+01	1.9447E-07	0.0514	6.9273E-01	7.5093E-04	0.0008	2.5362E-03	1.2349E-04	0.0020
1.6738E+01	1.9206E-07	0.0510	6.8584E-01	7.4797E-04	0.0008	2.5107E-03	1.2469E-04	0.0020
1.6654E+01	2.0117E-07	0.0501	6.7895E-01	7.4968E-04	0.0008	2.4852E-03	2.3427E-04	0.0015
1.6571E+01	2.3215E-07	0.0465	6.7206E-01	7.1984E-04	0.0008	2.4379E-03	2.3903E-04	0.0014
1.6487E+01	4.6075E-07	0.0335	6.6550E-01	7.2119E-04	0.0008	2.3906E-03	2.4415E-04	0.0014
1.6326E+01	5.3732E-07	0.0306	6.5895E-01	7.2170E-04	0.0008	2.3433E-03	2.5050E-04	0.0014
1.6165E+01	6.1109E-07	0.0289	6.5239E-01	7.2469E-04	0.0008	2.2960E-03	2.5590E-04	0.0014
1.6005E+01	7.0671E-07	0.0269	6.4584E-01	7.3183E-04	0.0008	2.2487E-03	2.3702E-04	0.0014
1.5844E+01	7.8196E-07	0.0257	6.3928E-01	6.9715E-04	0.0009	2.2059E-03	2.4146E-04	0.0014
1.5683E+01	7.7329E-07	0.0253	6.3304E-01	6.9964E-04	0.0009	2.1631E-03	2.4679E-04	0.0014
1.5530E+01	8.9578E-07	0.0238	6.2681E-01	7.0295E-04	0.0009	2.1203E-03	2.5162E-04	0.0014
1.5377E+01	1.0192E-06	0.0222	6.2057E-01	6.9859E-04	0.0009	2.0775E-03	2.5640E-04	0.0014
1.5224E+01	1.0984E-06	0.0213	6.1434E-01	7.0592E-04	0.0008	2.0347E-03	5.5518E-04	0.0010
1.5071E+01	1.2357E-06	0.0201	6.0810E-01	6.7522E-04	0.0009	1.9447E-03	5.7861E-04	0.0009
1.4918E+01	6.3384E-07	0.0284	6.0217E-01	6.7530E-04	0.0009	1.8547E-03	6.0672E-04	0.0009
1.4844E+01	6.9629E-07	0.0268	5.9624E-01	6.7740E-04	0.0009	1.7646E-03	6.3519E-04	0.0009
1.4771E+01	7.6698E-07	0.0255	5.9030E-01	6.7750E-04	0.0009	1.6746E-03	6.6709E-04	0.0009
1.4697E+01	7.7783E-07	0.0255	5.8437E-01	6.7525E-04	0.0009	1.5846E-03	5.4465E-04	0.0010
1.4624E+01	8.3740E-07	0.0244	5.7844E-01	6.4373E-04	0.0009	1.5145E-03	5.6931E-04	0.0009
1.4550E+01	8.8870E-07	0.0238	5.7280E-01	6.4728E-04	0.0009	1.4444E-03	5.9605E-04	0.0009
1.4478E+01	8.9976E-07	0.0236	5.6716E-01	6.4714E-04	0.0009	1.3743E-03	6.2617E-04	0.0009
1.4406E+01	9.8529E-07	0.0227	5.6151E-01	6.4970E-04	0.0009	1.3042E-03	6.6027E-04	0.0009
1.4335E+01	1.0627E-06	0.0216	5.5587E-01	6.5311E-04	0.0009	1.2341E-03	5.3941E-04	0.0010
1.4263E+01	1.0922E-06	0.0213	5.5023E-01	6.2176E-04	0.0009	1.1795E-03	5.6036E-04	0.0009
1.4191E+01	1.0914E-06	0.0214	5.4486E-01	6.2271E-04	0.0009	1.1249E-03	5.8247E-04	0.0009
1.4121E+01	1.1729E-06	0.0205	5.3950E-01	6.2442E-04	0.0009	1.0703E-03	6.2477E-04	0.0009
1.4051E+01	1.3159E-06	0.0197	5.3413E-01	6.2670E-04	0.0009	1.0157E-03	6.5640E-04	0.0009
1.3980E+01	1.3366E-06	0.0193	5.2877E-01	6.2708E-04	0.0009	9.6112E-04	5.3529E-04	0.0010
1.3910E+01	1.3788E-06	0.0190	5.2340E-01	5.9739E-04	0.0009	9.1860E-04	5.6104E-04	0.0009
1.3840E+01	1.4060E-06	0.0189	5.1829E-01	5.9547E-04	0.0009	8.7608E-04	5.8664E-04	0.0009
1.3772E+01	1.5087E-06	0.0182	5.1319E-01	5.9673E-04	0.0009	8.3356E-04	6.1487E-04	0.0009
1.3704E+01	1.5883E-06	0.0178	5.0808E-01	5.9472E-04	0.0009	7.9104E-04	6.4872E-04	0.0009
1.3635E+01	1.6951E-06	0.0172	5.0298E-01	5.9540E-04	0.0009	7.4852E-04	5.3032E-04	0.0010
1.3567E+01	1.7224E-06	0.0170	4.9787E-01	1.0931E-03	0.0007	7.1541E-04	5.5513E-04	0.0010
1.3499E+01	3.6004E-06	0.0118	4.8839E-01	1.0724E-03	0.0007	6.8229E-04	5.8110E-04	0.0009
1.3367E+01	4.0472E-06	0.0111	4.7892E-01	1.0374E-03	0.0007	6.4918E-04	6.1092E-04	0.0009
1.3235E+01	4.4177E-06	0.0107	4.6944E-01	9.8646E-04	0.0007	6.1606E-04	6.4425E-04	0.0009
1.3104E+01	4.8686E-06	0.0101	4.5997E-01	9.0301E-04	0.0008	5.8295E-04	5.2664E-04	0.0010
1.2972E+01	5.3499E-06	0.0097	4.5049E-01	7.3191E-04	0.0008	5.5716E-04	5.5158E-04	0.0010
1.2840E+01	2.7773E-06	0.0134	4.4192E-01	6.8382E-04	0.0009	5.3137E-04	5.7660E-04	0.0009
1.2777E+01	2.9553E-06	0.0130	4.3334E-01	7.0750E-04	0.0008	5.0558E-04	6.0573E-04	0.0009
1.2713E+01	3.1060E-06	0.0126	4.2477E-01	7.9892E-04	0.0008	4.7979E-04	6.3919E-04	0.0009
1.2650E+01	3.2077E-06	0.0125	4.1619E-01	8.9525E-04	0.0008	4.5400E-04	5.2164E-04	0.0010
1.2586E+01	3.3398E-06	0.0123	4.0762E-01	4.4083E-04	0.0011	4.3391E-04	5.4638E-04	0.0010
1.2523E+01	3.4352E-06	0.0121	4.0364E-01	4.4785E-04	0.0011	4.1383E-04	5.7280E-04	0.0009
1.2461E+01	3.6638E-06	0.0117	3.9967E-01	4.5643E-04	0.0011	3.9374E-04	6.0039E-04	0.0009
1.2399E+01	3.6393E-06	0.0117	3.9569E-01	4.5907E-04	0.0011	3.7366E-04	6.2795E-04	0.0009
1.2338E+01	4.0520E-06	0.0111	3.9172E-01	4.6403E-04	0.0010	3.5357E-04	5.0530E-04	0.0010
1.2276E+01	4.1949E-06	0.0109	3.8774E-01	4.4061E-04	0.0011	3.3793E-04	5.3970E-04	0.0010

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table F-1. Neutron leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
1.2214E+01	8.5689E-06	0.0076	3.8396E-01	4.4599E-04	0.0011	3.2229E-04	5.8484E-04	0.0009
1.2095E+01	8.9836E-06	0.0075	3.8018E-01	4.5316E-04	0.0011	3.0664E-04	6.1547E-04	0.0009
1.1976E+01	9.7847E-06	0.0071	3.7639E-01	4.5788E-04	0.0011	2.9100E-04	6.4402E-04	0.0009
1.1856E+01	1.0735E-05	0.0068	3.7261E-01	4.5884E-04	0.0011	2.7536E-04	5.2230E-04	0.0010
1.1737E+01	1.1368E-05	0.0066	3.6883E-01	8.6104E-04	0.0008	2.6318E-04	5.4619E-04	0.0010
1.1618E+01	1.1584E-05	0.0065	3.6181E-01	8.9330E-04	0.0008	2.5100E-04	5.7201E-04	0.0009
1.1505E+01	1.3021E-05	0.0062	3.5479E-01	9.1880E-04	0.0007	2.3881E-04	5.9781E-04	0.0009
1.1392E+01	1.4100E-05	0.0059	3.4777E-01	9.4130E-04	0.0007	2.2663E-04	6.2795E-04	0.0009
1.1278E+01	1.5201E-05	0.0057	3.4075E-01	9.5167E-04	0.0007	2.1445E-04	5.1336E-04	0.0010
1.1165E+01	1.6897E-05	0.0055	3.3373E-01	8.6339E-04	0.0008	2.0496E-04	5.3733E-04	0.0010
1.1052E+01	1.8207E-05	0.0052	3.2738E-01	8.6711E-04	0.0008	1.9548E-04	5.6324E-04	0.0009
1.0944E+01	2.0963E-05	0.0049	3.2103E-01	8.7842E-04	0.0008	1.8599E-04	5.9119E-04	0.0009
1.0836E+01	2.2451E-05	0.0047	3.1467E-01	8.9256E-04	0.0008	1.7651E-04	6.2506E-04	0.0009
1.0729E+01	2.4112E-05	0.0046	3.0832E-01	8.9425E-04	0.0008	1.6702E-04	5.1022E-04	0.0010
1.0621E+01	2.5768E-05	0.0044	3.0197E-01	9.9155E-05	0.0023	1.5963E-04	5.3343E-04	0.0010
1.0513E+01	2.5823E-05	0.0044	3.0127E-01	9.7555E-05	0.0023	1.5224E-04	5.5908E-04	0.0009
1.0410E+01	2.6924E-05	0.0043	3.0058E-01	9.8441E-05	0.0023	1.4485E-04	5.8853E-04	0.0009
1.0308E+01	2.8796E-05	0.0042	2.9988E-01	9.7399E-05	0.0023	1.3746E-04	6.1870E-04	0.0009
1.0205E+01	3.0916E-05	0.0040	2.9919E-01	9.9054E-05	0.0023	1.3007E-04	5.0516E-04	0.0010
1.0103E+01	3.4270E-05	0.0038	2.9849E-01	3.6836E-05	0.0037	1.2432E-04	5.3078E-04	0.0010
1.0000E+01	3.5304E-05	0.0038	2.9823E-01	3.5084E-05	0.0038	1.1856E-04	5.5524E-04	0.0009
9.9025E+00	3.7632E-05	0.0037	2.9798E-01	3.6623E-05	0.0037	1.1281E-04	5.8602E-04	0.0009
9.8049E+00	4.0237E-05	0.0035	2.9772E-01	3.5150E-05	0.0038	1.0705E-04	6.1388E-04	0.0009
9.7074E+00	4.4090E-05	0.0034	2.9747E-01	3.6753E-05	0.0037	1.0130E-04	5.0537E-04	0.0010
9.6098E+00	4.7922E-05	0.0032	2.9721E-01	7.6124E-05	0.0026	9.6819E-05	5.2630E-04	0.0010
9.5123E+00	4.9101E-05	0.0032	2.9667E-01	7.6446E-05	0.0026	9.2337E-05	5.5063E-04	0.0010
9.4195E+00	5.2649E-05	0.0031	2.9613E-01	7.4928E-05	0.0026	8.7856E-05	5.8091E-04	0.0009
9.3267E+00	5.8091E-05	0.0029	2.9560E-01	7.6065E-05	0.0026	8.3374E-05	6.1234E-04	0.0009
9.2340E+00	6.1337E-05	0.0029	2.9506E-01	7.6349E-05	0.0026	7.8893E-05	5.0104E-04	0.0010
9.1412E+00	6.2866E-05	0.0028	2.9452E-01	2.0354E-04	0.0016	7.5403E-05	5.2303E-04	0.0010
9.0484E+00	6.4649E-05	0.0028	2.9307E-01	2.0569E-04	0.0016	7.1913E-05	5.4842E-04	0.0010
8.9601E+00	7.0397E-05	0.0027	2.9161E-01	2.0451E-04	0.0016	6.8422E-05	5.7766E-04	0.0009
8.8719E+00	7.1047E-05	0.0027	2.9016E-01	2.0625E-04	0.0016	6.4932E-05	6.0850E-04	0.0009
8.7836E+00	7.3620E-05	0.0026	2.8870E-01	2.0474E-04	0.0016	6.1442E-05	4.9729E-04	0.0010
8.6954E+00	8.1550E-05	0.0025	2.8725E-01	3.9554E-04	0.0011	5.8724E-05	5.1557E-04	0.0010
8.6071E+00	8.4429E-05	0.0025	2.8445E-01	3.9655E-04	0.0011	5.6006E-05	5.4347E-04	0.0010
8.5231E+00	8.7569E-05	0.0024	2.8165E-01	3.9823E-04	0.0011	5.3287E-05	5.6862E-04	0.0009
8.4392E+00	9.0061E-05	0.0024	2.7884E-01	3.9694E-04	0.0011	5.0569E-05	6.0100E-04	0.0009
8.3552E+00	9.3536E-05	0.0023	2.7604E-01	4.0616E-04	0.0011	4.7851E-05	4.9339E-04	0.0010
8.2713E+00	9.9988E-05	0.0023	2.7324E-01	7.5959E-04	0.0008	4.5734E-05	5.1545E-04	0.0010
8.1873E+00	1.0741E-04	0.0022	2.6804E-01	7.6052E-04	0.0008	4.3617E-05	5.3879E-04	0.0010
8.1074E+00	1.2285E-04	0.0020	2.6284E-01	7.6220E-04	0.0008	4.1500E-05	5.6786E-04	0.0009
8.0276E+00	1.2955E-04	0.0020	2.5764E-01	7.6593E-04	0.0008	3.9383E-05	6.0119E-04	0.0009
7.9477E+00	1.2217E-04	0.0020	2.5244E-01	7.6881E-04	0.0008	3.7266E-05	4.8662E-04	0.0010
7.8679E+00	1.2461E-04	0.0020	2.4724E-01	3.5769E-04	0.0012	3.5617E-05	4.9796E-04	0.0010
7.7880E+00	1.2980E-04	0.0020	2.4483E-01	3.6395E-04	0.0012	3.3969E-05	5.3374E-04	0.0010
7.7120E+00	1.4246E-04	0.0019	2.4242E-01	3.6431E-04	0.0012	3.2320E-05	5.6095E-04	0.0009
7.6361E+00	1.5448E-04	0.0018	2.4000E-01	3.6488E-04	0.0012	3.0672E-05	5.9620E-04	0.0009
7.5601E+00	1.6160E-04	0.0018	2.3759E-01	3.6578E-04	0.0012	2.9023E-05	4.8674E-04	0.0010
7.4842E+00	1.6597E-04	0.0018	2.3518E-01	3.4867E-04	0.0012	2.7739E-05	5.0969E-04	0.0010
7.4082E+00	1.6233E-04	0.0018	2.3289E-01	3.5150E-04	0.0012	2.6455E-05	5.3294E-04	0.0010
7.3359E+00	1.6916E-04	0.0017	2.3059E-01	3.5246E-04	0.0012	2.5171E-05	5.5897E-04	0.0009
7.2637E+00	1.6906E-04	0.0017	2.2830E-01	3.5435E-04	0.0012	2.3887E-05	5.8567E-04	0.0009

ALARM-TRAN-AIR-SHIELD-001

Table F-1. Neutron leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
7.1914E+00	1.9962E-04	0.0016	2.2600E-01	3.5312E-04	0.0012	2.2603E-05	4.8475E-04	0.0010
7.1192E+00	2.1588E-04	0.0015	2.2371E-01	3.3758E-04	0.0012	2.1603E-05	4.9341E-04	0.0010
7.0469E+00	2.2026E-04	0.0015	2.2153E-01	3.4015E-04	0.0012	2.0603E-05	5.2983E-04	0.0010
6.9782E+00	2.3689E-04	0.0015	2.1935E-01	3.4704E-04	0.0012	1.9604E-05	5.3904E-04	0.0010
6.9094E+00	2.4175E-04	0.0015	2.1716E-01	3.4575E-04	0.0012	1.8604E-05	5.8463E-04	0.0009
6.8407E+00	2.2376E-04	0.0015	2.1498E-01	3.4695E-04	0.0012	1.7604E-05	4.8136E-04	0.0010
6.7719E+00	2.5738E-04	0.0014	2.1280E-01	3.3354E-04	0.0012	1.6825E-05	4.9997E-04	0.0010
6.7032E+00	8.6782E-05	0.0024	2.1072E-01	3.3292E-04	0.0012	1.6046E-05	5.2480E-04	0.0010
6.6810E+00	8.6727E-05	0.0024	2.0865E-01	3.3495E-04	0.0012	1.5268E-05	5.5448E-04	0.0009
6.6589E+00	8.9784E-05	0.0024	2.0657E-01	3.3539E-04	0.0012	1.4489E-05	5.8044E-04	0.0009
6.6367E+00	9.1696E-05	0.0024	2.0450E-01	3.3879E-04	0.0012	1.3710E-05	4.7745E-04	0.0010
6.6146E+00	9.3969E-05	0.0023	2.0242E-01	3.2247E-04	0.0013	1.3103E-05	4.9651E-04	0.0010
6.5924E+00	1.9328E-04	0.0016	2.0045E-01	3.2545E-04	0.0012	1.2497E-05	5.0712E-04	0.0010
6.5492E+00	2.0763E-04	0.0016	1.9847E-01	3.2447E-04	0.0012	1.1890E-05	5.3890E-04	0.0010
6.5060E+00	2.1503E-04	0.0015	1.9650E-01	3.2680E-04	0.0012	1.1284E-05	5.8006E-04	0.0009
6.4627E+00	2.0662E-04	0.0016	1.9452E-01	3.2604E-04	0.0012	1.0677E-05	4.7278E-04	0.0010
6.4195E+00	1.8556E-04	0.0017	1.9255E-01	3.1166E-04	0.0013	1.0205E-05	4.9699E-04	0.0010
6.3763E+00	3.1130E-04	0.0013	1.9067E-01	3.1200E-04	0.0013	9.7323E-06	5.1716E-04	0.0010
6.3141E+00	3.3413E-04	0.0012	1.8879E-01	3.1342E-04	0.0013	9.2600E-06	5.3187E-04	0.0010
6.2519E+00	3.4372E-04	0.0012	1.8692E-01	3.2313E-04	0.0013	8.7876E-06	5.5941E-04	0.0009
6.1897E+00	3.5743E-04	0.0012	1.8504E-01	3.2748E-04	0.0012	8.3153E-06	4.7311E-04	0.0010
6.1275E+00	3.5880E-04	0.0012	1.8316E-01	3.1311E-04	0.0013	7.9474E-06	4.9466E-04	0.0010
6.0653E+00	3.4785E-04	0.0012	1.8137E-01	3.1214E-04	0.0013	7.5796E-06	5.1987E-04	0.0010
6.0061E+00	3.7527E-04	0.0012	1.7958E-01	3.1143E-04	0.0013	7.2117E-06	5.4222E-04	0.0010
5.9470E+00	3.3819E-04	0.0012	1.7780E-01	3.1300E-04	0.0013	6.8439E-06	5.6484E-04	0.0009
5.8878E+00	3.9765E-04	0.0011	1.7601E-01	3.1147E-04	0.0013	6.4760E-06	4.5479E-04	0.0010
5.8287E+00	4.0150E-04	0.0011	1.7422E-01	2.9575E-04	0.0013	6.1895E-06	4.9042E-04	0.0010
5.7695E+00	3.8206E-04	0.0012	1.7252E-01	2.9747E-04	0.0013	5.9030E-06	5.1715E-04	0.0010
5.7132E+00	3.7715E-04	0.0012	1.7082E-01	2.9379E-04	0.0013	5.6165E-06	5.4303E-04	0.0010
5.6569E+00	3.8655E-04	0.0011	1.6913E-01	3.0365E-04	0.0013	5.3300E-06	5.7025E-04	0.0009
5.6007E+00	4.3643E-04	0.0011	1.6743E-01	3.0481E-04	0.0013	5.0435E-06	4.6594E-04	0.0010
5.5444E+00	4.8882E-04	0.0010	1.6573E-01	2.9136E-04	0.0013	4.8204E-06	4.8917E-04	0.0010
5.4881E+00	4.8980E-04	0.0010	1.6411E-01	2.9266E-04	0.0013	4.5973E-06	5.1744E-04	0.0010
5.4346E+00	5.0064E-04	0.0010	1.6249E-01	2.9196E-04	0.0013	4.3741E-06	5.4561E-04	0.0010
5.3811E+00	4.9093E-04	0.0010	1.6088E-01	2.9514E-04	0.0013	4.1510E-06	5.7450E-04	0.0009
5.3275E+00	5.3115E-04	0.0010	1.5926E-01	2.9670E-04	0.0013	3.9279E-06	4.7064E-04	0.0010
5.2740E+00	5.4313E-04	0.0010	1.5764E-01	2.8405E-04	0.0013	3.7541E-06	4.8765E-04	0.0010
5.2205E+00	5.2003E-04	0.0010	1.5610E-01	2.8332E-04	0.0013	3.5803E-06	5.1417E-04	0.0010
5.1696E+00	4.3517E-04	0.0011	1.5457E-01	2.8625E-04	0.0013	3.4066E-06	5.4243E-04	0.0010
5.1187E+00	5.1950E-04	0.0010	1.5303E-01	2.8606E-04	0.0013	3.2328E-06	5.7142E-04	0.0009
5.0677E+00	5.9304E-04	0.0009	1.5150E-01	2.8884E-04	0.0013	3.0590E-06	4.6806E-04	0.0010
5.0168E+00	6.3757E-04	0.0009	1.4996E-01	2.7395E-04	0.0014	2.9237E-06	4.9201E-04	0.0010
4.9659E+00	6.0871E-04	0.0009	1.4850E-01	2.7746E-04	0.0013	2.7884E-06	5.1744E-04	0.0010
4.9175E+00	5.9244E-04	0.0009	1.4703E-01	2.7580E-04	0.0014	2.6530E-06	5.4474E-04	0.0010
4.8690E+00	5.5486E-04	0.0010	1.4557E-01	2.7868E-04	0.0013	2.5177E-06	5.7469E-04	0.0009
4.8206E+00	6.8753E-04	0.0009	1.4410E-01	2.7675E-04	0.0013	2.3824E-06	4.7174E-04	0.0010
4.7721E+00	7.1148E-04	0.0008	1.4264E-01	2.6369E-04	0.0014	2.2770E-06	4.9384E-04	0.0010
4.7237E+00	6.7561E-04	0.0009	1.4125E-01	2.6598E-04	0.0014	2.1716E-06	5.1725E-04	0.0010
4.6776E+00	6.4173E-04	0.0009	1.3986E-01	2.7429E-04	0.0014	2.0662E-06	5.4239E-04	0.0010
4.6315E+00	6.5934E-04	0.0009	1.3847E-01	2.7989E-04	0.0013	1.9608E-06	5.7627E-04	0.0009
4.5855E+00	6.5297E-04	0.0009	1.3708E-01	2.8270E-04	0.0013	1.8554E-06	4.7210E-04	0.0010
4.5394E+00	6.7136E-04	0.0009	1.3569E-01	2.6884E-04	0.0014	1.7733E-06	4.9669E-04	0.0010
4.4933E+00	1.2643E-03	0.0006	1.3437E-01	2.7034E-04	0.0014	1.6912E-06	5.2043E-04	0.0010

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table F-1. Neutron leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
4.4078E+00	1.1879E-03	0.0007	1.3304E-01	2.6690E-04	0.0014	1.6092E-06	5.4873E-04	0.0010
4.3223E+00	1.4932E-03	0.0006	1.3172E-01	2.6622E-04	0.0014	1.5271E-06	5.7987E-04	0.0009
4.2367E+00	1.4735E-03	0.0006	1.3039E-01	2.6390E-04	0.0014	1.4450E-06	2.1307E-04	0.0015
4.1512E+00	1.8184E-03	0.0005	1.2907E-01	2.5682E-04	0.0014	1.4160E-06	2.1750E-04	0.0015
4.0657E+00	1.5284E-03	0.0006	1.2781E-01	2.5714E-04	0.0014	1.3870E-06	2.2088E-04	0.0015
3.9883E+00	1.5204E-03	0.0006	1.2655E-01	2.5865E-04	0.0014	1.3580E-06	2.2738E-04	0.0015
3.9109E+00	1.5575E-03	0.0006	1.2529E-01	2.5831E-04	0.0014	1.3290E-06	2.3223E-04	0.0015
3.8336E+00	1.4461E-03	0.0006	1.2403E-01	2.6085E-04	0.0014	1.3000E-06	2.8606E-04	0.0013
3.7562E+00	1.5653E-03	0.0006	1.2277E-01	2.4856E-04	0.0014	1.2651E-06	2.9500E-04	0.0013
3.6788E+00	1.4577E-03	0.0006	1.2157E-01	2.4895E-04	0.0014	1.2301E-06	3.0147E-04	0.0013
3.6088E+00	1.5314E-03	0.0006	1.2038E-01	2.5158E-04	0.0014	1.1952E-06	3.1087E-04	0.0013
3.5388E+00	1.6161E-03	0.0006	1.1918E-01	2.5168E-04	0.0014	1.1602E-06	3.1764E-04	0.0012
3.4687E+00	1.6743E-03	0.0006	1.1799E-01	2.5489E-04	0.0014	1.1253E-06	8.4282E-05	0.0024
3.3987E+00	1.7622E-03	0.0005	1.1679E-01	2.4355E-04	0.0014	1.1162E-06	8.4093E-05	0.0024
3.3287E+00	8.4517E-04	0.0008	1.1565E-01	2.4476E-04	0.0014	1.1072E-06	8.5874E-05	0.0024
3.2962E+00	8.7934E-04	0.0008	1.1451E-01	2.4591E-04	0.0014	1.0981E-06	8.5781E-05	0.0024
3.2638E+00	9.3583E-04	0.0007	1.1337E-01	2.4680E-04	0.0014	1.0891E-06	8.7271E-05	0.0024
3.2313E+00	9.7130E-04	0.0007	1.1223E-01	2.4818E-04	0.0014	1.0800E-06	7.8010E-05	0.0025
3.1989E+00	1.0862E-03	0.0007	1.1109E-01	5.7278E-04	0.0009	1.0720E-06	7.8300E-05	0.0025
3.1664E+00	1.0916E-03	0.0007	1.0848E-01	5.8416E-04	0.0009	1.0640E-06	7.8835E-05	0.0025
3.1355E+00	1.1322E-03	0.0007	1.0587E-01	5.9158E-04	0.0009	1.0560E-06	7.9325E-05	0.0025
3.1046E+00	1.1527E-03	0.0007	1.0326E-01	5.9791E-04	0.0009	1.0480E-06	8.0158E-05	0.0025
3.0737E+00	1.1668E-03	0.0007	1.0065E-01	6.0682E-04	0.0009	1.0400E-06	8.0974E-05	0.0025
3.0428E+00	1.1721E-03	0.0007	9.8037E-02	5.4405E-04	0.0010	1.0320E-06	8.1610E-05	0.0024
3.0119E+00	1.1194E-03	0.0007	9.5733E-02	5.5715E-04	0.0010	1.0240E-06	8.1873E-05	0.0024
2.9825E+00	1.1212E-03	0.0007	9.3429E-02	5.6801E-04	0.0009	1.0160E-06	8.2815E-05	0.0024
2.9532E+00	1.1423E-03	0.0007	9.1125E-02	5.7422E-04	0.0009	1.0080E-06	8.3301E-05	0.0024
2.9238E+00	1.1578E-03	0.0007	8.8821E-02	5.7956E-04	0.0009	1.0000E-06	2.6398E-04	0.0014
2.8945E+00	1.1610E-03	0.0007	8.6517E-02	2.0365E-04	0.0016	9.7529E-07	2.7081E-04	0.0013
2.8651E+00	1.1406E-03	0.0007	8.5714E-02	2.0383E-04	0.0016	9.5057E-07	2.7743E-04	0.0013
2.8371E+00	1.1662E-03	0.0007	8.4911E-02	2.0266E-04	0.0016	9.2586E-07	2.8563E-04	0.0013
2.8092E+00	1.1986E-03	0.0007	8.4109E-02	2.0388E-04	0.0016	9.0114E-07	2.9531E-04	0.0013
2.7812E+00	1.2283E-03	0.0006	8.3306E-02	2.1223E-04	0.0015	8.7643E-07	1.8621E-04	0.0016
2.7533E+00	1.2611E-03	0.0006	8.2503E-02	1.6245E-04	0.0018	8.6114E-07	1.8951E-04	0.0016
2.7253E+00	1.2223E-03	0.0006	8.1902E-02	1.6251E-04	0.0018	8.4586E-07	1.9360E-04	0.0016
2.6987E+00	1.2485E-03	0.0006	8.1301E-02	1.6211E-04	0.0018	8.3057E-07	1.9699E-04	0.0016
2.6721E+00	1.2669E-03	0.0006	8.0701E-02	1.6339E-04	0.0018	8.1529E-07	2.0126E-04	0.0016
2.6456E+00	1.2888E-03	0.0006	8.0100E-02	1.6339E-04	0.0018	8.0000E-07	3.1820E-04	0.0012
2.6190E+00	1.3038E-03	0.0006	7.9499E-02	4.0780E-04	0.0011	7.7651E-07	3.2786E-04	0.0012
2.5924E+00	1.2520E-03	0.0006	7.7999E-02	4.0639E-04	0.0011	7.5302E-07	3.3838E-04	0.0012
2.5671E+00	1.2611E-03	0.0006	7.6499E-02	4.1124E-04	0.0011	7.2954E-07	3.5163E-04	0.0012
2.5418E+00	1.2713E-03	0.0006	7.4998E-02	4.1166E-04	0.0011	7.0605E-07	3.6346E-04	0.0012
2.5166E+00	1.2913E-03	0.0006	7.3498E-02	4.2867E-04	0.0011	6.8256E-07	1.8187E-04	0.0016
2.4913E+00	1.3168E-03	0.0006	7.1998E-02	2.6714E-04	0.0014	6.7106E-07	1.8580E-04	0.0016
2.4660E+00	8.5894E-04	0.0008	7.1074E-02	2.6909E-04	0.0014	6.5956E-07	1.9007E-04	0.0016
2.4498E+00	8.7244E-04	0.0008	7.0150E-02	2.6984E-04	0.0014	6.4806E-07	1.9355E-04	0.0016
2.4337E+00	9.0567E-04	0.0008	6.9227E-02	2.7055E-04	0.0014	6.3656E-07	1.9792E-04	0.0016
2.4175E+00	9.2774E-04	0.0007	6.8303E-02	2.7256E-04	0.0014	6.2506E-07	3.2777E-04	0.0012
2.4014E+00	9.7022E-04	0.0007	6.7379E-02	6.4530E-04	0.0009	6.0636E-07	3.3948E-04	0.0012
2.3852E+00	2.4521E-04	0.0014	6.5216E-02	6.6012E-04	0.0009	5.8767E-07	3.5179E-04	0.0012
2.3812E+00	2.4856E-04	0.0014	6.3052E-02	6.8000E-04	0.0009	5.6897E-07	3.6273E-04	0.0012
2.3772E+00	2.4532E-04	0.0014	6.0889E-02	6.9693E-04	0.0009	5.5028E-07	3.7505E-04	0.0011
2.3733E+00	2.5397E-04	0.0014	5.8725E-02	7.0813E-04	0.0008	5.3158E-07	1.3061E-04	0.0019

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table F-1. Neutron leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
2.3693E+00	2.5536E-04	0.0014	5.6562E-02	2.7263E-04	0.0014	5.2526E-07	1.3209E-04	0.0019
2.3653E+00	2.5111E-04	0.0014	5.5745E-02	2.7554E-04	0.0014	5.1895E-07	1.3360E-04	0.0019
2.3614E+00	2.5263E-04	0.0014	5.4927E-02	2.7696E-04	0.0013	5.1263E-07	1.3512E-04	0.0019
2.3575E+00	2.6096E-04	0.0014	5.4110E-02	2.8042E-04	0.0013	5.0632E-07	1.3667E-04	0.0019
2.3535E+00	2.5329E-04	0.0014	5.3292E-02	2.8143E-04	0.0013	5.0000E-07	3.8059E-04	0.0011
2.3496E+00	2.5233E-04	0.0014	5.2475E-02	4.3166E-04	0.0011	4.8280E-07	3.9498E-04	0.0011
2.3457E+00	5.0351E-04	0.0010	5.1242E-02	4.3789E-04	0.0011	4.6560E-07	4.0960E-04	0.0011
2.3379E+00	4.9313E-04	0.0010	5.0009E-02	4.5353E-04	0.0011	4.4839E-07	4.2426E-04	0.0011
2.3302E+00	4.9350E-04	0.0010	4.8775E-02	4.6521E-04	0.0010	4.3119E-07	4.4029E-04	0.0011
2.3224E+00	4.8064E-04	0.0010	4.7542E-02	4.7166E-04	0.0010	4.1399E-07	2.4826E-04	0.0014
2.3147E+00	4.7839E-04	0.0010	4.6309E-02	4.2011E-04	0.0011	4.0455E-07	2.5388E-04	0.0014
2.3069E+00	9.0643E-04	0.0008	4.5221E-02	4.2620E-04	0.0011	3.9511E-07	2.5954E-04	0.0014
2.2918E+00	8.8195E-04	0.0008	4.4133E-02	4.3427E-04	0.0011	3.8568E-07	2.6480E-04	0.0014
2.2767E+00	8.7046E-04	0.0008	4.3044E-02	4.4206E-04	0.0011	3.7624E-07	2.7070E-04	0.0013
2.2615E+00	8.5443E-04	0.0008	4.1956E-02	4.4968E-04	0.0011	3.6680E-07	2.4561E-04	0.0014
2.2464E+00	8.4703E-04	0.0008	4.0868E-02	5.5558E-04	0.0010	3.5844E-07	2.5031E-04	0.0014
2.2313E+00	1.2147E-03	0.0006	3.9556E-02	5.6963E-04	0.0009	3.5008E-07	2.5536E-04	0.0014
2.2095E+00	1.2058E-03	0.0007	3.8244E-02	5.8270E-04	0.0009	3.4172E-07	2.6168E-04	0.0014
2.1878E+00	1.2136E-03	0.0006	3.6931E-02	5.9794E-04	0.0009	3.3336E-07	2.6901E-04	0.0013
2.1660E+00	1.2112E-03	0.0006	3.5619E-02	6.1430E-04	0.0009	3.2500E-07	3.3001E-04	0.0012
2.1443E+00	1.2188E-03	0.0006	3.4307E-02	2.3742E-04	0.0015	3.1500E-07	3.4061E-04	0.0012
2.1225E+00	1.1608E-03	0.0007	3.3811E-02	2.4016E-04	0.0014	3.0500E-07	3.5151E-04	0.0012
2.1018E+00	1.1650E-03	0.0007	3.3315E-02	2.4177E-04	0.0014	2.9500E-07	3.6319E-04	0.0012
2.0811E+00	1.1698E-03	0.0007	3.2820E-02	2.4547E-04	0.0014	2.8500E-07	3.7869E-04	0.0011
2.0604E+00	1.1780E-03	0.0007	3.2324E-02	2.4811E-04	0.0014	2.7500E-07	3.9352E-04	0.0011
2.0397E+00	1.1833E-03	0.0007	3.1828E-02	3.3634E-04	0.0012	2.6500E-07	4.1154E-04	0.0011
2.0190E+00	1.1341E-03	0.0007	3.1163E-02	3.4275E-04	0.0012	2.5500E-07	4.3176E-04	0.0011
1.9993E+00	1.1396E-03	0.0007	3.0497E-02	3.4699E-04	0.0012	2.4500E-07	4.5574E-04	0.0010
1.9796E+00	1.1430E-03	0.0007	2.9832E-02	3.5113E-04	0.0012	2.3500E-07	4.8370E-04	0.0010
1.9599E+00	1.1403E-03	0.0007	2.9166E-02	3.5495E-04	0.0012	2.2500E-07	4.1930E-04	0.0011
1.9402E+00	1.1132E-03	0.0007	2.8501E-02	1.6144E-04	0.0018	2.1680E-07	4.4474E-04	0.0010
1.9205E+00	9.6175E-04	0.0007	2.8201E-02	1.6258E-04	0.0017	2.0860E-07	4.7379E-04	0.0010
1.9018E+00	1.0320E-03	0.0007	2.7901E-02	1.6541E-04	0.0017	2.0040E-07	5.0502E-04	0.0010
1.8830E+00	1.1351E-03	0.0007	2.7600E-02	1.6846E-04	0.0017	1.9220E-07	5.4379E-04	0.0009
1.8643E+00	1.1469E-03	0.0007	2.7300E-02	1.7351E-04	0.0017	1.8400E-07	4.8376E-04	0.0010
1.8455E+00	9.8724E-04	0.0007	2.7000E-02	1.1170E-04	0.0021	1.7720E-07	5.1858E-04	0.0009
1.8268E+00	1.2030E-03	0.0007	2.6812E-02	1.1453E-04	0.0021	1.7040E-07	5.5857E-04	0.0009
1.8090E+00	1.2007E-03	0.0007	2.6623E-02	1.1675E-04	0.0021	1.6360E-07	6.0557E-04	0.0009
1.7912E+00	1.1959E-03	0.0007	2.6435E-02	1.1876E-04	0.0020	1.5680E-07	6.6108E-04	0.0008
1.7733E+00	1.1912E-03	0.0007	2.6246E-02	1.1887E-04	0.0020	1.5000E-07	5.2658E-04	0.0009
1.7555E+00	1.1940E-03	0.0007	2.6058E-02	1.6223E-04	0.0018	1.4500E-07	5.6492E-04	0.0009
1.7377E+00	1.1361E-03	0.0007	2.5804E-02	1.6290E-04	0.0018	1.4000E-07	6.0843E-04	0.0009
1.7208E+00	1.1444E-03	0.0007	2.5550E-02	1.6310E-04	0.0018	1.3500E-07	6.5670E-04	0.0008
1.7038E+00	1.1348E-03	0.0007	2.5296E-02	1.6187E-04	0.0018	1.3000E-07	7.1099E-04	0.0008
1.6869E+00	1.1542E-03	0.0007	2.5042E-02	1.6155E-04	0.0018	1.2500E-07	7.6914E-04	0.0008
1.6699E+00	1.0845E-03	0.0007	2.4788E-02	7.7439E-05	0.0026	1.2000E-07	8.3780E-04	0.0007
1.6530E+00	9.1195E-04	0.0007	2.4666E-02	7.7881E-05	0.0025	1.1500E-07	9.0986E-04	0.0007
1.6369E+00	1.1091E-03	0.0007	2.4543E-02	7.7490E-05	0.0026	1.1000E-07	9.9226E-04	0.0007
1.6208E+00	1.1135E-03	0.0007	2.4421E-02	7.8119E-05	0.0025	1.0500E-07	1.0832E-03	0.0006
1.6046E+00	1.1050E-03	0.0007	2.4298E-02	7.7650E-05	0.0025	1.0000E-07	1.4331E-03	0.0006
1.5885E+00	1.1258E-03	0.0007	2.4176E-02	7.5882E-05	0.0026	9.4000E-08	1.5900E-03	0.0005
1.5724E+00	1.0773E-03	0.0007	2.4057E-02	7.6463E-05	0.0026	8.8000E-08	1.7661E-03	0.0005
1.5571E+00	1.0928E-03	0.0007	2.3937E-02	7.6106E-05	0.0026	8.2000E-08	1.9559E-03	0.0005

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table F-1. Neutron leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
1.5417E+00	1.0986E-03	0.0007	2.3818E-02	7.6462E-05	0.0026	7.6000E-08	2.1615E-03	0.0004
1.5264E+00	1.1181E-03	0.0007	2.3698E-02	7.5978E-05	0.0026	7.0000E-08	1.5620E-03	0.0005
1.5110E+00	1.1230E-03	0.0007	2.3579E-02	2.2044E-04	0.0015	6.6000E-08	1.6594E-03	0.0005
1.4957E+00	1.0777E-03	0.0007	2.3238E-02	2.2116E-04	0.0015	6.2000E-08	1.7570E-03	0.0005
1.4811E+00	1.0864E-03	0.0007	2.2897E-02	2.2525E-04	0.0015	5.8000E-08	1.8496E-03	0.0005
1.4665E+00	1.0948E-03	0.0007	2.2557E-02	2.2844E-04	0.0015	5.4000E-08	1.9390E-03	0.0005
1.4519E+00	1.1012E-03	0.0007	2.2216E-02	2.3132E-04	0.0015	5.0000E-08	9.9941E-04	0.0006
1.4373E+00	1.1031E-03	0.0007	2.1875E-02	3.5435E-04	0.0012	4.8000E-08	1.0163E-03	0.0006
1.4227E+00	1.0452E-03	0.0007	2.1361E-02	3.6159E-04	0.0012	4.6000E-08	1.0286E-03	0.0006
1.4088E+00	1.0436E-03	0.0007	2.0847E-02	3.6843E-04	0.0012	4.4000E-08	1.0421E-03	0.0006
1.3950E+00	1.0477E-03	0.0007	2.0333E-02	3.7650E-04	0.0012	4.2000E-08	1.0511E-03	0.0006
1.3811E+00	1.0370E-03	0.0007	1.9819E-02	3.8360E-04	0.0011	4.0000E-08	1.0556E-03	0.0006
1.3673E+00	1.0164E-03	0.0007	1.9305E-02	6.5576E-04	0.0009	3.8000E-08	1.0568E-03	0.0006
1.3534E+00	9.1886E-04	0.0007	1.8451E-02	6.8194E-04	0.0009	3.6000E-08	1.0546E-03	0.0006
1.3402E+00	8.4636E-04	0.0008	1.7597E-02	7.1039E-04	0.0008	3.4000E-08	1.0473E-03	0.0006
1.3270E+00	7.5929E-04	0.0008	1.6742E-02	7.4042E-04	0.0008	3.2000E-08	1.0358E-03	0.0006
1.3138E+00	7.6898E-04	0.0008	1.5888E-02	7.7511E-04	0.0008	3.0000E-08	9.1734E-04	0.0007
1.3006E+00	9.0426E-04	0.0008	1.5034E-02	6.4168E-04	0.0009	2.8200E-08	8.9978E-04	0.0007
1.2874E+00	9.7418E-04	0.0007	1.4369E-02	6.7049E-04	0.0009	2.6400E-08	8.7651E-04	0.0007
1.2748E+00	1.0232E-03	0.0007	1.3704E-02	6.9299E-04	0.0009	2.4600E-08	8.5135E-04	0.0007
1.2623E+00	1.0508E-03	0.0007	1.3039E-02	7.2330E-04	0.0008	2.2800E-08	8.2045E-04	0.0007
1.2497E+00	1.0543E-03	0.0007	1.2374E-02	7.6118E-04	0.0008	2.1000E-08	5.6915E-04	0.0008
1.2372E+00	1.0551E-03	0.0007	1.1709E-02	2.6486E-04	0.0014	1.9700E-08	5.4815E-04	0.0009
1.2246E+00	1.0096E-03	0.0007	1.1486E-02	2.6905E-04	0.0014	1.8400E-08	5.2557E-04	0.0009
1.2126E+00	9.9522E-04	0.0007	1.1263E-02	2.7222E-04	0.0014	1.7100E-08	5.0001E-04	0.0009
1.2007E+00	1.0046E-03	0.0007	1.1041E-02	2.7815E-04	0.0013	1.5800E-08	4.7234E-04	0.0009
1.1887E+00	9.8701E-04	0.0007	1.0818E-02	2.8331E-04	0.0013	1.4500E-08	3.0967E-04	0.0011
1.1768E+00	9.9439E-04	0.0007	1.0595E-02	3.8271E-04	0.0011	1.3600E-08	2.9550E-04	0.0012
1.1648E+00	9.3350E-04	0.0007	1.0300E-02	3.9225E-04	0.0011	1.2700E-08	2.7995E-04	0.0012
1.1534E+00	9.1710E-04	0.0007	1.0005E-02	4.0339E-04	0.0011	1.1800E-08	2.6336E-04	0.0012
1.1421E+00	9.1790E-04	0.0007	9.7093E-03	4.1289E-04	0.0011	1.0900E-08	2.4733E-04	0.0013
1.1307E+00	8.8778E-04	0.0008	9.4140E-03	4.2334E-04	0.0011	1.0000E-08	2.5346E-04	0.0012
1.1194E+00	8.8901E-04	0.0008	9.1188E-03	5.9832E-04	0.0009	9.0000E-09	2.3074E-04	0.0013
1.1080E+00	1.6176E-03	0.0006	8.7154E-03	6.2294E-04	0.0009	8.0000E-09	2.0685E-04	0.0014
1.0869E+00	1.5586E-03	0.0006	8.3120E-03	6.5101E-04	0.0009	7.0000E-09	1.8214E-04	0.0015
1.0658E+00	1.4728E-03	0.0006	7.9085E-03	6.8602E-04	0.0009	6.0000E-09	1.5530E-04	0.0016
1.0448E+00	1.3805E-03	0.0006	7.5051E-03	7.3033E-04	0.0008	5.0000E-09	8.0323E-05	0.0022
1.0237E+00	1.2876E-03	0.0006	7.1017E-03	5.9926E-04	0.0009	4.4000E-09	7.0401E-05	0.0023
1.0026E+00	4.9426E-04	0.0010	6.7875E-03	6.2661E-04	0.0009	3.8000E-09	6.0206E-05	0.0025
9.9441E-01	5.0228E-04	0.0010	6.4733E-03	6.5030E-04	0.0009	3.2000E-09	5.0141E-05	0.0028
9.8622E-01	5.2420E-04	0.0010	6.1592E-03	6.8532E-04	0.0009	2.6000E-09	3.9801E-05	0.0031
9.7802E-01	5.4792E-04	0.0010	5.8450E-03	7.1383E-04	0.0008	2.0000E-09	1.5792E-05	0.0049
9.6983E-01	5.7497E-04	0.0009	5.5308E-03	5.8678E-04	0.0009	1.7000E-09	1.3428E-05	0.0053
9.6164E-01	8.0986E-04	0.0008	5.2861E-03	6.1248E-04	0.0009	1.4000E-09	1.0629E-05	0.0060
9.5075E-01	8.4916E-04	0.0008	5.0414E-03	6.3769E-04	0.0009	1.1000E-09	8.0551E-06	0.0069
9.3986E-01	8.8062E-04	0.0008	4.7968E-03	6.6612E-04	0.0009	8.0000E-10	5.3716E-06	0.0084
9.2896E-01	9.0422E-04	0.0008	4.5521E-03	7.0132E-04	0.0008	5.0000E-10	9.5579E-07	0.0199
9.1807E-01	9.2664E-04	0.0007	4.3074E-03	3.5796E-04	0.0012	4.2000E-10	8.1612E-07	0.0215
9.0718E-01	7.6769E-04	0.0008	4.1874E-03	3.6815E-04	0.0012	3.4000E-10	6.2687E-07	0.0246
8.9833E-01	7.8394E-04	0.0008	4.0674E-03	3.7823E-04	0.0011	2.6000E-10	4.4041E-07	0.0289
8.8948E-01	7.9693E-04	0.0008	3.9474E-03	3.9008E-04	0.0011	1.8000E-10	2.7144E-07	0.0374
8.8064E-01	8.1381E-04	0.0008	3.8274E-03	4.0334E-04	0.0011	1.0000E-10	1.0890E-07	0.0582
8.7179E-01	8.2949E-04	0.0008	3.7074E-03	2.4375E-04	0.0014	0.0000E+00		

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table F-1. Neutron leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
8.6294E-01	8.1281E-04	0.0008	3.6368E-03	2.4685E-04	0.0014	(minimum energy)		
8.5452E-01	8.2852E-04	0.0008	3.5663E-03	2.5209E-04	0.0014			

Table F-2. Photon leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
3.0000E+01	0.0000E+00	0.0000	2.2918E+00	2.5041E-03	0.0008	1.7958E-01	3.5199E-03	0.0007
2.8000E+01	0.0000E+00	0.0000	2.2767E+00	2.5936E-03	0.0008	1.7780E-01	3.4947E-03	0.0007
2.6000E+01	0.0000E+00	0.0000	2.2615E+00	2.5617E-03	0.0008	1.7601E-01	3.4565E-03	0.0007
2.4000E+01	0.0000E+00	0.0000	2.2464E+00	2.6622E-03	0.0008	1.7422E-01	3.2522E-03	0.0007
2.2000E+01	4.3917E-10	1.0000	2.2313E+00	4.7958E-02	0.0001	1.7252E-01	3.2246E-03	0.0007
2.0000E+01	0.0000E+00	0.0000	2.2095E+00	4.1184E-03	0.0006	1.7082E-01	3.1532E-03	0.0007
1.9928E+01	1.3012E-09	0.7449	2.1878E+00	4.2138E-03	0.0006	1.6913E-01	3.1300E-03	0.0007
1.9856E+01	0.0000E+00	0.0000	2.1660E+00	4.2413E-03	0.0006	1.6743E-01	3.0916E-03	0.0007
1.9784E+01	0.0000E+00	0.0000	2.1443E+00	4.3774E-03	0.0006	1.6573E-01	2.9090E-03	0.0007
1.9712E+01	0.0000E+00	0.0000	2.1225E+00	4.2438E-03	0.0006	1.6411E-01	2.8715E-03	0.0007
1.9640E+01	4.3738E-10	1.0000	2.1018E+00	4.2629E-03	0.0006	1.6249E-01	2.8169E-03	0.0007
1.9178E+01	8.7441E-10	1.0000	2.0811E+00	4.3131E-03	0.0006	1.6088E-01	2.7899E-03	0.0008
1.8717E+01	4.3507E-10	1.0000	2.0604E+00	4.3562E-03	0.0006	1.5926E-01	2.7521E-03	0.0008
1.8255E+01	0.0000E+00	0.0000	2.0397E+00	4.4286E-03	0.0006	1.5764E-01	2.5722E-03	0.0008
1.7794E+01	1.3165E-09	0.5774	2.0190E+00	4.2874E-03	0.0006	1.5610E-01	2.5215E-03	0.0008
1.7332E+01	0.0000E+00	0.0000	1.9993E+00	4.3746E-03	0.0006	1.5457E-01	2.4968E-03	0.0008
1.7247E+01	8.6947E-10	1.0000	1.9796E+00	4.4678E-03	0.0006	1.5303E-01	2.4466E-03	0.0008
1.7161E+01	0.0000E+00	0.0000	1.9599E+00	4.5660E-03	0.0006	1.5150E-01	2.4186E-03	0.0008
1.7076E+01	6.6133E-10	1.0000	1.9402E+00	4.6547E-03	0.0006	1.4996E-01	2.2572E-03	0.0008
1.6990E+01	0.0000E+00	0.0000	1.9205E+00	4.5045E-03	0.0006	1.4850E-01	2.2308E-03	0.0008
1.6905E+01	8.6986E-10	0.7071	1.9018E+00	4.6983E-03	0.0006	1.4703E-01	2.1806E-03	0.0008
1.6821E+01	4.4001E-10	1.0000	1.8830E+00	4.6872E-03	0.0006	1.4557E-01	2.1539E-03	0.0009
1.6738E+01	1.3125E-09	0.7460	1.8643E+00	4.8156E-03	0.0006	1.4410E-01	2.1032E-03	0.0009
1.6654E+01	0.0000E+00	0.0000	1.8455E+00	4.8713E-03	0.0006	1.4264E-01	1.9638E-03	0.0009
1.6571E+01	0.0000E+00	0.0000	1.8268E+00	4.8298E-03	0.0006	1.4125E-01	1.9290E-03	0.0009
1.6487E+01	1.3029E-09	0.5774	1.8090E+00	4.8028E-03	0.0006	1.3986E-01	1.8923E-03	0.0009
1.6326E+01	4.3592E-10	1.0000	1.7912E+00	4.9825E-03	0.0006	1.3847E-01	1.8595E-03	0.0009
1.6165E+01	2.1809E-09	0.4472	1.7733E+00	4.9859E-03	0.0006	1.3708E-01	1.8233E-03	0.0009
1.6005E+01	0.0000E+00	0.0000	1.7555E+00	5.0654E-03	0.0006	1.3569E-01	1.6970E-03	0.0010
1.5844E+01	1.3063E-09	0.7450	1.7377E+00	5.1285E-03	0.0006	1.3437E-01	1.6749E-03	0.0010
1.5683E+01	1.7643E-09	0.5000	1.7208E+00	5.1211E-03	0.0006	1.3304E-01	1.6286E-03	0.0010
1.5530E+01	8.7134E-10	0.7071	1.7038E+00	5.2226E-03	0.0006	1.3172E-01	1.6078E-03	0.0010
1.5377E+01	8.7919E-10	0.7071	1.6869E+00	5.4156E-03	0.0005	1.3039E-01	1.5624E-03	0.0010
1.5224E+01	1.3159E-09	0.5774	1.6699E+00	5.4846E-03	0.0005	1.2907E-01	1.4596E-03	0.0010
1.5071E+01	1.8208E-09	0.5004	1.6530E+00	5.3472E-03	0.0006	1.2781E-01	1.4277E-03	0.0010
1.4918E+01	1.3103E-09	0.7459	1.6369E+00	5.4959E-03	0.0005	1.2655E-01	1.4034E-03	0.0010
1.4844E+01	4.3876E-10	1.0000	1.6208E+00	5.7542E-03	0.0005	1.2529E-01	1.3611E-03	0.0011
1.4771E+01	4.3437E-10	1.0000	1.6046E+00	5.7097E-03	0.0005	1.2403E-01	1.3276E-03	0.0011
1.4697E+01	8.8013E-10	0.7071	1.5885E+00	5.8363E-03	0.0005	1.2277E-01	1.2372E-03	0.0011
1.4624E+01	1.7535E-09	0.5000	1.5724E+00	5.6555E-03	0.0005	1.2157E-01	1.1837E-03	0.0011
1.4550E+01	4.3871E-10	1.0000	1.5571E+00	5.8094E-03	0.0005	1.2038E-01	1.1613E-03	0.0012
1.4478E+01	9.1901E-10	0.7076	1.5417E+00	5.9068E-03	0.0005	1.1918E-01	1.1190E-03	0.0012

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table F-2. Photon leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
1.4406E+01	4.3862E-10	1.0000	1.5264E+00	6.0383E-03	0.0005	1.1799E-01	1.0934E-03	0.0012
1.4335E+01	1.7514E-09	0.5000	1.5110E+00	6.1203E-03	0.0005	1.1679E-01	1.4762E-03	0.0010
1.4263E+01	1.7413E-09	0.5000	1.4957E+00	6.0112E-03	0.0005	1.1565E-01	6.6540E-03	0.0005
1.4191E+01	8.7955E-10	0.7071	1.4811E+00	6.1702E-03	0.0005	1.1451E-01	2.2799E-03	0.0008
1.4121E+01	2.8195E-09	0.4676	1.4665E+00	6.4437E-03	0.0005	1.1337E-01	2.2549E-03	0.0008
1.4051E+01	4.3926E-09	0.3999	1.4519E+00	6.5267E-03	0.0005	1.1223E-01	1.9117E-02	0.0003
1.3980E+01	8.7527E-10	0.7071	1.4373E+00	7.0055E-03	0.0005	1.1109E-01	6.3035E-03	0.0005
1.3910E+01	2.6247E-09	0.4083	1.4227E+00	6.5261E-03	0.0005	1.0848E-01	6.0003E-03	0.0005
1.3840E+01	1.7526E-09	0.5000	1.4088E+00	6.6953E-03	0.0005	1.0587E-01	5.6775E-03	0.0005
1.3772E+01	3.1444E-09	0.4258	1.3950E+00	6.8304E-03	0.0005	1.0326E-01	5.3334E-03	0.0005
1.3704E+01	2.2009E-09	0.4472	1.3811E+00	6.9465E-03	0.0005	1.0065E-01	4.6788E-02	0.0002
1.3635E+01	2.6453E-09	0.5270	1.3673E+00	7.1716E-03	0.0005	9.8037E-02	7.1746E-03	0.0005
1.3567E+01	2.2577E-09	0.5269	1.3534E+00	6.9309E-03	0.0005	9.5733E-02	3.1880E-02	0.0002
1.3499E+01	4.9625E-09	0.3022	1.3402E+00	7.1104E-03	0.0005	9.3429E-02	7.7987E-03	0.0004
1.3367E+01	1.0577E-08	0.2355	1.3270E+00	7.1801E-03	0.0005	9.1125E-02	7.0964E-03	0.0005
1.3235E+01	7.6110E-09	0.2564	1.3138E+00	7.3118E-03	0.0005	8.8821E-02	6.4514E-03	0.0005
1.3104E+01	5.7141E-09	0.2978	1.3006E+00	7.4340E-03	0.0005	8.6517E-02	2.1129E-03	0.0009
1.2972E+01	7.0297E-09	0.2929	1.2874E+00	7.2020E-03	0.0005	8.5714E-02	2.0498E-03	0.0009
1.2840E+01	8.7576E-10	0.7071	1.2748E+00	7.2627E-03	0.0005	8.4911E-02	1.9869E-03	0.0009
1.2777E+01	4.6673E-09	0.3480	1.2623E+00	7.4863E-03	0.0005	8.4109E-02	1.9359E-03	0.0009
1.2713E+01	4.3739E-09	0.3735	1.2497E+00	7.6197E-03	0.0005	8.3306E-02	1.8795E-03	0.0009
1.2650E+01	5.6805E-09	0.2774	1.2372E+00	7.6068E-03	0.0005	8.2503E-02	1.3747E-03	0.0011
1.2586E+01	6.5533E-09	0.2905	1.2246E+00	7.3206E-03	0.0005	8.1902E-02	1.3475E-03	0.0011
1.2523E+01	9.1769E-09	0.2562	1.2126E+00	7.3313E-03	0.0005	8.1301E-02	1.3176E-03	0.0011
1.2461E+01	5.2560E-09	0.2887	1.2007E+00	7.4605E-03	0.0005	8.0701E-02	1.2960E-03	0.0011
1.2399E+01	7.6184E-09	0.2694	1.1887E+00	7.4455E-03	0.0005	8.0100E-02	1.2678E-03	0.0011
1.2338E+01	7.8758E-09	0.2605	1.1768E+00	7.5724E-03	0.0005	7.9499E-02	3.0273E-03	0.0007
1.2276E+01	1.8898E-08	0.1692	1.1648E+00	7.2326E-03	0.0005	7.7999E-02	2.8006E-03	0.0007
1.2214E+01	2.7505E-08	0.1394	1.1534E+00	7.2240E-03	0.0005	7.6499E-02	2.6163E-03	0.0008
1.2095E+01	2.8952E-08	0.1367	1.1421E+00	7.3227E-03	0.0005	7.4998E-02	2.4748E-03	0.0008
1.1976E+01	3.6488E-08	0.1149	1.1307E+00	7.3243E-03	0.0005	7.3498E-02	2.2964E-03	0.0008
1.1856E+01	2.7127E-08	0.1330	1.1194E+00	7.4276E-03	0.0005	7.1998E-02	1.2656E-03	0.0011
1.1737E+01	3.4738E-08	0.1293	1.1080E+00	1.3966E-02	0.0003	7.1074E-02	1.1004E-03	0.0012
1.1618E+01	4.3785E-08	0.1114	1.0869E+00	1.4327E-02	0.0003	7.0150E-02	9.7292E-04	0.0013
1.1505E+01	4.7133E-08	0.1061	1.0658E+00	1.4677E-02	0.0003	6.9227E-02	8.4614E-04	0.0014
1.1392E+01	4.9843E-08	0.1029	1.0448E+00	1.5183E-02	0.0003	6.8303E-02	7.5076E-04	0.0014
1.1278E+01	5.2904E-08	0.1027	1.0237E+00	1.5635E-02	0.0003	6.7379E-02	1.5281E-03	0.0010
1.1165E+01	6.6453E-08	0.0923	1.0026E+00	6.1715E-03	0.0005	6.5216E-02	1.2682E-03	0.0011
1.1052E+01	6.3582E-08	0.0916	9.9441E-01	6.2582E-03	0.0005	6.3052E-02	1.0429E-03	0.0012
1.0944E+01	8.6963E-08	0.0765	9.8622E-01	6.3388E-03	0.0005	6.0889E-02	8.3701E-04	0.0014
1.0836E+01	5.2285E-05	0.0032	9.7802E-01	6.4161E-03	0.0005	5.8725E-02	6.3743E-04	0.0016
1.0729E+01	1.8418E-07	0.0545	9.6983E-01	6.5020E-03	0.0005	5.6562E-02	1.9120E-04	0.0028
1.0621E+01	5.1971E-07	0.0318	9.6164E-01	8.7768E-03	0.0004	5.5745E-02	1.6593E-04	0.0031
1.0513E+01	1.8161E-07	0.0537	9.5075E-01	8.9267E-03	0.0004	5.4927E-02	1.4415E-04	0.0033
1.0410E+01	1.8801E-07	0.0537	9.3986E-01	9.1089E-03	0.0004	5.4110E-02	1.2627E-04	0.0035
1.0308E+01	2.5200E-07	0.0466	9.2896E-01	9.2453E-03	0.0004	5.3292E-02	1.1140E-04	0.0037
1.0205E+01	2.2632E-07	0.0488	9.1807E-01	9.3869E-03	0.0004	5.2475E-02	1.5331E-04	0.0031
1.0103E+01	3.1422E-06	0.0134	9.0718E-01	7.7441E-03	0.0005	5.1242E-02	1.1965E-04	0.0036
1.0000E+01	1.1879E-06	0.0209	8.9833E-01	7.9195E-03	0.0005	5.0009E-02	1.0087E-04	0.0039
9.9025E+00	3.0127E-07	0.0422	8.8948E-01	8.0384E-03	0.0005	4.8775E-02	8.4490E-05	0.0043
9.8049E+00	1.3557E-04	0.0021	8.8064E-01	8.2164E-03	0.0004	4.7542E-02	7.2034E-05	0.0046
9.7074E+00	6.4395E-07	0.0294	8.7179E-01	8.3991E-03	0.0004	4.6309E-02	5.5477E-05	0.0053
9.6098E+00	8.0549E-07	0.0259	8.6294E-01	8.1128E-03	0.0004	4.5221E-02	5.0412E-05	0.0055

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table F-2. Photon leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
9.5123E+00	1.1718E-06	0.0217	8.5452E-01	9.6026E-03	0.0004	4.4133E-02	4.4946E-05	0.0058
9.4195E+00	9.4138E-07	0.0241	8.4610E-01	8.4217E-03	0.0004	4.3044E-02	4.1226E-05	0.0061
9.3267E+00	1.6049E-04	0.0018	8.3769E-01	8.8504E-03	0.0004	4.1956E-02	3.8019E-05	0.0063
9.2340E+00	9.2050E-06	0.0076	8.2927E-01	8.7392E-03	0.0004	4.0868E-02	4.2318E-05	0.0060
9.1412E+00	2.9197E-06	0.0134	8.2085E-01	8.4385E-03	0.0004	3.9556E-02	4.0419E-05	0.0061
9.0484E+00	3.7190E-04	0.0012	8.1284E-01	8.5889E-03	0.0004	3.8244E-02	3.6798E-05	0.0064
8.9601E+00	4.2920E-04	0.0012	8.0484E-01	8.7075E-03	0.0004	3.6931E-02	3.3884E-05	0.0067
8.8719E+00	5.9789E-06	0.0095	7.9683E-01	8.7900E-03	0.0004	3.5619E-02	3.1996E-05	0.0069
8.7836E+00	3.0390E-06	0.0135	7.8883E-01	8.9092E-03	0.0004	3.4307E-02	1.1540E-05	0.0115
8.6954E+00	3.9426E-06	0.0118	7.8082E-01	8.5460E-03	0.0004	3.3811E-02	1.1216E-05	0.0116
8.6071E+00	1.7916E-04	0.0017	7.7320E-01	8.6255E-03	0.0004	3.3315E-02	1.1073E-05	0.0118
8.5231E+00	2.1846E-04	0.0018	7.6559E-01	8.7225E-03	0.0004	3.2820E-02	1.0759E-05	0.0119
8.4392E+00	1.5329E-05	0.0061	7.5797E-01	8.7982E-03	0.0004	3.2324E-02	1.0247E-05	0.0123
8.3552E+00	2.0933E-05	0.0051	7.5036E-01	8.9942E-03	0.0004	3.1828E-02	1.3582E-05	0.0106
8.2713E+00	4.4121E-06	0.0113	7.4274E-01	8.5364E-03	0.0004	3.1163E-02	1.3172E-05	0.0108
8.1873E+00	3.4877E-05	0.0039	7.3549E-01	8.5990E-03	0.0004	3.0497E-02	1.2775E-05	0.0109
8.1074E+00	4.5324E-06	0.0124	7.2825E-01	8.6852E-03	0.0004	2.9832E-02	1.2319E-05	0.0111
8.0276E+00	9.1707E-06	0.0100	7.2100E-01	8.7456E-03	0.0004	2.9166E-02	1.1926E-05	0.0113
7.9477E+00	2.3954E-04	0.0015	7.1376E-01	8.8257E-03	0.0004	2.8501E-02	5.3215E-06	0.0169
7.8679E+00	1.0363E-04	0.0026	7.0651E-01	8.4621E-03	0.0004	2.8201E-02	4.9864E-06	0.0174
7.7880E+00	2.6034E-05	0.0073	6.9962E-01	8.6230E-03	0.0004	2.7901E-02	5.1508E-06	0.0172
7.7120E+00	1.1260E-03	0.0007	6.9273E-01	8.9471E-03	0.0004	2.7600E-02	4.9741E-06	0.0175
7.6361E+00	1.3115E-03	0.0007	6.8584E-01	9.0739E-03	0.0004	2.7300E-02	4.9447E-06	0.0177
7.5601E+00	1.1803E-04	0.0031	6.7895E-01	9.0796E-03	0.0004	2.7000E-02	2.9976E-06	0.0225
7.4842E+00	8.2294E-05	0.0043	6.7206E-01	8.6299E-03	0.0004	2.6812E-02	3.2237E-06	0.0215
7.4082E+00	1.7691E-04	0.0025	6.6550E-01	8.5854E-03	0.0004	2.6623E-02	3.0296E-06	0.0225
7.3359E+00	3.9414E-04	0.0014	6.5895E-01	8.5682E-03	0.0004	2.6435E-02	2.9464E-06	0.0226
7.2637E+00	1.5236E-04	0.0029	6.5239E-01	8.5882E-03	0.0004	2.6246E-02	2.8968E-06	0.0226
7.1914E+00	1.2559E-04	0.0035	6.4584E-01	8.8217E-03	0.0004	2.6058E-02	3.8092E-06	0.0200
7.1192E+00	2.9968E-04	0.0018	6.3928E-01	8.6322E-03	0.0004	2.5804E-02	3.8088E-06	0.0200
7.0469E+00	1.3669E-04	0.0034	6.3304E-01	8.8390E-03	0.0004	2.5550E-02	3.8819E-06	0.0200
6.9782E+00	2.5158E-04	0.0021	6.2681E-01	9.0837E-03	0.0004	2.5296E-02	3.7163E-06	0.0203
6.9094E+00	1.7301E-04	0.0029	6.2057E-01	9.2608E-03	0.0004	2.5042E-02	3.7316E-06	0.0201
6.8407E+00	3.0051E-04	0.0019	6.1434E-01	9.4842E-03	0.0004	2.4788E-02	1.7083E-06	0.0300
6.7719E+00	2.0660E-04	0.0026	6.0810E-01	9.1836E-03	0.0004	2.4666E-02	1.6739E-06	0.0298
6.7032E+00	6.1432E-05	0.0051	6.0217E-01	9.2022E-03	0.0004	2.4543E-02	1.6747E-06	0.0305
6.6810E+00	6.0749E-05	0.0052	5.9624E-01	9.2051E-03	0.0004	2.4421E-02	1.7951E-06	0.0296
6.6589E+00	1.5215E-04	0.0026	5.9030E-01	9.1846E-03	0.0004	2.4298E-02	1.7208E-06	0.0301
6.6367E+00	6.8502E-05	0.0048	5.8437E-01	9.1737E-03	0.0004	2.4176E-02	1.6124E-06	0.0306
6.6146E+00	6.7596E-05	0.0049	5.7844E-01	8.7099E-03	0.0004	2.4057E-02	1.4450E-06	0.0319
6.5924E+00	1.5685E-04	0.0030	5.7280E-01	8.6582E-03	0.0004	2.3937E-02	1.6009E-06	0.0305
6.5492E+00	1.6342E-04	0.0030	5.6716E-01	8.6371E-03	0.0004	2.3818E-02	1.6341E-06	0.0305
6.5060E+00	1.4660E-04	0.0033	5.6151E-01	8.5375E-03	0.0004	2.3698E-02	1.5464E-06	0.0315
6.4627E+00	1.6625E-04	0.0031	5.5587E-01	8.4704E-03	0.0004	2.3579E-02	4.4041E-06	0.0185
6.4195E+00	2.3546E-04	0.0024	5.5023E-01	8.0113E-03	0.0005	2.3238E-02	4.2612E-06	0.0189
6.3763E+00	3.6526E-04	0.0019	5.4486E-01	8.0425E-03	0.0005	2.2897E-02	4.2946E-06	0.0189
6.3141E+00	3.3111E-04	0.0021	5.3950E-01	8.2215E-03	0.0004	2.2557E-02	4.1759E-06	0.0190
6.2519E+00	3.2914E-04	0.0022	5.3413E-01	8.3514E-03	0.0004	2.2216E-02	4.0532E-06	0.0193
6.1897E+00	9.4509E-04	0.0010	5.2877E-01	8.5182E-03	0.0004	2.1875E-02	6.5505E-06	0.0152
6.1275E+00	4.1550E-04	0.0019	5.2340E-01	8.2598E-03	0.0004	2.1361E-02	7.4619E-06	0.0143
6.0653E+00	8.0333E-04	0.0012	5.1829E-01	8.4095E-03	0.0004	2.0847E-02	8.7012E-06	0.0132
6.0061E+00	4.8927E-04	0.0018	5.1319E-01	1.7876E-02	0.0003	2.0333E-02	8.3262E-06	0.0135
5.9470E+00	8.8732E-04	0.0011	5.0808E-01	8.8703E-03	0.0004	1.9819E-02	7.7791E-06	0.0140

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table F-2. Photon leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
5.8878E+00	5.4863E-04	0.0017	5.0298E-01	9.0502E-03	0.0004	1.9305E-02	1.2096E-05	0.0112
5.8287E+00	6.2290E-04	0.0016	4.9787E-01	1.7092E-02	0.0003	1.8451E-02	1.1332E-05	0.0116
5.7695E+00	6.2674E-04	0.0016	4.8839E-01	1.7387E-02	0.0003	1.7597E-02	1.6366E-05	0.0097
5.7132E+00	6.7018E-04	0.0016	4.7892E-01	1.7467E-02	0.0003	1.6742E-02	1.9867E-05	0.0088
5.6569E+00	7.4311E-04	0.0015	4.6944E-01	1.7510E-02	0.0003	1.5888E-02	1.8423E-05	0.0091
5.6007E+00	7.7305E-04	0.0014	4.5997E-01	1.7528E-02	0.0003	1.5034E-02	2.3727E-03	0.0008
5.5444E+00	8.7573E-04	0.0013	4.5049E-01	1.5898E-02	0.0003	1.4369E-02	3.0798E-05	0.0071
5.4881E+00	7.5186E-04	0.0015	4.4192E-01	1.6007E-02	0.0003	1.3704E-02	1.1470E-05	0.0116
5.4346E+00	7.4348E-04	0.0015	4.3334E-01	1.6133E-02	0.0003	1.3039E-02	1.0997E-05	0.0116
5.3811E+00	7.3211E-04	0.0015	4.2477E-01	1.6488E-02	0.0003	1.2374E-02	9.3282E-06	0.0128
5.3275E+00	8.1491E-04	0.0014	4.1619E-01	1.6837E-02	0.0003	1.1709E-02	3.0281E-06	0.0225
5.2740E+00	8.4387E-04	0.0013	4.0762E-01	7.9438E-03	0.0005	1.1486E-02	2.9622E-06	0.0226
5.2205E+00	6.7797E-04	0.0016	4.0364E-01	7.9991E-03	0.0005	1.1263E-02	2.7635E-06	0.0235
5.1696E+00	6.7234E-04	0.0016	3.9967E-01	8.1050E-03	0.0004	1.1041E-02	2.7747E-06	0.0234
5.1187E+00	6.8230E-04	0.0015	3.9569E-01	8.1719E-03	0.0004	1.0818E-02	2.6536E-06	0.0239
5.0677E+00	6.8834E-04	0.0015	3.9172E-01	8.2767E-03	0.0004	1.0595E-02	3.2425E-06	0.0218
5.0168E+00	6.6939E-04	0.0016	3.8774E-01	7.9437E-03	0.0005	1.0300E-02	3.1110E-06	0.0219
4.9659E+00	6.9173E-04	0.0015	3.8396E-01	8.0393E-03	0.0004	1.0005E-02	3.1656E-06	0.0219
4.9175E+00	6.9411E-04	0.0015	3.8018E-01	8.1288E-03	0.0004	9.7093E-03	2.9904E-06	0.0226
4.8690E+00	7.3651E-04	0.0015	3.7639E-01	8.1855E-03	0.0004	9.4140E-03	2.7700E-06	0.0235
4.8206E+00	7.9655E-04	0.0014	3.7261E-01	8.2570E-03	0.0004	9.1188E-03	3.5070E-06	0.0207
4.7721E+00	7.5718E-04	0.0015	3.6883E-01	1.5583E-02	0.0003	8.7154E-03	3.2467E-06	0.0215
4.7237E+00	7.4888E-04	0.0015	3.6181E-01	1.5695E-02	0.0003	8.3120E-03	3.2710E-06	0.0215
4.6776E+00	7.9582E-04	0.0014	3.5479E-01	1.5885E-02	0.0003	7.9085E-03	2.8047E-06	0.0233
4.6315E+00	8.2544E-04	0.0014	3.4777E-01	1.5789E-02	0.0003	7.5051E-03	3.2671E-06	0.0212
4.5855E+00	8.4549E-04	0.0014	3.4075E-01	1.5735E-02	0.0003	7.1017E-03	2.7395E-06	0.0229
4.5394E+00	9.4126E-04	0.0013	3.3373E-01	1.4172E-02	0.0003	6.7875E-03	1.7103E-06	0.0293
4.4933E+00	1.8293E-03	0.0009	3.2738E-01	1.4138E-02	0.0003	6.4733E-03	7.0962E-06	0.0140
4.4078E+00	2.0771E-03	0.0009	3.2103E-01	1.4161E-02	0.0003	6.1592E-03	1.8727E-06	0.0280
4.3223E+00	2.2568E-03	0.0009	3.1467E-01	1.4165E-02	0.0003	5.8450E-03	1.4194E-06	0.0314
4.2367E+00	2.5971E-03	0.0008	3.0832E-01	1.4179E-02	0.0003	5.5308E-03	2.5066E-06	0.0236
4.1512E+00	2.6875E-03	0.0008	3.0197E-01	1.5639E-03	0.0010	5.2861E-03	1.0411E-06	0.0373
4.0657E+00	2.6033E-03	0.0008	3.0127E-01	1.5404E-03	0.0010	5.0414E-03	9.7452E-07	0.0382
3.9883E+00	2.8391E-03	0.0008	3.0058E-01	1.5639E-03	0.0010	4.7968E-03	8.8273E-07	0.0398
3.9109E+00	3.0233E-03	0.0007	2.9988E-01	1.5414E-03	0.0010	4.5521E-03	8.1570E-07	0.0412
3.8336E+00	3.1838E-03	0.0007	2.9919E-01	1.5640E-03	0.0010	4.3074E-03	4.1275E-07	0.0579
3.7562E+00	3.5090E-03	0.0007	2.9849E-01	5.8069E-04	0.0017	4.1874E-03	3.7408E-07	0.0607
3.6788E+00	3.3498E-03	0.0007	2.9823E-01	5.5922E-04	0.0017	4.0674E-03	3.4021E-07	0.0645
3.6088E+00	3.5128E-03	0.0007	2.9798E-01	5.8037E-04	0.0017	3.9474E-03	3.3190E-07	0.0640
3.5388E+00	3.6880E-03	0.0007	2.9772E-01	5.5778E-04	0.0017	3.8274E-03	3.1462E-07	0.0655
3.4687E+00	4.0009E-03	0.0006	2.9747E-01	5.8063E-04	0.0017	3.7074E-03	2.2616E-07	0.0782
3.3987E+00	4.1337E-03	0.0006	2.9721E-01	1.2064E-03	0.0012	3.6368E-03	1.8503E-07	0.0869
3.3287E+00	1.9851E-03	0.0009	2.9667E-01	1.2066E-03	0.0012	3.5663E-03	2.4618E-07	0.0742
3.2962E+00	2.0915E-03	0.0009	2.9613E-01	1.1827E-03	0.0012	3.4957E-03	2.3371E-07	0.0772
3.2638E+00	2.1101E-03	0.0009	2.9560E-01	1.2033E-03	0.0012	3.4252E-03	2.3883E-07	0.0774
3.2313E+00	2.1911E-03	0.0009	2.9506E-01	1.2033E-03	0.0012	3.3546E-03	1.9583E-07	0.0837
3.1989E+00	2.3057E-03	0.0008	2.9452E-01	3.2319E-03	0.0007	3.2908E-03	2.0832E-07	0.0793
3.1664E+00	2.2464E-03	0.0009	2.9307E-01	3.2486E-03	0.0007	3.2269E-03	1.7750E-07	0.0898
3.1355E+00	2.3214E-03	0.0008	2.9161E-01	3.2314E-03	0.0007	3.1631E-03	2.2330E-07	0.0810
3.1046E+00	2.4659E-03	0.0008	2.9016E-01	3.2469E-03	0.0007	3.0992E-03	2.1843E-07	0.0817
3.0737E+00	2.4910E-03	0.0008	2.8870E-01	3.2192E-03	0.0007	3.0354E-03	1.2949E-07	0.1019
3.0428E+00	2.5930E-03	0.0008	2.8725E-01	6.2127E-03	0.0005	2.9776E-03	1.9761E-07	0.0824
3.0119E+00	2.5415E-03	0.0008	2.8445E-01	6.2039E-03	0.0005	2.9198E-03	1.4607E-07	0.0950

NEA/NSC/DOC(95)03/VIII
Volume VIII

ALARM-TRAN-AIR-SHIELD-001

Table F-2. Photon leakage from SILENE fuel solution and relative errors (cont)

Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.	Group upper energy (MeV)	Leakage	Rel. err.
2.9825E+00	2.6196E-03	0.0008	2.8165E-01	6.2117E-03	0.0005	2.8621E-03	1.4374E-07	0.0974
2.9532E+00	2.6898E-03	0.0008	2.7884E-01	6.1760E-03	0.0005	2.8043E-03	1.2402E-07	0.1055
2.9238E+00	2.7581E-03	0.0008	2.7604E-01	6.1678E-03	0.0005	2.7465E-03	5.7877E-08	0.1548
2.8945E+00	2.8624E-03	0.0008	2.7324E-01	1.1421E-02	0.0004	2.7197E-03	6.6674E-08	0.1378
2.8651E+00	2.7923E-03	0.0008	2.6804E-01	1.1393E-02	0.0004	2.6929E-03	4.4109E-08	0.1699
2.8371E+00	2.8833E-03	0.0008	2.6284E-01	1.1512E-02	0.0004	2.6662E-03	5.3004E-08	0.1624
2.8092E+00	2.9309E-03	0.0008	2.5764E-01	1.1660E-02	0.0004	2.6394E-03	5.3044E-08	0.1526
2.7812E+00	3.0246E-03	0.0007	2.5244E-01	1.1802E-02	0.0004	2.6126E-03	4.1526E-08	0.1849
2.7533E+00	3.1113E-03	0.0007	2.4724E-01	5.5208E-03	0.0005	2.5871E-03	6.3599E-08	0.1531
2.7253E+00	3.0516E-03	0.0007	2.4483E-01	5.5463E-03	0.0005	2.5616E-03	7.6584E-08	0.1370
2.6987E+00	3.1264E-03	0.0007	2.4242E-01	5.6007E-03	0.0005	2.5362E-03	3.9958E-08	0.1779
2.6721E+00	3.1894E-03	0.0007	2.4000E-01	5.6108E-03	0.0005	2.5107E-03	5.5311E-08	0.1495
2.6456E+00	3.2580E-03	0.0007	2.3759E-01	5.6324E-03	0.0005	2.4852E-03	9.9348E-08	0.1175
2.6190E+00	3.4014E-03	0.0007	2.3518E-01	5.3768E-03	0.0005	2.4379E-03	8.0237E-08	0.1295
2.5924E+00	3.2662E-03	0.0007	2.3289E-01	5.4098E-03	0.0005	2.3906E-03	7.5947E-08	0.1320
2.5671E+00	3.3515E-03	0.0007	2.3059E-01	5.4113E-03	0.0005	2.3433E-03	8.4585E-08	0.1248
2.5418E+00	3.4568E-03	0.0007	2.2830E-01	5.4399E-03	0.0005	2.2960E-03	8.2091E-08	0.1291
2.5166E+00	3.4913E-03	0.0007	2.2600E-01	5.4265E-03	0.0005	2.2487E-03	8.5775E-08	0.1281
2.4913E+00	3.5832E-03	0.0007	2.2371E-01	5.1902E-03	0.0006	2.2059E-03	6.6240E-08	0.1376
2.4660E+00	2.3367E-03	0.0008	2.2153E-01	5.2179E-03	0.0006	2.1631E-03	7.6960E-08	0.1299
2.4498E+00	2.3470E-03	0.0008	2.1935E-01	5.2583E-03	0.0006	2.1203E-03	5.8937E-08	0.1498
2.4337E+00	2.4025E-03	0.0008	2.1716E-01	5.2514E-03	0.0006	2.0775E-03	7.9806E-08	0.1266
2.4175E+00	2.4240E-03	0.0008	2.1498E-01	5.2558E-03	0.0006	2.0347E-03	1.1359E-07	0.1098
2.4014E+00	2.4696E-03	0.0008	2.1280E-01	5.0116E-03	0.0006	1.9447E-03	1.1763E-07	0.1051
2.3852E+00	6.1313E-04	0.0017	2.1072E-01	4.9516E-03	0.0006	1.8547E-03	7.5458E-08	0.1279
2.3812E+00	6.1507E-04	0.0016	2.0865E-01	4.9192E-03	0.0006	1.7646E-03	8.8866E-08	0.1233
2.3772E+00	6.1246E-04	0.0016	2.0657E-01	4.8412E-03	0.0006	1.6746E-03	9.7611E-08	0.1184
2.3733E+00	6.2039E-04	0.0016	2.0450E-01	4.8082E-03	0.0006	1.5846E-03	5.6377E-08	0.1483
2.3693E+00	6.2149E-04	0.0016	2.0242E-01	4.5002E-03	0.0006	1.5145E-03	5.2908E-08	0.1588
2.3653E+00	6.0790E-04	0.0017	2.0045E-01	4.4753E-03	0.0006	1.4444E-03	4.9985E-08	0.1589
2.3614E+00	6.0850E-04	0.0017	1.9847E-01	4.4039E-03	0.0006	1.3743E-03	6.8388E-08	0.1388
2.3575E+00	6.2782E-04	0.0016	1.9650E-01	4.3833E-03	0.0006	1.3042E-03	4.8329E-08	0.1643
2.3535E+00	6.1719E-04	0.0016	1.9452E-01	4.3079E-03	0.0006	1.2341E-03	4.1639E-08	0.1809
2.3496E+00	6.2140E-04	0.0016	1.9255E-01	4.0614E-03	0.0006	1.1795E-03	2.6782E-08	0.2231
2.3457E+00	1.2370E-03	0.0012	1.9067E-01	4.0187E-03	0.0006	1.1249E-03	1.5991E-08	0.2859
2.3379E+00	1.2310E-03	0.0012	1.8879E-01	3.9503E-03	0.0006	1.0703E-03	2.8366E-08	0.2151
2.3302E+00	1.2544E-03	0.0012	1.8692E-01	3.9206E-03	0.0006	1.0157E-03	1.1456E-08	0.3488
2.3224E+00	1.2852E-03	0.0011	1.8504E-01	3.8678E-03	0.0006	1.0000E-03		
2.3147E+00	1.3141E-03	0.0011	1.8316E-01	3.6367E-03	0.0007			
2.3069E+00	2.4704E-03	0.0008	1.8137E-01	3.5902E-03	0.0007			

(Minimum energy)

ALARM-TRAN-AIR-SHIELD-001

APPENDIX G: DISCUSSION OF CAAS DETECTOR PERFORMANCE

G.1 CIDAS MkX CAAS

Babcock International Group, now known as Cavendish Nuclear, is working to release their internal report concerning the CIDAS MkX detector. At the time of publication, it was not available for public release.

G.2 Rocky Flats CAAS

Lawrence Livermore National Laboratory provided several CAAS detectors that had been used at Rocky Flats. Below are 2 LLNL reports that discuss their performance.



LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

ALARM-TRAN-AIR-SHIELD-001

Rocky Flats Neutron Detector Testing at Valduc, France

G. M. Dulik and S. S. Kim

January 18, 2011

Approved for public release; distribution is unlimited.

ALARM-TRAN-AIR-SHIELD-001

Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes.

Auspices Statement

This work performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under Contract DE-AC52-07NA27344.

ALARM-TRAN-AIR-SHIELD-001

1. INTRODUCTION

Recent program requirements of the US Department of Energy/NNSA have led to a need for a criticality accident alarm system to be installed at a newly activated facility. The Criticality Safety Group of the Lawrence Livermore National Laboratory (LLNL) was able to recover and store for possible future use approximately 200 neutron criticality detectors and 20 master alarm panels from the former Rocky Flats Plant in Golden, Colorado when the plant was closed. The Criticality Safety Group participated in a facility analysis and evaluation, the engineering design and review process, as well as the refurbishment, testing, and recalibration of the Rocky Flats criticality alarm system equipment to be used in the new facility.

In order to demonstrate the functionality and survivability of the neutron detectors to the effects of an actual criticality accident, neutron detector testing was performed at the French CEA Valduc SILENE reactor from October 7 to October 19, 2010. The neutron detectors were exposed to three criticality events or pulses generated by the SILENE reactor. The first excursion was performed with a bare or unshielded reactor, and the second excursion was made with a lead shielded/reflected reactor, and the third excursion with a polyethylene reflected core.


These tests of the Rocky Flats neutron detectors were performed as a part of the 2010 Criticality Accident Alarm System Benchmark Measurements at the SILENE Reactor. The principal investigators for this series of experiments were Thomas M. Miller and John C. Wagner of the Oak Ridge National Laboratory, with Nicolas Authier and Nathalie Baclet of CEA Valduc. Several other organizations were also represented, including the Y-12 National Security Complex, Lawrence Livermore National Laboratory, Los Alamos National Laboratory, CEA Saclay, and Babcock International Group.

2. DETECTORS

Several weeks prior to the experiment, a number of detectors (12) were selected from LLNL stock and processed through the alignment and calibration procedures (Reference 1) that Rocky Flats had developed and refined over approximately 15 years of experience with this basic design. The process consists of two primary phases, the first phase being electrical and mechanical bench checks including electronic adjustments and alignment of the detector subunits, and the second phase being an irradiation with a well characterized neutron source, typically a TRIGA reactor. Detector calibration at LLNL and TRIGA reactor testing procedures were videotaped in a DVD (Reference 2). Two detectors showing LCD display and LED alarm indicator, tested with a moderated californium source at LLNL are shown in Figure 1.

Figure 1. Rocky Flats Neutron Detectors.

ALARM-TRAN-AIR-SHIELD-001

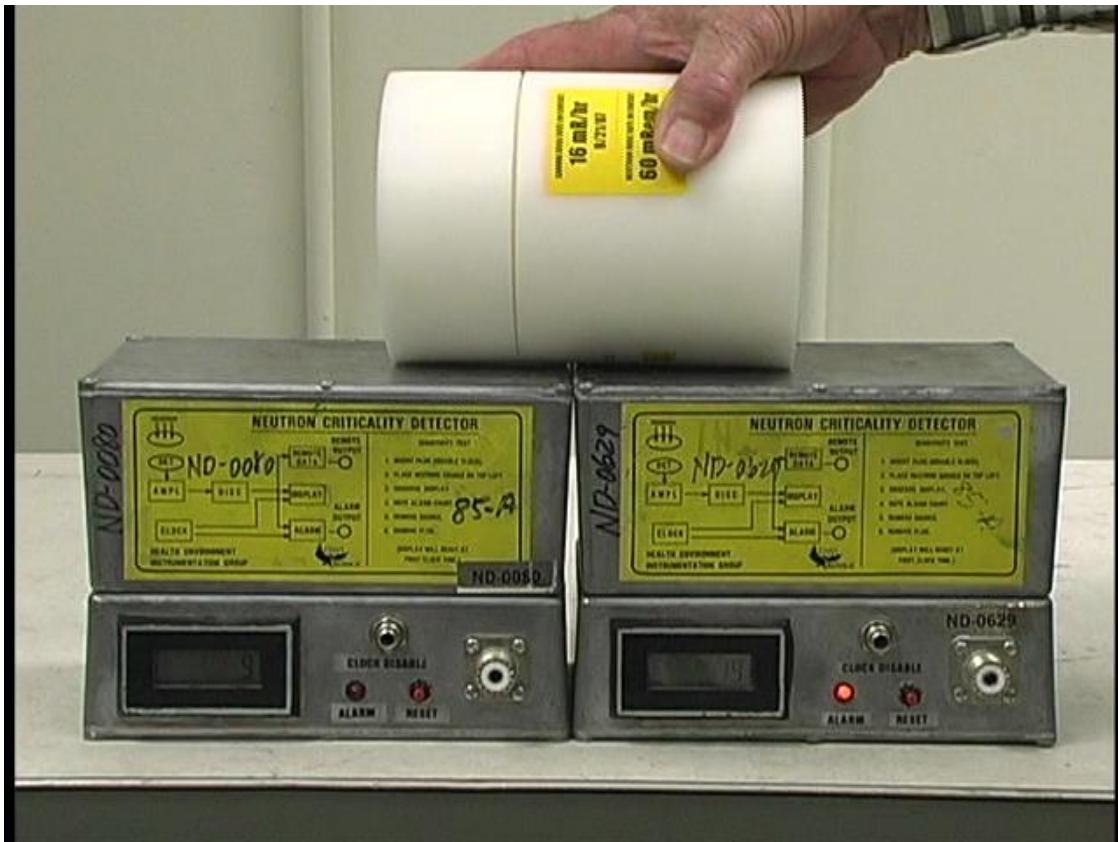

LLNL personnel performed the initial bench checks, adjustments, and tests during the first two weeks of September, 2010. On September 17, 2010 the detectors were taken to the UC Davis McClellan Nuclear Research Center in Sacramento, California for the neutron source response tests.

Detector count rates and the thermal neutron flux for the four detectors used at Valduc are shown in Table 1.

ALARM-TRAN-AIR-SHIELD-001

Table 1. Detector Count Rate vs. Thermal Flux.

Detector No.	Detector ID	Detector	Thermal	Detector
		Count rate		
		Avg. of 3	Neutron	Normalization
		1 minute tests	(n/cm ² -sec)	Factor
		(cpm)		
D1	ND-0028	13,261	551	24.07
D2	ND-0242	6,779	585	11.59
D3	ND-0632	4,226	549	7.70
D4	ND-0450	8,177	569	14.37
				Count Rate / Thermal Flux

As shown in Table 1, a detector efficiency or normalization factor was derived so the counts from each detector/location pair used in the experiment could be compared on a common basis.

3. DETECTOR PLACEMENT

Four neutron detectors were placed in the experimental area, three inside and one outside the reactor cell (see Figure 2). Table 2 identifies the detector serial number that was placed at each of the four locations for the experiments.


Table 2. Four Detectors used in the Experiments.

Detector No.	Location	Configuration	Detector ID
D1	Collimator B	Concrete Shield	ND-0028
D2	Collimator A	Unshielded	ND-0242
D3	Scattering Box	Partially Shielded	ND-0632
D4	Outside Reactor Cell	Heavy Cell Wall Shield	ND-0450

The collimators are box-shaped structures having five solid sides with an open sixth side facing the reactor. The side of the collimator facing the reactor is 1 m x 1 m. The other dimension of the box is 0.65 m. The collimator walls are constructed of stainless steel, copper, lead, and borated polyethylene.

ALARM-TRAN-AIR-SHIELD-001

Figure 2. Four detectors placed at collimator b, collimator a, scattering box, and outside reactor cell.

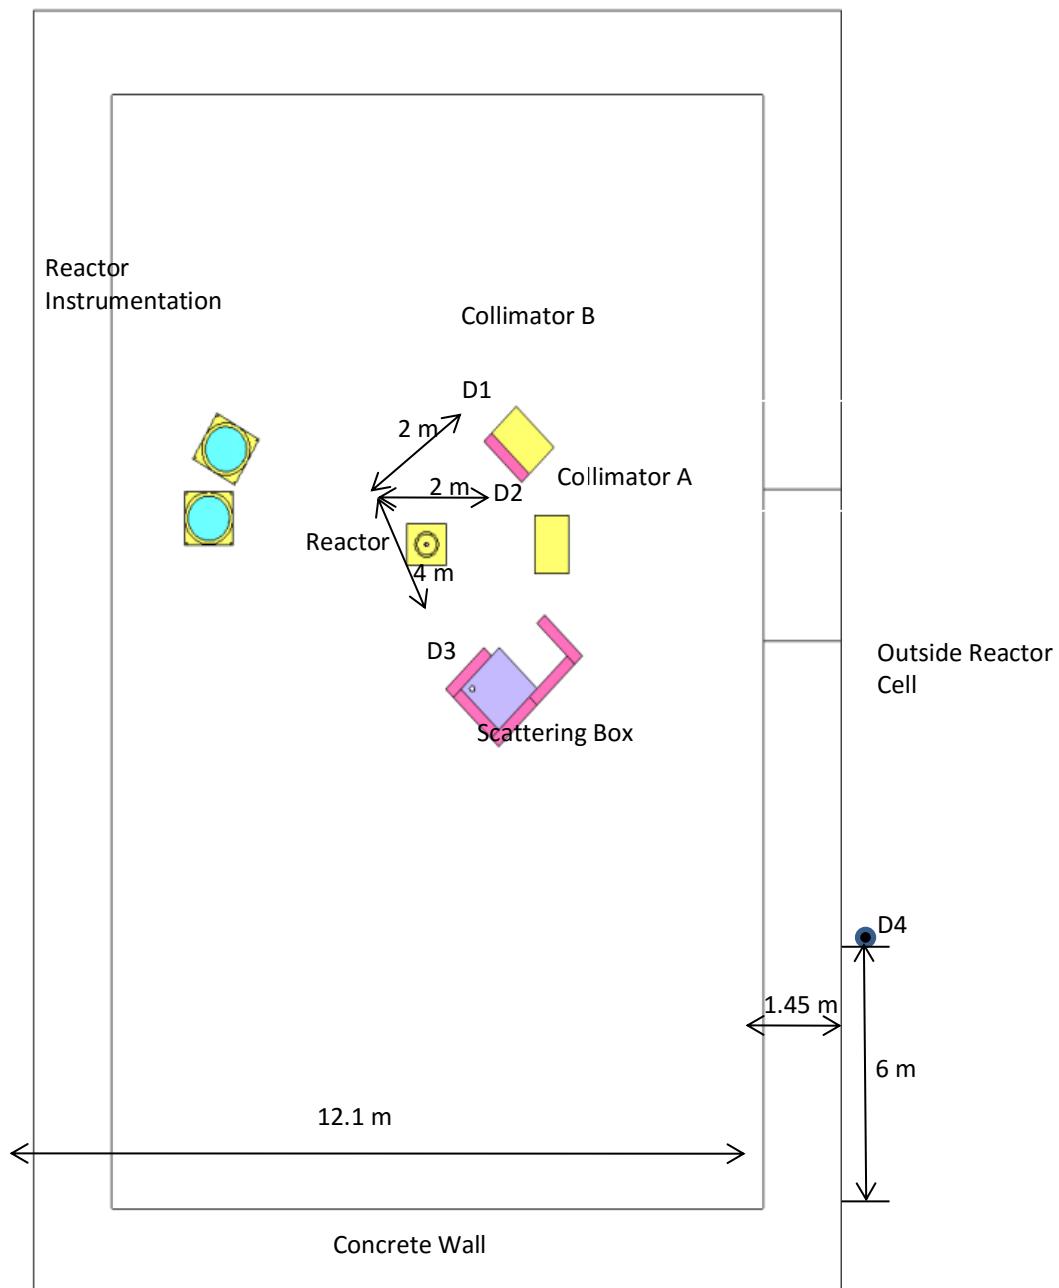

ALARM-TRAN-AIR-SHIELD-001

The purpose of the collimator box in these experiments is to effectively eliminate the contribution from particles that scatter in the walls or other equipment in the reactor cell. Detectors in the collimator box, if the collimator is shielded, will primarily measure the transmission of particles through the shielding materials. A detector inside an unshielded collimator will primarily measure direct radiation from the reactor. For these experiments, collimator A was used unshielded, and collimator B was used in a shielded configuration. The distance from the center of the reactor to Collimator A, Collimator B, and scattering box are 2, 2, and 4 m, respectively.

The scattering box refers to a detector placement and configuration of shielding materials such that there is no direct line of sight from the reactor to the detectors. Therefore, the majority of the measured neutron radiation will have been scattered and a majority of the measured photon radiation are secondary photons produced by neutrons.

4. EXPERIMENTAL OBSERVATIONS

During the experiments, the neutron detector LED alarm indicator was checked to verify that the detector alarmed during criticality accident situations, and the integrated counts displayed on each detector's front panel LCD display were recorded to determine the relative levels of thermal neutron fluence detected by the unit at each of the four locations. A pulse output available on the rear of each detector was connected to a data acquisition system that was setup and controlled by a laptop computer system in an area adjacent to the reactor control room. The system had an independent counter for each detector channel, and logged the data onto a micro SD data card for later analysis.

October 7, 2010 (Thursday): LLNL staff arrived at the Valduc facility with detectors and instrumentation. After arranging access, the equipment was transported to the SILENE facility. The Rocky Flats neutron detectors and other materials were unpacked and inspected for damage. No damage was evident to any of the materials. The internal batteries of the neutron detectors were given a refresh charge to bring them to full capacity. The experimental plan was reviewed and detector placement was discussed with the other experimenters and the Valduc staff.

October 8, 2010 (Friday): Four detectors were placed in the experimental reactor cell in the locations indicated in Figure 2. Due to the minimal cabling available from the reactor cell to the diagnostic area, we were not able to use a line-operated DC power supply to provide latching power for the criticality alarm LEDs as originally planned. Normally this power is provided from the criticality alarm system central panel over the common power and alarm transmission link. External battery packs with dry cell batteries were installed on each detector to power the front-panel criticality alarm indicator LED. The available cables were patched from the detector at each of the four locations and routed to the diagnostic room adjacent to the reactor control room. The detector cables were connected to a laptop computer data acquisition system to record the event pulses from each detector.

October 11, 2010 (Monday): The first pulse, a size of 1.9×10^{17} fissions, was generated in 1.7 msec by a bare reactor. Magnetite concrete with a density of 3.9 g/cm^3 and a 20 cm-thick slab was used as the shielding for Collimator B. Due to communication difficulties between the reactor control room operator and the data

ALARM-TRAN-AIR-SHIELD-001

acquisition operator, the data collection was not triggered until briefly after the initial critical pulse had occurred. Data was recorded for 37 seconds after triggering and are summarized in Table 3.

Table 3. Integrated Counts Recorded on Laptop / Logger for Pulse #1.

t = 37 seconds

Detector No.	Location	Detector ID	Integrated Counts
D1	Collimator B	ND-0028	847,314
D2	Collimator A	ND-0242	834,028
D3	Scattering Box	ND-0632	642,368
D4	Outside Reactor Cell	ND-0450	10,187

Table 3 integrated counts were then divided by the adjustment factors in Table 1 to get the normalized counts. Table 4 summarizes these counts.

Table 4. Normalized Logged Counts for Pulse #1.

t = 37 seconds

Detector No.	Location	Detector ID	Integrated Counts	Normalization Factor	Normalized Counts
D1	Collimator B	ND-0028	847,314	24.07	35,206
D2	Collimator A	ND-0242	834,028	11.59	71,973
D3	Scattering Box	ND-0632	642,368	7.70	83,446
D4	Outside Reactor Cell	ND-0450	10,187	14.37	709

Approximately four hours after the pulse, when activation and radiation levels had decreased enough to allow safe access to the reactor cell, experimenters entered the cell to retrieve the foils and record the LCD readout displays on the criticality detectors. The counts shown on the detector LCD displays were recorded as shown in Table 5. The LCD counts for D4 were not recorded because an assigned record-keeper was in a hurry to exit the reactor area. Criticality alarm indicator LEDs were illuminated on all detectors as expected. The power was removed from the detectors after the observations were made in order to preserve the battery life. According to Tables 4 and 5, thermal neutron fluence is highest at the detector of the scattering box, Collimator A, Collimator B, and outside reactor cell, in the descending order.

Table 5. Normalized Counts Shown on LCD for Pulse #1.
t = 37 seconds

ALARM-TRAN-AIR-SHIELD-001

Detector No.	Location	Detector ID	LCD Counts	Normalization Factor	Normalized Counts	Alarm LED lit?
D1	Collimator B	ND-0028	530,935	24.07	22,058	Yes
D2	Collimator A	ND-0242	907,587	11.59	78,308	Yes
D3	Scattering Box	ND-0632	967,609	7.70	125,664	Yes
D4	Outside Reactor Cell	ND-0450	*	14.37	----	Yes

*Not recorded.

October 12, 2010 (Tuesday): Preparation for the second pulse was made. To avoid the communication problems that caused the first data recording to be started late, it was decided to start recording well before the event trigger. The data acquisition software was modified to record for a longer period, which was set to correspond with a file size of 192 MB, or 8.06 minutes. Operation of the modified software was verified, and simulated inputs on all detector channels were logging correctly to the memory card. A meeting was held in the afternoon with the Valduc radiation physics and dosimetry group staff and the experimenters to discuss early dosimetry and activation analysis results of the first pulse.

October 13, 2010 (Wednesday): Prior to the second pulse, the experimenters entered the reactor cell to place the new foils and repower the criticality detectors. The voltage of the internal batteries in each of the neutron detectors was measured and found to within specification. The external battery packs which power the criticality alarm LED and latch were evaluated for condition. The external dry cell batteries on all of the detectors except for the unit in the scattering box were found to be in a discharged, low-voltage condition and were replaced.

The second pulse, a size of 2.1×10^{17} fissions, was generated by the lead reflected SILENE reactor. The concrete shielding slab for Collimator B had been changed to one constructed of regular concrete, having a density of 2.3 g/cc. The logging software was started well in advance of the reactor pulse in order to capture the initial events. An examination of the recorded data shows the initiation of the criticality as reflected by the count rates at 1.59 minutes into the data record. The data recorded by the logger is summarized in Table 6.

Table 6. Normalized Logged Counts for Pulse #2

t = 484 seconds

Detector No.	Location	Detector ID	Integrated Counts	Normalization Factor	Normalized Counts

ALARM-TRAN-AIR-SHIELD-001

D1	Collimator B	ND-0028	0	24.07	----
D2	Collimator A	ND-0242	1,780,150	11.59	153,594
D3	Scattering Box	ND-0632	0	7.70	----
D4	Outside Reactor Cell	ND-0450	10,751	14.37	748

Note that there was no data recorded for detector channels D1 and D3. Examination of the detectors indicated that they were functional. After the pulse, a local simulation test at the data logger showed that it was correctly logging data applied to all inputs, including channels D1 and D3. The cause of the missed data is unknown at this time.

Approximately four hours after Pulse #2 when activation and radiation levels had decreased enough to allow safe access to the reactor cell, experimenters entered the cell to retrieve the foils and record the LCD readout displays on the detectors. The counts shown on the detector LCD displays were recorded as shown in Table 7. Criticality alarm indicator LEDs were illuminated on Detectors 1, 2, and 4. According to the normalized counts, thermal neutron fluence is highest at the detector of the scattering box, Collimator A, Collimator B, and Outside Reactor Cell in the descending order.

Table 7. Normalized Counts Shown on LCD for Pulse #2
t = 484 seconds

Detector No.	Location	Detector ID	LCD Counts	Normalization Factor	Normalized Counts	Alarm LED lit?
D1	Collimator B	ND-0028	550,381	24.07	22,866	Yes
D2	Collimator A	ND-0242	737,656	11.59	63,656	Yes
D3	Scattering Box	ND-0632	892,989	7.70	115,973	No
D4	Outside Reactor Cell	ND-0450	10,358	14.37	721	Yes

No indicator was reported as lit on detector 3, located in the scattering box. The detector appears to have been functional, as the LCD was operating and indicating a reasonable number. The scattering box detector did not have new dry cells installed for this test. If the cells have a low capacity, the alarm LED will not remain illuminated.

Figures 3 and 4 show accumulated counts versus record number (time) for Pulse #2 for two time scales. These data were obtained from the laptop computer data acquisition system. As shown in the short time scale in Figure 4, initial slope on D2/counter 2 looks almost like an exponential, indicating the start of the short

ALARM-TRAN-AIR-SHIELD-001

pulse. The accumulated counts are supposed to be saturated after the pulse, but the reason for continued increase is not known at the time of this writing.

Figure 3. Accumulated Counts up to Record Number 1951.


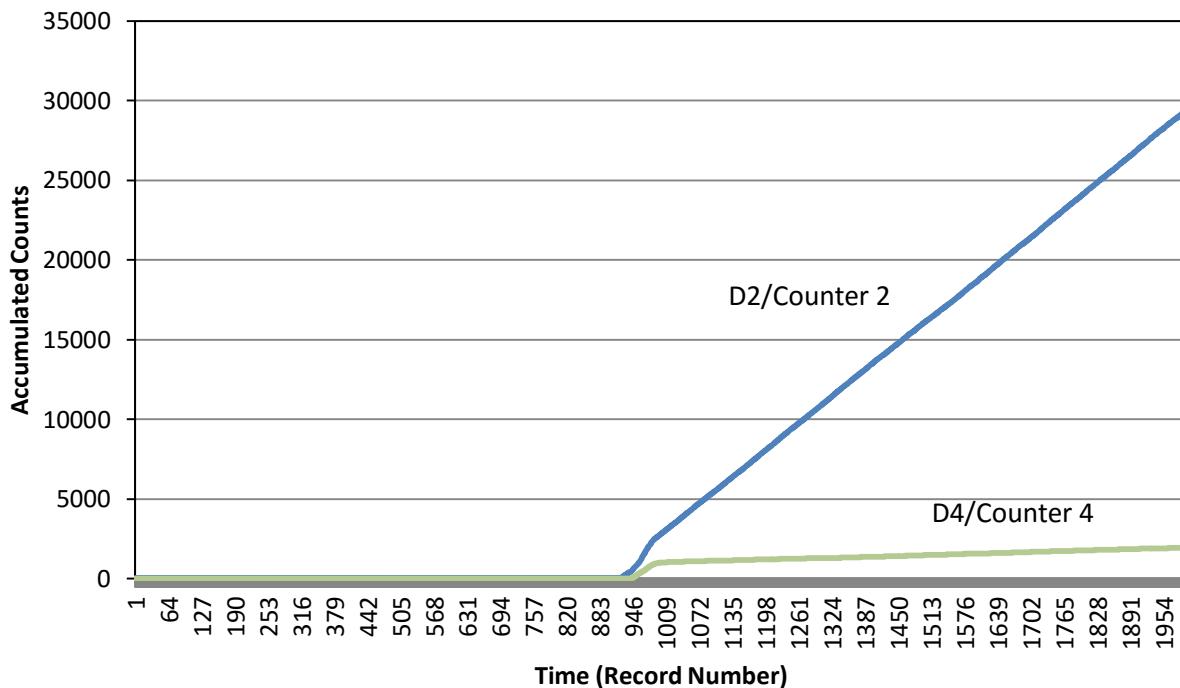


Figure 4. Accumulated Counts up to Record Number 497.

ALARM-TRAN-AIR-SHIELD-001

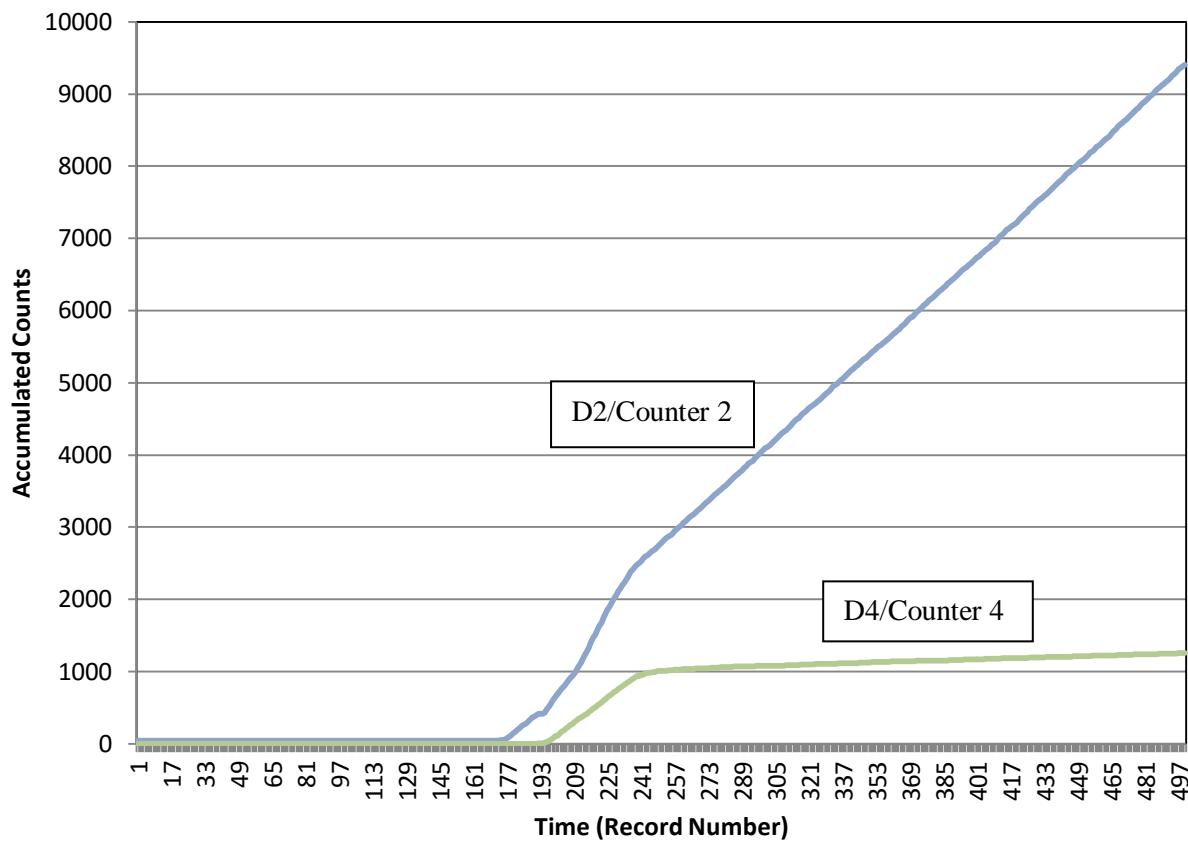

LLNL staff left Valduc on October 13, 2010, but the four detectors were left there to obtain more data for additional pulses. On January 11, 2011, Richard Hunter from Babcock International provided additional

ALARM-TRAN-AIR-SHIELD-001

measurement data for Pulse #3. This last pulse was made by a polyethylene reflected SILENE reactor on **October 19, 2010 (Tuesday)**. Table 8 summarizes integrated and normalized counts for the four detectors. Criticality alarm indicator LEDs were illuminated on all detectors except D3 of the scattering box, and the thermal neutron fluence was highest at D2 of Collimator A instead of D3 in the scattering box.

Table 8. Normalized Counts Shown in LCD for Pulse #3.

Detector No.	Location	Detector ID	Integrated Counts	Normalization Factor	Normalized Counts	Alarm LED lit?
D1	Collimator B	ND-0028	466,532	24.07	19,382	Yes
D2	Collimator A	ND-0242	806,862	11.59	69,617	Yes
D3	Scattering Box	ND-0632	516,776	7.70	67,114	No
D4	Outside Reactor Cell	ND-0450	1658	14.37	115	Yes

5. SUMMARY

According to the experimental results, thermal neutron fluence was highest at the detector in the scattering box for Pulses #1, and #2. For Pulse #3, the thermal neutron fluence was highest at the detector of Collimator A. Criticality alarm indicator LEDs were illuminated on detectors as expected. The Rocky Flats neutron detectors appeared to have functioned as intended in an actual criticality situation.

When the detectors can be released from the SILENE radioactive material control area, they will be shipped back to LLNL. When the detectors arrive at LLNL, they will be inspected and tested according to the calibration procedure they went through prior to the experiment. Data recorded in this process will be compared to the previous data to determine if there has been any significant change in electrical parameters.

6. REFERENCES

- 1). Annual Calibration of Model 85A and NCD-91 Neutron Criticality Detectors,
4-16000-RI-4301, Rocky Flats Plant (December 1993).
- 2). Calibration of DAF Criticality Accident Alarm System, LLNL-VIDEO-402771
(March 2009).



LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

ALARM-TRAN-AIR-SHIELD-001

Cs-137 Gamma Ray Shots for Rocky Flats Neutron Detectors

G. M. Dulik and S. S. Kim

January 26, 2011

Approved for public release; distribution is unlimited.

ALARM-TRAN-AIR-SHIELD-001

Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes.

Auspices Statement

This work performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under Contract DE-AC52-07NA27344.

Cs-137 Gamma Ray Shots for Rocky Flats Neutron Detectors

ALARM-TRAN-AIR-SHIELD-001

G. M. Dulik and S. S. Kim
Lawrence Livermore National Laboratory

Gamma ray exposure testing was performed on January 19, 2011 at a gamma ray irradiation facility in the Lawrence Livermore National Laboratory. A ^{137}Cs source was elevated to exposures indicated by a calibrated meter on a trolley. The detector (References 1 and 2) under test was then placed on the trolley and exposed for a one minute period. The test jack was inserted in its port on the front of the detector to allow the counter to accumulate.

Table 1 summarizes test results. There were no alarms at 100 mR/hr gamma ray field. Note that the detector alarms at 16 counts per sec. At 650 mR/hr and above, all the detectors alarmed, indicating that the detector is sensitive to a gamma field. Four detectors alarmed at 1 R/hr even when lithium fluoride disk was removed from the detector.

This testing showed that the neutron detector is responding in a mixed field of neutron and gamma ray. It can be a feature of the Rocky Flats neutron detector, which can also be applied to gamma ray detection in a criticality accident situation.

Table 1. Gamma Ray Sensitivity.

Detector ID	Number of Alarms (per minute)				
	100 mR/hr	650 mR/hr	1 R/hr	1 R/hr (Detector Reversed)	1 R/hr (No LiF Disk)
NCD-0997	0 (0 counts)	2	5	4	4
NCD-0596	0 (30 counts)	17	47	47	44
NCD-0450	0 (12 counts)	33	93	85	83
NCD-0633	0 (19 counts)	39	101	86	90

REFERENCES

- 1). Annual Calibration of Model 85A and NCD-91 Neutron Criticality Detectors,
4-16000-RI-4301, Rocky Flats Plant (December 1993).
- 2). Calibration of DAF Criticality Accident Alarm System, LLNL-VIDEO-402771
(March 2009).

ALARM-TRAN-AIR-SHIELD-001

APPENDIX H: ADDITIONAL DOCUMENTATION OF EXPERIMENTAL DETAILS

H.1 Collimator Box Stainless Steel Z2 CN 18-10 Analysis

220394 RIA 016		PS 30	34946	Certificat No. Zertifikat Nr. N° du certificat						
OUTOKUMPU		CERTIFICAT DE RECEPTION 3.1 EN 10204 3.1		357993/001 1 Date Datum Date 02.05.07						
Delivery address, Envoi à l'adresse, Lieu de livraison DESCALINOX SNC PARC ACTIVITES LES CHENES LES ECHETS 01700 MIRIBEL FRANCE		DESCALINOX SNC PARC ACTIVITES LES CHENES LES ECHETS 01700 MIRIBEL FRANCE								
Requirements, Anforderungen, Exigences EN 10028-7 ASTM A240/A240M -06 ASME 2004 SEC. II PART A SA-240 A05		Our Order No. Unser Auftrag Nr. N° de commande n° 13111		Your order, Ihre Bestellung, Votre commande 106591/00 OSERA 24887						
Product, Erzeugnism, Produit TOLE, ACIER INOXYDABLE Grade, Werkstoff, Nuance		Mark of Manufacturer Zeichen des Lieferwurks Signe du producteur OUTOKUMPU	Process Eisenmalzungsart Méthode de fission AOD	Impressora sta Zeichen d. Se Pochoir de l'ex						
1.4307 TYPE 304L TYPE 304 Marking, Kennzeichnung, Marquage		Tolerances, Toleranzen, Tolérances EN ISO 9445 (EN10259)								
1.4307 2B		Marks, Verarbeitzeichen, Marques 106591/00 OSERA 24887								
Line Reihen Ligne	Item Position Posita	Charge-No. Schnellz-Probe-Nr. Coulisse n°	Size, Abmessungen, Dimensions	Quantity Stückzahlen Nombre	Weight, Gewicht, Poids	Finish Ausführung Fin				
1 2 3 4	1 5 6 9	60356 1 60732 3 60372 6 60106 6	1,0 X 1000 X 2000 MM 1,2 X 1250 X 2500 MM 1,2 X 1500 X 3000 MM 2,0 X 1000 X 2000 MM	128 102 72 484	2036 KG 3018 KG 3088 KG 15070 KG	2B 2B 2B 2B				
Charge No. Bestell-Nr. Coulisse n°	Chemical composition, Chemische Zusammensetzung, Composition chimique					# pieces Total mass 205332				
	C %	Si %	Mn %	P %	S %	Cr %	Ni %	N %		
60356 60732 60372 60106	0,024 0,023 0,024 0,020	0,40 0,39 0,36 0,40	1,72 1,62 1,58 1,63	0,031 0,032 0,033 0,031	0,002 0,002 0,005 0,002	18,2 18,2 18,2 18,3	8,1 8,1 8,2 8,1	0,051 0,048 0,042 0,049	AR: 220394 POSTE 32	
Line Reihen Ligne	Mechanical properties, Mechanische Eigenschaften, Caractéristiques mécaniques							CERTIFIE SUIVANT LA DIRECTIVE APPAREILS PRESSION 97/23/CE PA TUEV CERT, CORPS DE CERTIFICATION POUR APPAREILS A PRESSION TUEV NORD SYSTEMS GM & CO. KG, CORPS NOTI ENREGISTREMENT NO. 0		
Location Ort Lieu	Ppo.2 N/mm ²	Ppo.10 N/mm ²	Prm N/mm ²	A5 %	A50 %	%	Hardness Härte/Durabilité HB30.			
1 2 3 4	E E E E	316 308 311 314	352 344 345 348	654 644 643 620	64 62 64 63	57 58 58 59	178 171 167 173			
Identify test, Verwachungstestprüfung, Contrôle d'identification Size, Abmessungen, Dimensions Surf., Oberfläche, Surface Test of Integrit., poros., Prüfung auf Integrität, Korros., Test de corros., Intégrité, EN ISO 3651-2 A: CONFORME								O.B., O.B., O.B.,	A = Beginning / Anfang / Début E = End / Ende / Fin	
EN 10098-2/1.4307								We certify that the above mentioned products comply with the terms of the order contract. Wir bestätigen, dass die Lieferung den Vereinbarungen der Bestellvertrag entspricht. Nous certifions que les produits énumérés ci-dessus sont conformes aux prescriptions de la commande.		
								This test certificate is made by controlled ADP-system and is valid without signature. Das Zeugnis wurde mit dem überprüften Datenver- arbeitungssystem erstellt und ist ohne Unterschrift gültig. Ce certificat a été établi par un système informatique contrôlé et est valide sans signature.		
								Outokumpu Stainless Oy Authorized Inspector Werkschauinslander RUKAJARVI JORM Inspecteur autorisé FIN-55400 Turku, Finland		

ALARM-TRAN-AIR-SHIELD-001

H.2 PPB9 Analysis



PLÂTRE POLYÉTHYLÈNE BORÉ (COMPOUND ROBATEL N°9)

1 - PRÉSENTATION

Le plâtre polyéthylène boré est un composé neutrophage réalisé par addition d'eau de gâchage et de granulés d'un matériau organique riche en hydrogène à un mélange de plâtre et d'un matériau boré (colémanite) de façon à obtenir une pâte coulable.


NOTA : Les caractéristiques du matériau sont données après la prise dans un caisson étanche ; à l'air libre, le matériau perd de l'eau libre par séchage.

2 - COMPOSITION CHIMIQUE

2.1 - Élémentaire

Elle est donnée dans le tableau suivant :

Éléments	% en masse	10 ³⁰ atomes/m ³
Après la prise (sans séchage)		
Densité : 1.20		
H	8,52	6,10.10 ⁻²
B	0,97	6,47.10 ⁻⁴
Ca	9,82	1,77.10 ⁻³
C	35,10	2,11.10 ⁻²
O	37,64	1,70.10 ⁻²
S	6,85	1,54.10 ⁻³
Divers	1,11	
Après séchage*		
Densité : 1.03		
H	8,08	5,01.10 ⁻²
B	1,13	6,47.10 ⁻⁴
Ca	11,45	1,77.10 ⁻³
C	40,92	2,11.10 ⁻²
O	29,15	1,13.10 ⁻²
S	7,98	1,54.10 ⁻³
Divers	1,29	
Après échauffement à une température supérieure à 110°C**		
Densité : 0,96		
H	7,85	4,49.10 ⁻²
B	1,21	6,47.10 ⁻⁴
Ca	12,27	1,77.10 ⁻³
C	43,87	2,11.10 ⁻²
O	24,85	8,98.10 ⁻³
S	8,56	1,54.10 ⁻³
Divers	1,39	

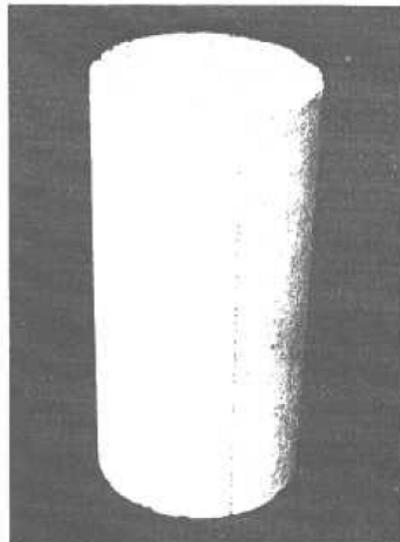

* Perte totale de l'eau libre

** Perte de 3/2 de H₂O à 110°C

2.2 - Matériaux (pourcentage pondéral)

On donne ici la composition initiale (avant la prise).

• Plâtre Polyéthylène boré

Polyéthylène : 41 (40 à 42)
Gypse (2CaSO₄. 3H₂O) : 36,77 (35 à 38)
Colémanite : 8
Eau libre : 14,23 (14 à 15)

• Colémanite (2CaO, 3B₂O₃, 5H₂O) théorique

En pourcentage pondéral (1) :

B ₂ O ₃ :	39	MgO :	4,5
CaO :	22	Al ₂ O ₃ :	4,5
SiO ₂ :	8	SrO :	2
H ₂ O :	18	K ₂ O :	0,1
Divers :			2

Soit une concentration minimale en bore de 12 %.

ALARM-TRAN-AIR-SHIELD-001

H.3 Barite Concrete Analysis



Laboratoire d'Etudes et de
Recherches sur les Matériaux

Procès verbal d'essais.8952/1241.LC

**CARACTERISATION CHIMIQUE
D'UN BETON DE BARYTE**

Laboratoire d'essai	Demandeur d'essai
LERM 23, rue de la Madeleine BP 60136 - 13631 ARLES CEDEX	CEA SACLAY Direction de l'énergie Nucléaire Centre de Saclay 91191 GIF SUR YVETTE CEDEX
Section Microstructure et Chimie	Madame MASSE
Dossier n° 06.09.8952 Devis n° DV 9369/BCM54	Réf. : Bon de commande n° 4000266753 / P5B63 du 19.12.2006
	Objet : Caractérisation chimique d'un béton

Siège social et laboratoires
23, rue de la Madeleine
BP 60136-13631 Arles cedex
Tél.: 04 90 18 30 30
Fax: 04 90 96 30 30
E-mail : Contact@lerm.fr

WWW.lerm.fr

Agence Ile de France
19, passage Charles Dallery
75011 PARIS
Tél.: 01 43 56 02 04
Fax: 01 43 56 05 09

Echantillon

Nature : Béton de baryte
Prélevé le : non communiqué
Date de réception : le 19 janvier 2007
Etat à la réception : correct

Transmis par : Ets SOUTRENON

Ref. LERM	Ref. CEA SACLAY
8952-4	Béton de Baryte

La reproduction de ce proces verbal d'essai n'est autorisée que sous sa forme intégrale. Il comporte deux pages (recto verso).

Certifié ISO 9001
par l'AFAQ

S.A. à Directoire et Conseil de surveillance au capital de 187 020 €- 344 297 775 RCS Arles - APE 742C

Page 1/2

ALARM-TRAN-AIR-SHIELD-001

lerm

METHODES D'ESSAIS

Conformément à la demande, les essais ont été effectués conformément aux textes de référence suivants :

- ▲ Dosage de bore par spectrométrie d'émission à plasma après fusion au carbonate de sodium selon l'instruction LERM IS/LC/E/57 ;
- ▲ dosage de 10 éléments (Si, Al, Fe, Ca, Mg, Ti, Mn, Cr, Sr, P) par spectrométrie d'émission à plasma après fusion au métaborate de lithium et reprise chlorhydrique selon l'instruction LERM IS/LC/E/08;
- ▲ dosage des alcalins par spectrométrie d'émission de flamme après fusion au métaborate de lithium selon l'instruction LERM IS/LC/E/08;
- ▲ analyse thermogravimétrique selon l'instruction LERM IS/LC/E/65 ;
- ▲ dosage des chlorures par potentiométrie selon l'instruction LERM IS/LC/E/25 ;
- ▲ dosage du carbone et de l'hydrogène sur appareil CHN Chromatographique par mesure de conductibilité thermique.

RESULTATS

Les résultats obtenus, exprimés en pourcentage massique, sont regroupés dans le tableau suivant.

Caractéristique mesurée	Valeur (% massique)
Si	7,24
Al	0,71
Fe	1,08
Ca	6,65
Mg	0,13
Ti	0,04
Mn	0,07
P	0,04
Cr	0,01
Sr	0,84
Na	0,04
K	0,25
Cl ⁻	< 0,01
C	0,30
B	< 0,1
H	0,40
Teneur en eau attribuable aux hydrates du liant	3,6

Observations : Il est à noter la présence d'un résidu insoluble après fusion correspondant probablement à des sulfates de baryum (environ 54 %). Il serait éventuellement intéressant de doser le baryum et les sulfates dans cet échantillon.

Essais réalisés au LERM en février 2007

Arles, le 2 mars 2007

Le responsable des essais

**Le responsable de la section
Microstructure et Chimie**

C. NGWE MOWENI

D. ROSSINI

*L'essai faisant l'objet du présent procès verbal d'essais portent sur un (des) échantillon(s) prélevé(s) dans certaines conditions. Sa représentativité est liée à celle (des) de l'échantillon(s) et ne peut être étendue à la population dont il(s) est (sont) issu(s) que si l'homogénéité de cette population peut être vérifiée.
La reproduction de ce procès verbal d'essais n'est autorisée que sous sa forme intégrale.*

Procès verbal d'essais.8952/1241.LC

Page 2/2

ALARM-TRAN-AIR-SHIELD-001

ETS SOUTRENON
PREFABRIQUES BETON
Z.A. Les Beluzes
42720 Pouilly Sous Charlieu
Tél. 04 77 69 30 29
Fax 04 77 69 30 25



FORMULATION

BETON BARYTE

Quantité par m³ de béton

Gravillon baryte 0/20 mm : 2.900 kg

Ciment PM/ES 52,5 : 355 kg

Adjuvant Advaflow 345 : 4 litres

Eau totale : 160 kg

Densité sur éprouvette témoin : 3,25

ALARM-TRAN-AIR-SHIELD-001

H.4 Magnetite Concrete Analysis



Laboratoire d'Etudes et de
Recherches sur les Matériaux

Procès verbal d'essais.8952/1242.LC

**CARACTERISATION CHIMIQUE
D'UN BETON DE MAGNETITE**

Laboratoire d'essai	Demandeur d'essai
LERM 23, rue de la Madeleine BP 60136 - 13631 ARLES CEDEX	CEA SACLAY Direction de l'énergie Nucléaire Centre de Saclay 91191 GIF SUR YVETTE CEDEX
Section Microstructure et Chimie	Madame MASSE
Dossier n° 06.09.8952 Devis n° DV 9369/BCM54	Réf. : Bon de commande n° 4000266753 / P5B63 du 19.12.2006
	Objet : Caractérisation chimique d'un béton

Echantillon

Nature : Béton de magnétite
Prélevé le : non communiqué
Date de réception : le 19 janvier 2007
Etat à la réception : correct

Transmis par : Ets SOUTRENON

Siège social et laboratoires
23, rue de la Madeleine
BP 60136-13631 Arles cedex
Tél. : 04 90 18 30 30
Fax : 04 90 96 25 27
E-mail : Contact@lerm.fr

WWW.lerm.fr

Agence Ile de France
19, passage Charles Dallery
75011 PARIS
Tél. : 01 43 56 02 04
Fax : 01 43 56 05 09

Ref. LERM	Ref. CEA SACLAY
8952-5	Béton de Magnétite

La reproduction de ce procès verbal d'essai n'est autorisée que sous sa forme intégrale. Il comporte deux pages (recto verso).

Certifié ISO 9001
par l'AFAQ

S.A. à Directoire et Conseil de surveillance au capital de 187 020 €-344 297 775 RCS Arles - APE 742C

Page 1/2

ALARM-TRAN-AIR-SHIELD-001

lerm

METHODES D'ESSAIS

Conformément à la demande, les essais ont été effectués conformément aux textes de référence suivants :

- ▲ Dosage de bore par spectrométrie d'émission à plasma après fusion au carbonate de sodium selon l'instruction LERM IS/LC/E/57 ;
- ▲ dosage de 10 éléments (Si, Al, Fe, Ca, Mg, Ti, Mn, Cr, Sr, P) par spectrométrie d'émission à plasma après fusion au métaborate de lithium et reprise chlorhydrique selon l'instruction LERM IS/LC/E/08;
- ▲ dosage des alcalins par spectrométrie d'émission de flamme après fusion au métaborate de lithium selon l'instruction LERM IS/LC/E/08;
- ▲ analyse thermogravimétrique selon l'instruction LERM IS/LC/E/65 ;
- ▲ dosage des chlorures par potentiométrie selon l'instruction LERM IS/LC/E/25 ;
- ▲ dosage du carbone et de l'hydrogène sur appareil CHN Chromatographique par mesure de conductibilité thermique.

RESULTATS

Les résultats obtenus, exprimés en pourcentage massique, sont regroupés dans le tableau suivant.

Caractéristique mesurée	Valeur (% massique)
Si	2,72
Al	0,52
Fe	54,94
Ca	5,79
Mg	0,56
Ti	0,17
Mn	0,18
P	0,45
Cr	0,03
Sr	0,02
Na	0,22
K	0,28
Cl ⁻	< 0,01
C	0,36
B	< 0,1
H	0,32
Teneur en eau attribuable aux hydrates du liant	1,9

Observations :

Essais réalisés au LERM février 2007

Arles, le 2 mars 2007

Le responsable des essais

Le responsable de la section
Microstructure et Chimie

C. NGWE MOWENI

D. ROSSINI

L'essai faisant l'objet du présent procès verbal d'essais portent sur un (des) échantillon(s) prélevé(s) dans certaines conditions. Sa représentativité est liée à celle (des) de l'échantillon(s) et ne peut être étendue à la population dont il(s) est (sont) issu(s) que si l'homogénéité de cette population peut être vérifiée.
La reproduction de ce procès verbal d'essais n'est autorisée que sous sa forme intégrale.

Procès verbal d'essais.8952/1242.LC

Page 2/2

ALARM-TRAN-AIR-SHIELD-001

ETS SOUTRENON
PREFABRIQUES BETON
Z.A. Les Beluzes
42720 Pouilly Sous Charlieu
Tél. 04 77 69 30 29
Fax 04 77 69 30 25



FORMULATION

BETON MAGNETITE

Quantité par m³ de béton

Gravillon magnétite 0/8 mm : 1.180 kg

Gravillon magnétite 0/20 mm : 2.360 kg

Ciment PM/ES 52,5 : 355 kg

Adjuvant Advaflow 345 : 5 litres

Eau totale : 160 kg

Densité sur éprouvette témoin : 3,90

ALARM-TRAN-AIR-SHIELD-001

H.5 Standard Concrete Analysis



Laboratoire d'Etudes et de
Recherches sur les Matériaux

Procès verbal d'essais.8952/1239.LC

**CARACTERISATION CHIMIQUE
D'UN BETON**

Laboratoire d'essai	Demandeur d'essai
LERM 23, rue de la Madeleine BP 60136 - 13631 ARLES CEDEX	CEA SACLAY Direction de l'énergie Nucléaire Centre de Saclay 91191 GIF SUR YVETTE CEDEX
Section Microstructure et Chimie	Madame MASSE
Dossier n° 06.09.8952 Devis n° DV 9369/BCM54	Réf. : Bon de commande n° 4000266753 / P5B63 du 19.12.2006
	Objet : Caractérisation chimique d'un béton

Echantillon

Siège social et laboratoires
23, rue de la Madeleine
BP 60136-13631 Arles cedex
Tél.: 04 90 18 30 30
Fax: 04 90 96 25 27
E-mail: Contact@lerm.fr

WWW.lerm.fr

Agence Ile de France
19, passage Charles Dallery
75011 PARIS
Tél.: 01 43 56 02 04
Fax: 01 43 56 05 09

Nature : Béton
Prélevé le : non communiqué
Date de réception : le 19 janvier 2007
Etat à la réception : correct

Transmis par : Ets SOUTRENON

Ref. LERM	Ref. CEA SACLAY
8952-2	Béton Traditionnel Avec adjuvant

La reproduction de ce proces verbal d'essai n'est autorisée que sous sa forme intégrale. Il comporte deux pages (recto verso).

Certifié ISO 9001
par l'AFAQ

S.A. à Directoire et Conseil de surveillance au capital de 187 020 €- 344 297 775 RCS Arles - APE 742C

Page 1/2

ALARM-TRAN-AIR-SHIELD-001

lerm

METHODES D'ESSAIS

Conformément à la demande, les essais ont été effectués conformément aux textes de référence suivants :

- ▲ Dosage de bore par spectrométrie d'émission à plasma après fusion au carbonate de sodium selon l'instruction LERM IS/LC/E/57 ;
- ▲ dosage de 10 éléments (Si, Al, Fe, Ca, Mg, Ti, Mn, Cr, Sr, P) par spectrométrie d'émission à plasma après fusion au métaborate de lithium et reprise chlorhydrique selon l'instruction LERM IS/LC/E/08;
- ▲ dosage des alcalins par spectrométrie d'émission de flamme après fusion au métaborate de lithium selon l'instruction LERM IS/LC/E/08;
- ▲ analyse thermogravimétrique selon l'instruction LERM IS/LC/E/65 ;
- ▲ dosage des chlorures par potentiométrie selon l'instruction LERM IS/LC/E/25 ;
- ▲ dosage du carbone et de l'hydrogène sur appareil CHN Chromatographique par mesure de conductibilité thermique.

RESULTATS

Les résultats obtenus, exprimés en pourcentage massique, sont regroupés dans le tableau suivant.

Caractéristique mesurée	Valeur (% massique)
Si	27,02
Al	6,04
Fe	1,99
Ca	8,67
Mg	0,75
Ti	0,23
Mn	0,04
P	0,10
Cr	0,01
Sr	0,03
Na	1,57
K	3,32
Cl	< 0,01
C	0,62
B	< 0,1
H	0,64
Teneur en eau attribuable aux hydrates du liant	5,0

Observations :

Essais réalisés au LERM en février 2007

Arles, le 2 mars 2007

Le responsable des essais

Le responsable de la section
Microstructure et Chimie

C. NGWE MOWENI

D. ROSSINI

*L'essai faisant l'objet du présent procès verbal d'essais portent sur un (des) échantillon(s) prélevé(s) dans certaines conditions. Sa représentativité est liée à celle (des) de l'échantillon(s) et ne peut être étendue à la population dont il(s) est (sont) issu(s) que si l'homogénéité de cette population peut être vérifiée.
La reproduction de ce procès verbal d'essais n'est autorisée que sous sa forme intégrale.
Procès verbal d'essais 8952/1239.LC*

Page 2/2

ALARM-TRAN-AIR-SHIELD-001

ETS SOUTRENON
PREFABRIQUES BETON
Z.A. Les Beluzes
42720 Pouilly Sous Charlieu
Tél. 04 77 69 30 29
Fax 04 77 69 30 25



FORMULATION

BETON TRADITIONNEL

Quantité par m³ de béton

Sable 0/4 mm :	861 kg
Gravillon 4/10 mm :	306 kg
Gravillon 10/20 mm :	645 kg
Ciment PM/ES 52,5 :	355 kg
Adjuvant Advaflow 345 :	2,5 litres
Eau totale :	190 kg

Densité sur éprouvette témoin : 2,30

ALARM-TRAN-AIR-SHIELD-001

H.6 Uranyl Nitrate Enrichment Analysis

DTMN/SAD/LCA

Bt 118

**ANALYSE ISOTOPIQUE
DE L'URANIUM
PAR SMTI**

Client : Mr J. LEGENDRE - SRSC/Bt 010

Nom de l'échantillon : R103

URANIUM

Unité des résultats : Atomes %

^{234}U : 0,5891 +/- 0,0010
 ^{235}U : 92,6857 +/- 0,0200
 ^{236}U : 0,2519 +/- 0,0010
 ^{238}U : 6,4733 +/- 0,0050

*H. chabot / le 17/04/1995
Vraint transmis*

Pourcentage en isotopes :
 ^{235}U : 92,6105 %

ALARM-TRAN-AIR-SHIELD-001

H.7 Uranyl Nitrate Concentration, Density, and Molarity Analysis

VA / DRMN / SRNC / LM2SI	1-687	mardi 18 janv 2011									
ANALYSE URANIUM											
Description de l'échantillon											
Numéro échantillon		Motif Analyse	Date Prélèvement	Date Analyse							
1-687		vérification	06/09/2010	08/09/2010							
Gravimétrie (Extrait sec)											
Constantes	Masses Molaires	$M_{U_3O_8} = 833,705 \text{ g / mole}$	$3M_U = 705,705 \text{ g / mole}$								
Creuset n°	masse Creuset vide (g)	masse Creuset + U_3O_8 (g)	masse U_3O_8 (g)	masse U (g)	masse Flacon C.G. plein (g)	masse Flacon C.G. - P.E. (g)	prise d'essai (g)	Concentration massique en U_{total} (g / kg)	Volume (mL)	Concentration volumique en U_{total} (g / L)	
n°11	29,1973	29,4682	0,2709	0,2293	34,9862	31,2227	3,7635	60,9295	52,70	70,45	
n°12	29,0133	29,2442	0,2309	0,1954	31,2227	28,0097	3,2130	60,8309	52,61	70,34	
n°16	31,7850	32,0344	0,2494	0,2111	28,0097	24,5376	3,4721	60,8016	52,59	70,30	
Concentration Vol. Moyenne	[U_{total}] moy en g / L	70,36 g/L	Incertitude méthode M. NEUILLY	$S_{[U_{total}]}$ moy en g / L	± 0,05 g/L						
Densimétrie à 20°C											
mesure 1 ρ_1 (g / cm³)	mesure 2 ρ_2 (g / cm³)	mesure 3 ρ_3 (g / cm³)	mesure 4 ρ_4 (g / cm³)	densité Moyenne ρ_{moy} en g / cm³			Incertitude méthode M. NEUILLY $S_{\rho_{moy}}$ en g / cm³				
1,15615	1,15626	1,15628	1,15627	1,15624 g/cm³			± 0,00003 g/cm³				
Acidité											
Bécher n°	masse Flacon C.G. plein (g)	masse Flacon C.G. - P.E. (g)	prise d'essai (g)	Volume (mL)	Volume NaOH (mL)	Molarité en NO_3^- (moles / L)	Molarité en H^+ (moles / L)				
n°1	24,5355	23,8087	0,7268	0,6286	1,59	2,53	1,93				
n°2	23,8087	22,7931	1,0156	0,8784	2,18	2,48	1,88				
Molarité Moyenne en NO_3^-	[NO_3^-] moy en mol / L	2,51 moles/L	Incertitude méthode M. NEUILLY	$S_{[NO_3^-]}$ moy en mol / L	± 0,03 moles/L						
Molarité Moyenne en H^+	[H^+] moy en mol / L	1,91 moles/L	Incertitude méthode M. NEUILLY	$S_{[H^+]}$ moy en mol / L	± 0,03 moles/L						
Validité de l'analyse											
Test Empirique :	1,157		Test :								
pmoy	1,156		OK								

ALARM-TRAN-AIR-SHIELD-001

H.8 Calibration and Operation Characteristics of SILENE

Caractéristique		Configuration Sans écran	Configuration Ecran Acier	Configuration Ecran Plomb	Configuration Ecran CH ₂
Du cœur	Concentration de la solution d'acidité 2N, en U total Température d'Ebul. Hauteur Critique Réactivité du mm de solution Temps de vie des neutrons prompts Valeur de, β_{eff} Coefficient de température	$71 \pm 1 \text{ g L}^{-1}$ $104 \text{ }^{\circ}\text{C}$ $37,77 \pm 0,56 \text{ cm}$ 50 pcm mm^{-1} $36 \mu\text{s}$ 794 pcm $-51 \text{ pcm }^{\circ}\text{C}^{-1}$	$71 \pm 1 \text{ g L}^{-1}$ $104 \text{ }^{\circ}\text{C}$ $32,5 \pm 0,5 \text{ cm}$ 72 pcm mm^{-1} $35 \mu\text{s}$ 792 pcm $-40 \text{ pcm }^{\circ}\text{C}^{-1}$	$71 \pm 1 \text{ g L}^{-1}$ $104 \text{ }^{\circ}\text{C}$ $31,44 \pm 0,27 \text{ cm}$ 81 pcm mm^{-1} $37 \mu\text{s}$ 783 pcm $-42 \text{ pcm }^{\circ}\text{C}^{-1}$	$71 \pm 1 \text{ g L}^{-1}$ $104 \text{ }^{\circ}\text{C}$ $34,56 \pm 0,3 \text{ cm}$ 60 pcm mm^{-1} $35 \mu\text{s}$ 788 pcm $-44 \text{ pcm }^{\circ}\text{C}^{-1}$
Des barres de contrôle	Antiréactivité barre B4C Antiréactivité barre Cd à vis	4560 pcm 3220 pcm	4080 pcm 2880 pcm	4040 pcm 2820 pcm	4550 pcm 3230 pcm
Des modes de fonctionnement	<u>Salve</u> (sans source externe) Vitesse d'introduction de réactivité Cd rapide Réactivité potentielle ΔK_p Energie intégrée sous le 1 ^{er} pic Energie intégrée si évolution Puissance maximum Temps de doublement Onde de pression <u>Libre évolution</u> (avec source externe) Vitesse d'introduction de réactivité b4C Cd à vis Réactivité potentielle ΔK_p Energie intégrée	$\sim 2,00 \text{ ms}^{-1}$ $\leq 2370 \text{ pcm}$ $\leq 1,65 \cdot 10^{17} \text{ fis}$ $< 3 \cdot 10^{17} \text{ fis}$ $\leq 2,9 \cdot 10^{19} \text{ fis.s}^{-1}$ $\geq 1,6 \cdot 10^{-3} \text{ s}$ $\leq 8 \text{ bars}$	$\sim 2,00 \text{ ms}^{-1}$ $\leq 2570 \text{ pcm}$ $\leq 1,65 \cdot 10^{17} \text{ fis}$ $< 3,1 \cdot 10^{17} \text{ fis}$ $\leq 3,5 \cdot 10^{19} \text{ fis.s}^{-1}$ $\geq 1,5 \cdot 10^{-3} \text{ s}$ $\leq 8 \text{ bars}$	$\sim 2,00 \text{ ms}^{-1}$ $\leq 2780 \text{ pcm}$ $\leq 1,65 \cdot 10^{17} \text{ fis}$ $< 3,6 \cdot 10^{17} \text{ fis}$ $\leq 3,55 \cdot 10^{19} \text{ fis.s}^{-1}$ $\geq 1,3 \cdot 10^{-3} \text{ s}$ $\leq 8 \text{ bars}$	$\sim 2,00 \text{ ms}^{-1}$ $\leq 2480 \text{ pcm}$ $\leq 1,9 \cdot 10^{17} \text{ fis}$ $< 3,8 \cdot 10^{17} \text{ fis}$ $\leq 3,6 \cdot 10^{19} \text{ fis.s}^{-1}$ $\geq 1,4 \cdot 10^{-3} \text{ s}$ $\leq 8 \text{ bars}$
	Palier : (avec source externe) Vitesse d'introduction de réactivité B4C Cd à vis Réactivité potentielle ΔK_p Puissance Energie intégrée	$\sim 1 \text{ mm.s}^{-1}$ $\sim 1 \text{ mm.s}^{-1}$ $\leq 4200 \text{ pcm}$ $< 5 \cdot 10^{17} \text{ fis}$	$\sim 1 \text{ mm.s}^{-1}$ $\sim 1 \text{ mm.s}^{-1}$ $\leq 3120 \text{ pcm}$ $< 4,1 \cdot 10^{17} \text{ fis}$	$\sim 1 \text{ mm.s}^{-1}$ $\sim 1 \text{ mm.s}^{-1}$ $\leq 3300 \text{ pcm}$ $< 4 \cdot 10^{17} \text{ fis}$	$\sim 1 \text{ mm.s}^{-1}$ $\sim 1 \text{ mm.s}^{-1}$ $\leq 3380 \text{ pcm}$ $\leq 10 \text{ Kw}$ $\leq 5 \cdot 10^{17} \text{ fis}$
Thermique	Relation échauffement fission	$1,35 \cdot 10^{11} \text{ fis.cal}^{-1}$	$1,42 \cdot 10^{11} \text{ fis.cal}^{-1}$	$1,43 \cdot 10^{11} \text{ fis.cal}^{-1}$	$1,69 \cdot 10^{11} \text{ fis.cal}^{-1}$
Sécurité	Energie intégrée (CAF) Puissance pendant montée solution	$5 \cdot 10^{17} \text{ fis}$ 10 watts	$4 \cdot 10^{17} \text{ fis}$ 13 watts	$4 \cdot 10^{17} \text{ fis}$ 13 watts	$5 \cdot 10^{17} \text{ fis}$ 60 watts

ALARM-TRAN-AIR-SHIELD-001

APPENDIX I: UNCERTAINTY ANALYSIS DETAILS

The tables in this appendix provide the details of the sensitivity / uncertainty analysis. The tables include the parameters being evaluated (including units), each parameter's uncertainty (σ_i), the absolute sensitivity of the detector response to that parameter (S_i^d), and the detector response uncertainty due to each parameter's uncertainty (σ_i^d). The total experimental uncertainty for each detector (σ_{tot}^d) is the sum in quadrature of the uncertainty due to the individual parameters, so all the parameters are assumed to be uncorrelated.

The units of the neutron measurements are Bq/g and for the TLD doses are Gy, which are also the units of the detector response uncertainties (σ_i^d and σ_{tot}^d). The units of the absolute sensitivities (S_i^d) in the following tables are Bq/g or Gy, depending on the type of measurement, per the units of the parameter being evaluated (σ_i). For example, the absolute sensitivity of the TLD dose to the solution height in SILENE has units of Gy/cm.

Discussion of the derivation of the individual parameter uncertainties is in Sect. 2.0. The equations given in Sect. 2.0 to calculate the data in the following tables are repeated here for the convenience of the reader. It is very important to note that the sensitivity values given in the following tables are absolute, not relative. These absolute sensitivities are simply the derivative of the detector response with respect to the given parameter.

$$S_i^d = \frac{\Delta d}{\Delta x_i} \quad \sigma_i^d = S_i^d * \sigma_i \quad \sigma_{tot}^d = \sqrt{\sum_i (\sigma_i^d)^2}$$

One must pay close attention to the value of the measured response (Table 1-26 and Table 1-27) and the individual parameter uncertainty in order to make a judgement about the magnitude of each absolute sensitivity. For example, if an absolute sensitivity for a parameter is 1.0e6 and the measured value is 1.0e8, then this parameter likely will not make a large contribution to the total experimental uncertainty. However, that is dependent on the individual parameter uncertainty. For another example, assume the absolute sensitivity to a parameter is 1.0e8 and the measured value is 1.0e6. If this individual parameter has an uncertainty of 1.0e-4, this parameter likely will not make a large contribution to the total experimental uncertainty even though the sensitivity is larger than the measured value.

The uncertainty of the absolute sensitivity values in the following tables are relative uncertainties between 0 and 1. For many of the parameters analyzed, the reported absolute sensitivity relative uncertainty is >0.50. In other words, the absolute sensitivity relative uncertainty is greater than 50%. This indicates a parameter that was perturbed, but the Monte Carlo results of the original case and the perturbations are not statistically different with all Monte Carlo uncertainties less than 1 percent. While it is possible to reduce the Monte Carlo uncertainties of these simulations, this has not been pursued because the resulting absolute sensitivity and contribution to the total experimental uncertainty would likely be negligible.

Below are two examples that illustrate how the absolute sensitivities in the following tables were calculated. In most instances the nominal value of the parameter in the benchmark model being evaluated was perturbed plus and minus some percentage of the nominal value. Then the simulated response was calculated with the perturbed parameter values. Next, a line was fit to the simulated response data points as a function of the parameter being evaluated via a linear least squares algorithm. The slope of this line and its uncertainty were taken as the absolute sensitivity and the uncertainty of the sensitivity. If the results of the simulations with the perturbed values are statistically the same as the simulation with the nominal value, i.e., the difference is

ALARM-TRAN-AIR-SHIELD-001

statistically indistinguishable from zero, then the uncertainty contribution of that parameter to the total experimental uncertainty is assumed to be negligible.

The first example evaluates the absolute sensitivity of the cobalt activity to the density of the stainless steel used to construct the SILENE critical assembly. One can see in Table I-1 that the simulated response for each perturbation is statistically different from the nominal case. In Fig. I-1 one can see that the absolute sensitivity for this example is -1.0044. Note, this example is just an illustration and does not apply exactly to this benchmark.

Table I-1. Results of Steel Density Perturbation Simulations

Steel Density (g/cm ³)	Response (Bq/g)	Relative Uncertainty	Response Delta	Response Delta Uncertainty
7.505	74.8805	0.0012		
7.9	74.4776	0.0012	0.4029	0.1267
8.295	74.087	0.0012	0.3906	0.1261

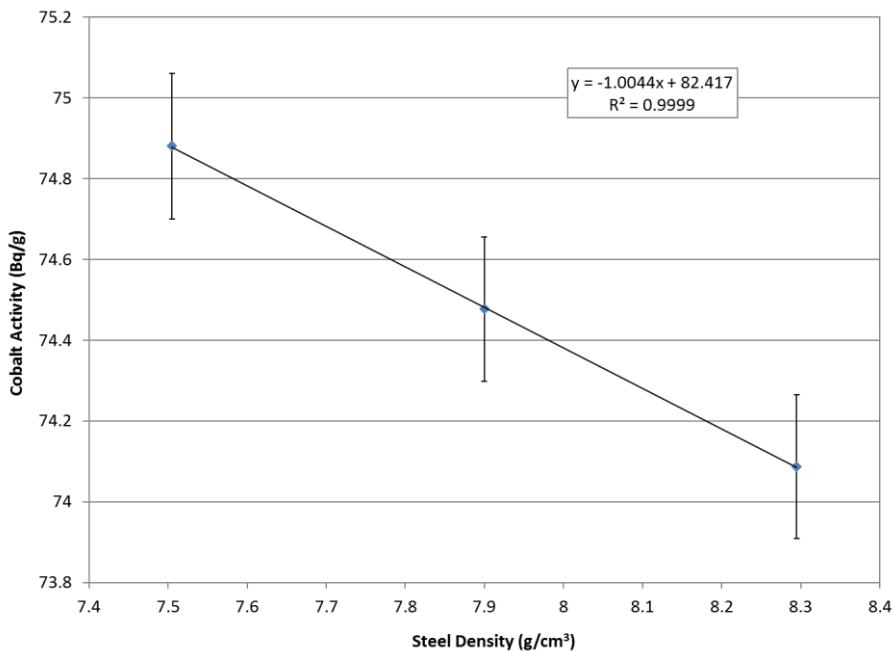


Fig. I-1. Cobalt Activity vs. SILENE Reactor Steel Density (2-sigma error bars).

The second example evaluates the absolute sensitivity of the cobalt activity to the chromium weight fraction (wf) of the stainless steel used to construct the SILENE critical assembly. One can see in Table I-2 that the simulated response for each perturbation is *not* statistically different from the nominal case. This is also illustrated by comparing the differences in the calculated responses (response delta, which is the difference between the nominal response and the perturbed response) and the related uncertainties. The response delta uncertainties are actually larger than the response deltas. In Fig. I-2 one can see that the absolute sensitivity for this example is -2.355, but this sensitivity is considered negligible because the perturbations did not produce statistically different results. Note, this example is just an illustration and does not apply exactly to this benchmark.

ALARM-TRAN-AIR-SHIELD-001

Table I-2. Results of Steel Cr Weight Fraction Perturbation Simulations

Steel Density (g/cm ³)	Response (Bq/g)	Relative Uncertainty	Response Delta	Response Delta Uncertainty
0.17	74.4684	0.0012		
0.18	74.4776	0.0012	-0.0092	0.1264
0.19	74.4213	0.0012	0.0563	0.1263

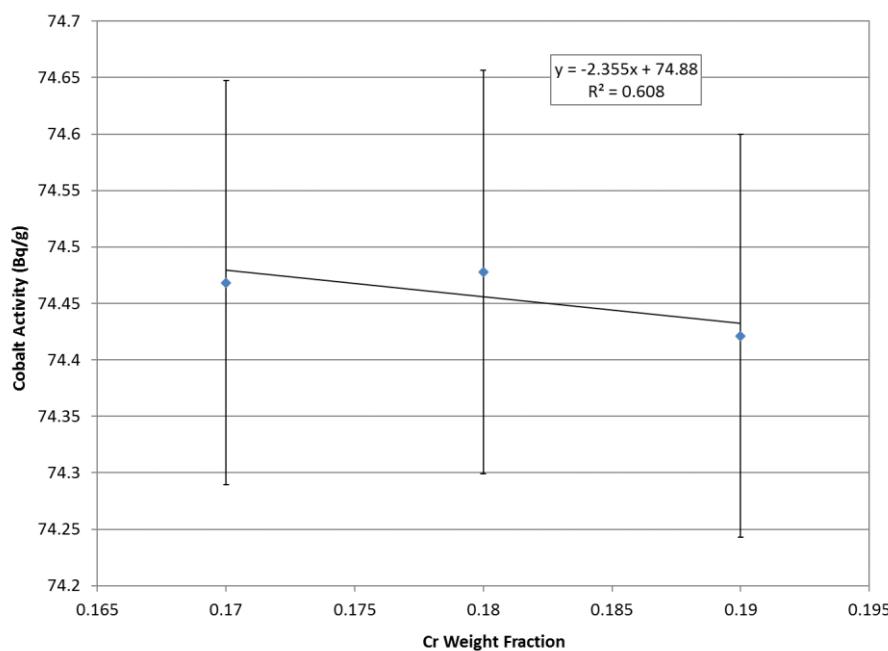


Fig. I-2. Cobalt Activity vs. Cr Weight Fraction of SILENE Reactor Steel (2-sigma error bars).

ALARM-TRAN-AIR-SHIELD-001

I.1 Case 1 Collimator A Uncertainties

Table I-3. Case 1 Collimator A $^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.286%			8.500E-01
Number of fissions	6.000%			3.966E+00
SILENE room concrete density (g/cm ³)	2.000E-01	-7.535E-03	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	3.744E+02	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	3.490E+07	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.321E+01	0.0802	-3.813E-01
SILENE assembly wall density (g/cm ³)	4.500E-01	-9.899E-01	0.2165	-4.454E-01
SILENE assembly wall Cr content (wf)	5.774E-03	3.958E+00	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-1.081E+00	>0.50	negligible
Critical height (cm)	5.000E-04	-2.299E-01	0.0442	-1.149E-04
Solution concentration (g/L)	5.000E-02	-6.556E-01	0.4305	-3.278E-02
Solution density (g/cm ³)	5.456E-03	-5.485E+01	0.1375	-2.992E-01
Solution uranium enrichment (wf)	1.500E-05	-2.139E-01	0.0856	-3.209E-06
Solution temperature (deg C)	7.861E+00	7.792E-02	>0.50	negligible
Collimator A inner stainless steel thickness (cm)	2.887E-02	6.308E+00	0.3360	1.821E-01
Collimator A inner stainless steel density (g/cm ³)	3.900E-01	2.191E-02	>0.50	negligible
Collimator A inner stainless steel Cr content (wf)	5.774E-03	-7.621E+00	>0.50	negligible
Collimator A inner stainless steel Ni content (wf)	5.774E-03	3.138E+00	>0.50	negligible
Collimator A copper thickness (cm)	2.887E-02	-1.363E+01	0.0622	-3.935E-01
Collimator A copper density (g/cm ³)	4.600E-01	-4.693E-01	0.4043	-2.159E-01
Collimator A lead thickness (cm)	2.887E-02	1.683E+00	0.2515	4.857E-02
Collimator A lead density (g/cm ³)	1.720E-01	8.275E-02	>0.50	negligible
Collimator A PPB9 density (g/cm ³)	6.282E-02	8.695E+00	0.0796	5.462E-01
Collimator A PPB9 H content (wf)	1.744E-03	8.126E+01	0.2798	1.417E-01
Collimator A PPB9 B content (wf)	6.158E-04	-8.793E+02	0.1721	-5.415E-01
Collimator A X position in room (cm)	1.000E+00	-5.194E-01	0.0324	-5.194E-01
Collimator A Y position in room (cm)	1.000E+00	-1.155E+00	>0.50	negligible
Collimator A Z position in room (cm)	1.000E+00	-1.052E-01	0.2218	-1.052E-01
Collimator A foil holder base thickness (cm)	2.887E-02	1.845E-01	>0.50	negligible
Collimator A foil holder base density (g/cm ³)	3.425E-01	3.763E-02	>0.50	negligible
Collimator A foil holder base Mg content (wf)	2.887E-03	5.602E-01	>0.50	negligible
Collimator A foil back plate thickness (cm)	2.887E-02	-4.603E-01	>0.50	negligible
Collimator A foil back plate density (g/cm ³)	3.425E-01	1.043E-02	>0.50	negligible
Collimator A foil back plate Mg content (wf)	2.887E-03	3.100E-01	>0.50	negligible
Collimator A foil cover thickness (cm)	2.887E-02	-2.318E+00	>0.50	negligible
Collimator A foil cover density (g/cm ³)	3.425E-01	-4.060E-02	>0.50	negligible
Collimator A foil cover Mg content (wf)	2.887E-03	3.340E+00	>0.50	negligible
Collimator A Co foil thickness (cm)	1.155E-02	-9.856E+01	0.0445	-1.138E+00
Collimator A Co foil radius (cm)	1.443E-02	-4.405E+00	>0.50	negligible
Collimator A Co foil mass (g)	1.163E-02	-2.359E+00	0.0778	-2.743E-02
Total experimental uncertainty absolute (σ_{tot}^d)				4.394E+00
Total experimental uncertainty relative				0.0665

ALARM-TRAN-AIR-SHIELD-001

Table I-4. Case 1 Collimator A $^{115}\text{In}(\text{n},\gamma)^{116}\text{In}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.921%			1.750E+05
Number of fissions	6.000%			5.466E+05
SILENE room concrete density (g/cm ³)	2.000E-01	-7.535E-03	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	5.135E+07	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-2.715E+10	0.4193	-1.480E+04
SILENE assembly wall thickness (cm)	2.887E-02	-1.765E+06	0.0945	-5.095E+04
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.267E+05	0.2701	-5.702E+04
SILENE assembly wall Cr content (wf)	5.774E-03	-5.538E+05	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-3.037E+05	>0.50	negligible
Critical height (cm)	5.000E-04	-3.446E+04	0.0467	-1.723E+01
Solution concentration (g/L)	5.000E-02	-1.303E+05	0.3415	-6.515E+03
Solution density (g/cm ³)	5.456E-03	-1.321E+07	0.0880	-7.207E+04
Solution uranium enrichment (wf)	1.500E-05	-2.165E+04	0.1331	-3.248E-01
Solution temperature (deg C)	7.861E+00	9.108E+03	>0.50	negligible
Collimator A inner stainless steel thickness (cm)	2.887E-02	4.478E+05	>0.50	negligible
Collimator A inner stainless steel density (g/cm ³)	3.900E-01	2.335E+03	>0.50	negligible
Collimator A inner stainless steel Cr content (wf)	5.774E-03	8.546E+05	>0.50	negligible
Collimator A inner stainless steel Ni content (wf)	5.774E-03	7.592E+04	>0.50	negligible
Collimator A copper thickness (cm)	2.887E-02	-1.461E+06	0.0915	-4.216E+04
Collimator A copper density (g/cm ³)	4.600E-01	-6.738E+04	0.4438	-3.100E+04
Collimator A lead thickness (cm)	2.887E-02	2.889E+05	0.2309	8.341E+03
Collimator A lead density (g/cm ³)	1.720E-01	-6.415E+03	>0.50	negligible
Collimator A PPB9 density (g/cm ³)	6.282E-02	1.059E+06	0.1029	6.651E+04
Collimator A PPB9 H content (wf)	1.744E-03	8.143E+06	0.4397	1.420E+04
Collimator A PPB9 B content (wf)	6.158E-04	-1.293E+08	0.1842	-7.964E+04
Collimator A X position in room (cm)	1.000E+00	-7.034E+04	0.0380	-7.034E+04
Collimator A Y position in room (cm)	1.000E+00	-1.261E+05	>0.50	negligible
Collimator A Z position in room (cm)	1.000E+00	-9.739E+03	0.4057	-9.739E+03
Collimator A foil holder base thickness (cm)	2.887E-02	-1.252E+05	>0.50	negligible
Collimator A foil holder base density (g/cm ³)	3.425E-01	-2.244E+04	>0.50	negligible
Collimator A foil holder base Mg content (wf)	2.887E-03	-2.631E+05	>0.50	negligible
Collimator A foil back plate thickness (cm)	2.887E-02	-2.566E+05	>0.50	negligible
Collimator A foil back plate density (g/cm ³)	3.425E-01	-5.736E+03	>0.50	negligible
Collimator A foil back plate Mg content (wf)	2.887E-03	-1.070E+05	>0.50	negligible
Collimator A foil cover thickness (cm)	2.887E-02	-2.067E+05	>0.50	negligible
Collimator A foil cover density (g/cm ³)	3.425E-01	8.156E+03	>0.50	negligible
Collimator A foil cover Mg content (wf)	2.887E-03	2.910E+05	>0.50	negligible
Collimator A In foil thickness (cm)	5.773E-03	-4.091E+07	0.0327	-2.362E+05
Collimator A In foil radius (cm)	1.443E-02	-1.810E+05	>0.50	negligible
Collimator A In foil mass (g)	4.656E-03	-5.896E+05	0.0611	-2.745E+03
Total experimental uncertainty absolute (σ_{tot}^d)				6.444E+05
Total experimental uncertainty relative				0.0707

ALARM-TRAN-AIR-SHIELD-001

Table I-5. Case 1 Collimator A $^{115}\text{In}(n,n'\gamma)^{115m}\text{In}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.557%			1.250E+02
Number of fissions	6.000%			4.818E+02
SILENE room concrete density (g/cm ³)	2.000E-01	-4.543E+00	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-2.114E+04	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	3.511E+08	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.086E+03	0.1438	-3.134E+01
SILENE assembly wall density (g/cm ³)	4.500E-01	-9.124E+01	0.3477	-4.106E+01
SILENE assembly wall Cr content (wf)	5.774E-03	2.151E+01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-3.151E+02	>0.50	negligible
Critical height (cm)	5.000E-04	-1.319E+01	0.1143	-6.594E-03
Solution concentration (g/L)	5.000E-02	-1.832E+01	>0.50	negligible
Solution density (g/cm ³)	5.456E-03	-7.753E+03	0.1438	-4.230E+01
Solution uranium enrichment (wf)	1.500E-05	-8.522E-01	>0.50	negligible
Solution temperature (deg C)	7.861E+00	6.913E+00	>0.50	negligible
Collimator A inner stainless steel thickness (cm)	2.887E-02	2.431E+02	>0.50	negligible
Collimator A inner stainless steel density (g/cm ³)	3.900E-01	-3.447E+00	>0.50	negligible
Collimator A inner stainless steel Cr content (wf)	5.774E-03	4.913E+02	>0.50	negligible
Collimator A inner stainless steel Ni content (wf)	5.774E-03	2.589E+02	>0.50	negligible
Collimator A copper thickness (cm)	2.887E-02	-2.193E+02	>0.50	negligible
Collimator A copper density (g/cm ³)	4.600E-01	2.952E+01	>0.50	negligible
Collimator A lead thickness (cm)	2.887E-02	3.522E+02	0.1771	1.017E+01
Collimator A lead density (g/cm ³)	1.720E-01	3.537E+01	>0.50	negligible
Collimator A PPB9 density (g/cm ³)	6.282E-02	-3.364E+02	0.2996	-2.113E+01
Collimator A PPB9 H content (wf)	1.744E-03	-4.533E+03	>0.50	negligible
Collimator A PPB9 B content (wf)	6.158E-04	1.253E+04	>0.50	negligible
Collimator A X position in room (cm)	1.000E+00	-5.784E+01	0.0353	-5.784E+01
Collimator A Y position in room (cm)	1.000E+00	2.139E+02	>0.50	negligible
Collimator A Z position in room (cm)	1.000E+00	-6.534E+00	>0.50	negligible
Collimator A foil holder base thickness (cm)	2.887E-02	2.142E+02	>0.50	negligible
Collimator A foil holder base density (g/cm ³)	3.425E-01	6.276E+01	>0.50	negligible
Collimator A foil holder base Mg content (wf)	2.887E-03	-3.330E+02	>0.50	negligible
Collimator A foil back plate thickness (cm)	2.887E-02	4.500E+01	>0.50	negligible
Collimator A foil back plate density (g/cm ³)	3.425E-01	1.862E+00	>0.50	negligible
Collimator A foil back plate Mg content (wf)	2.887E-03	1.300E+01	>0.50	negligible
Collimator A foil cover thickness (cm)	2.887E-02	3.915E+02	>0.50	negligible
Collimator A foil cover density (g/cm ³)	3.425E-01	2.559E+01	>0.50	negligible
Collimator A foil cover Mg content (wf)	2.887E-03	-4.801E+01	>0.50	negligible
Collimator A In foil thickness (cm)	5.773E-03	-1.015E+02	>0.50	negligible
Collimator A In foil radius (cm)	1.443E-02	2.350E+01	>0.50	negligible
Collimator A In foil mass (g)	4.656E-03	5.805E-01	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				5.061E+02
Total experimental uncertainty relative				0.0630

ALARM-TRAN-AIR-SHIELD-001

Table I-6. Case 1 Collimator A $^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.988%			4.100E-03
Number of fissions	6.000%			1.237E-02
SILENE room concrete density (g/cm ³)	2.000E-01	7.494E-04	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-3.977E-01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-2.124E+03	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-2.676E-02	0.1384	-7.724E-04
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.543E-03	0.4860	-6.944E-04
SILENE assembly wall Cr content (wf)	5.774E-03	-2.549E-03	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	2.700E-03	>0.50	negligible
Critical height (cm)	5.000E-04	-2.221E-04	0.1610	-1.111E-07
Solution concentration (g/L)	5.000E-02	-1.200E-04	>0.50	negligible
Solution density (g/cm ³)	5.456E-03	-1.795E-01	0.1432	-9.795E-04
Solution uranium enrichment (wf)	1.500E-05	2.234E-05	>0.50	negligible
Solution temperature (deg C)	7.861E+00	2.113E-04	>0.50	negligible
Collimator A inner stainless steel thickness (cm)	2.887E-02	3.160E-03	>0.50	negligible
Collimator A inner stainless steel density (g/cm ³)	3.900E-01	-3.148E-04	>0.50	negligible
Collimator A inner stainless steel Cr content (wf)	5.774E-03	5.351E-03	>0.50	negligible
Collimator A inner stainless steel Ni content (wf)	5.774E-03	-1.235E-04	>0.50	negligible
Collimator A copper thickness (cm)	2.887E-02	-1.335E-03	>0.50	negligible
Collimator A copper density (g/cm ³)	4.600E-01	-3.259E-04	>0.50	negligible
Collimator A lead thickness (cm)	2.887E-02	3.885E-03	0.3814	1.122E-04
Collimator A lead density (g/cm ³)	1.720E-01	3.188E-04	>0.50	negligible
Collimator A PPB9 density (g/cm ³)	6.282E-02	-5.190E-03	0.4474	-3.260E-04
Collimator A PPB9 H content (wf)	1.744E-03	-9.019E-02	>0.50	negligible
Collimator A PPB9 B content (wf)	6.158E-04	-8.748E-02	>0.50	negligible
Collimator A X position in room (cm)	1.000E+00	-1.650E-03	0.0277	-1.650E-03
Collimator A Y position in room (cm)	1.000E+00	1.659E-03	>0.50	negligible
Collimator A Z position in room (cm)	1.000E+00	-1.222E-04	>0.50	negligible
Collimator A foil holder base thickness (cm)	2.887E-02	1.107E-03	>0.50	negligible
Collimator A foil holder base density (g/cm ³)	3.425E-01	4.208E-04	>0.50	negligible
Collimator A foil holder base Mg content (wf)	2.887E-03	-1.300E-03	>0.50	negligible
Collimator A foil back plate thickness (cm)	2.887E-02	-2.800E-03	>0.50	negligible
Collimator A foil back plate density (g/cm ³)	3.425E-01	-1.303E-04	>0.50	negligible
Collimator A foil back plate Mg content (wf)	2.887E-03	1.651E-15	>0.50	negligible
Collimator A foil cover thickness (cm)	2.887E-02	-6.333E-04	>0.50	negligible
Collimator A foil cover density (g/cm ³)	3.425E-01	-3.351E-05	>0.50	negligible
Collimator A foil cover Mg content (wf)	2.887E-03	-8.000E-04	>0.50	negligible
Collimator A Fe foil thickness (cm)	5.773E-03	-7.172E-03	0.0173	-4.140E-05
Collimator A Fe foil radius (cm)	1.443E-02	2.200E-03	>0.50	negligible
Collimator A Fe foil mass (g)	4.656E-03	-1.684E-04	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.320E-02
Total experimental uncertainty relative				0.0640

ALARM-TRAN-AIR-SHIELD-001

Table I-7. Case 1 Collimator A $^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn}$ + $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity Value (S_i^d)	Unc	σ_i^d
Measurement uncertainty	1.320%			3.050E+01
Number of fissions	6.000%			1.386E+02
SILENE room concrete density (g/cm ³)	2.000E-01	2.434E+00	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	7.339E+03	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	1.022E+09	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-4.831E+02	0.0968	-1.395E+01
SILENE assembly wall density (g/cm ³)	4.500E-01	-3.297E+01	0.2890	-1.484E+01
SILENE assembly wall Cr content (wf)	5.774E-03	1.708E+02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-3.085E+02	>0.50	negligible
Critical height (cm)	5.000E-04	-7.749E+00	0.0582	-3.875E-03
Solution concentration (g/L)	5.000E-02	-2.905E+01	0.4304	-1.452E+00
Solution density (g/cm ³)	5.456E-03	-2.394E+03	0.1393	-1.306E+01
Solution uranium enrichment (wf)	1.500E-05	-7.629E+00	0.1058	-1.144E-04
Solution temperature (deg C)	7.861E+00	8.367E-01	>0.50	negligible
Collimator A inner stainless steel thickness (cm)	2.887E-02	1.873E+02	0.4997	5.407E+00
Collimator A inner stainless steel density (g/cm ³)	3.900E-01	-1.258E+01	>0.50	negligible
Collimator A inner stainless steel Cr content (wf)	5.774E-03	-2.107E+02	>0.50	negligible
Collimator A inner stainless steel Ni content (wf)	5.774E-03	-1.635E+02	>0.50	negligible
Collimator A copper thickness (cm)	2.887E-02	-3.514E+02	0.1043	-1.014E+01
Collimator A copper density (g/cm ³)	4.600E-01	-1.520E+01	>0.50	negligible
Collimator A lead thickness (cm)	2.887E-02	6.602E+01	0.2830	1.906E+00
Collimator A lead density (g/cm ³)	1.720E-01	2.912E+00	>0.50	negligible
Collimator A PPB9 density (g/cm ³)	6.282E-02	3.246E+02	0.0943	2.039E+01
Collimator A PPB9 H content (wf)	1.744E-03	1.148E+03	>0.50	negligible
Collimator A PPB9 B content (wf)	6.158E-04	-3.506E+04	0.1859	-2.159E+01
Collimator A X position in room (cm)	1.000E+00	-1.682E+01	0.0401	-1.682E+01
Collimator A Y position in room (cm)	1.000E+00	5.591E+01	>0.50	negligible
Collimator A Z position in room (cm)	1.000E+00	-2.607E+00	0.3922	-2.607E+00
Collimator A foil holder base thickness (cm)	2.887E-02	1.559E+01	>0.50	negligible
Collimator A foil holder base density (g/cm ³)	3.425E-01	-1.631E+01	>0.50	negligible
Collimator A foil holder base Mg content (wf)	2.887E-03	-1.490E+01	>0.50	negligible
Collimator A foil back plate thickness (cm)	2.887E-02	-2.006E+01	>0.50	negligible
Collimator A foil back plate density (g/cm ³)	3.425E-01	4.134E-01	>0.50	negligible
Collimator A foil back plate Mg content (wf)	2.887E-03	-3.631E+01	>0.50	negligible
Collimator A foil cover thickness (cm)	2.887E-02	-1.373E+02	>0.50	negligible
Collimator A foil cover density (g/cm ³)	3.425E-01	-2.619E+00	>0.50	negligible
Collimator A foil cover Mg content (wf)	2.887E-03	-8.804E+00	>0.50	negligible
Collimator A Fe foil thickness (cm)	5.773E-03	-1.543E+02	>0.50	negligible
Collimator A Fe foil radius (cm)	1.443E-02	8.781E+01	>0.50	negligible
Collimator A Fe foil mass (g)	4.656E-03	-1.580E-01	>0.50	negligible
Collimator A Fe foil Mn content (wf)	5.000E-05	-1.723E+01	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.484E+02
Total experimental uncertainty relative				0.0643

ALARM-TRAN-AIR-SHIELD-001

Table I-8. Case 1 Collimator A $^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.882%			1.150E+00
Number of fissions	6.000%			3.666E+00
SILENE room concrete density (g/cm ³)	2.000E-01	-2.205E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-2.206E+01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	1.725E+06	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.106E+01	0.2470	-3.192E-01
SILENE assembly wall density (g/cm ³)	4.500E-01	-7.243E-01	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	6.452E-01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-1.376E+00	>0.50	negligible
Critical height (cm)	5.000E-04	-4.643E-02	>0.50	negligible
Solution concentration (g/L)	5.000E-02	-9.404E-02	>0.50	negligible
Solution density (g/cm ³)	5.456E-03	-5.749E+01	0.3347	-3.136E-01
Solution uranium enrichment (wf)	1.500E-05	1.296E-04	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-3.760E-02	>0.50	negligible
Collimator A inner stainless steel thickness (cm)	2.887E-02	7.093E-01	>0.50	negligible
Collimator A inner stainless steel density (g/cm ³)	3.900E-01	-4.918E-15	>0.50	negligible
Collimator A inner stainless steel Cr content (wf)	5.774E-03	3.431E+00	>0.50	negligible
Collimator A inner stainless steel Ni content (wf)	5.774E-03	-7.283E-01	>0.50	negligible
Collimator A copper thickness (cm)	2.887E-02	-1.048E+00	>0.50	negligible
Collimator A copper density (g/cm ³)	4.600E-01	8.181E-03	>0.50	negligible
Collimator A lead thickness (cm)	2.887E-02	6.743E-01	>0.50	negligible
Collimator A lead density (g/cm ³)	1.720E-01	9.216E-02	>0.50	negligible
Collimator A PPB9 density (g/cm ³)	6.282E-02	-7.752E-01	>0.50	negligible
Collimator A PPB9 H content (wf)	1.744E-03	-2.151E+01	>0.50	negligible
Collimator A PPB9 B content (wf)	6.158E-04	-1.400E+02	>0.50	negligible
Collimator A X position in room (cm)	1.000E+00	-5.363E-01	0.0458	-5.363E-01
Collimator A Y position in room (cm)	1.000E+00	7.616E-01	>0.50	negligible
Collimator A Z position in room (cm)	1.000E+00	-4.526E-02	>0.50	negligible
Collimator A foil holder base thickness (cm)	2.887E-02	4.128E-02	>0.50	negligible
Collimator A foil holder base density (g/cm ³)	3.425E-01	1.733E-01	>0.50	negligible
Collimator A foil holder base Mg content (wf)	2.887E-03	1.260E+00	>0.50	negligible
Collimator A foil back plate thickness (cm)	2.887E-02	-1.135E+00	>0.50	negligible
Collimator A foil back plate density (g/cm ³)	3.425E-01	-3.724E-03	>0.50	negligible
Collimator A foil back plate Mg content (wf)	2.887E-03	1.100E-01	>0.50	negligible
Collimator A foil cover thickness (cm)	2.887E-02	-4.802E+00	>0.50	negligible
Collimator A foil cover density (g/cm ³)	3.425E-01	-1.170E-01	>0.50	negligible
Collimator A foil cover Mg content (wf)	2.887E-03	-1.080E+00	>0.50	negligible
Collimator A Mg foil thickness (cm)	1.155E-02	-1.785E+00	>0.50	negligible
Collimator A Mg foil radius (cm)	1.443E-02	-6.886E+00	>0.50	negligible
Collimator A Mg foil mass (g)	2.182E-03	-2.208E-01	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				3.905E+00
Total experimental uncertainty relative				0.0639

ALARM-TRAN-AIR-SHIELD-001

Table I-9. Case 1 Collimator A $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.532%			2.200E-01
Number of fissions	6.000%			8.616E-01
SILENE room concrete density (g/cm ³)	2.000E-01	3.751E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-2.361E+01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	1.025E+06	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.996E+00	0.1157	-5.763E-02
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.234E-01	0.3788	-5.554E-02
SILENE assembly wall Cr content (wf)	5.774E-03	-5.499E-02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-6.049E-01	>0.50	negligible
Critical height (cm)	5.000E-04	-1.809E-02	0.1232	-9.047E-06
Solution concentration (g/L)	5.000E-02	-4.788E-02	>0.50	negligible
Solution density (g/cm ³)	5.456E-03	-1.210E+01	0.1360	-6.603E-02
Solution uranium enrichment (wf)	1.500E-05	-1.016E-03	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-5.493E-03	>0.50	negligible
Collimator A inner stainless steel thickness (cm)	2.887E-02	7.054E-01	>0.50	negligible
Collimator A inner stainless steel density (g/cm ³)	3.900E-01	6.300E-03	>0.50	negligible
Collimator A inner stainless steel Cr content (wf)	5.774E-03	1.200E-01	>0.50	negligible
Collimator A inner stainless steel Ni content (wf)	5.774E-03	-2.534E-01	>0.50	negligible
Collimator A copper thickness (cm)	2.887E-02	-2.577E-01	>0.50	negligible
Collimator A copper density (g/cm ³)	4.600E-01	5.719E-03	>0.50	negligible
Collimator A lead thickness (cm)	2.887E-02	3.819E-01	0.2418	1.102E-02
Collimator A lead density (g/cm ³)	1.720E-01	2.351E-02	>0.50	negligible
Collimator A PPB9 density (g/cm ³)	6.282E-02	-5.205E-01	0.2864	-3.269E-02
Collimator A PPB9 H content (wf)	1.744E-03	-1.255E+01	0.3956	-2.189E-02
Collimator A PPB9 B content (wf)	6.158E-04	2.546E+01	>0.50	negligible
Collimator A X position in room (cm)	1.000E+00	-1.047E-01	0.0320	-1.047E-01
Collimator A Y position in room (cm)	1.000E+00	3.405E-02	>0.50	negligible
Collimator A Z position in room (cm)	1.000E+00	-8.537E-03	0.4792	-8.537E-03
Collimator A foil holder base thickness (cm)	2.887E-02	1.847E-01	>0.50	negligible
Collimator A foil holder base density (g/cm ³)	3.425E-01	5.104E-02	>0.50	negligible
Collimator A foil holder base Mg content (wf)	2.887E-03	-5.000E-02	>0.50	negligible
Collimator A foil back plate thickness (cm)	2.887E-02	3.000E-02	>0.50	negligible
Collimator A foil back plate density (g/cm ³)	3.425E-01	3.725E-03	>0.50	negligible
Collimator A foil back plate Mg content (wf)	2.887E-03	-1.300E-01	>0.50	negligible
Collimator A foil cover thickness (cm)	2.887E-02	-3.635E-01	>0.50	negligible
Collimator A foil cover density (g/cm ³)	3.425E-01	-1.155E-02	>0.50	negligible
Collimator A foil cover Mg content (wf)	2.887E-03	4.001E-02	>0.50	negligible
Collimator A Ni foil thickness (cm)	1.155E-02	-3.600E-01	>0.50	negligible
Collimator A Ni foil radius (cm)	1.443E-02	2.751E-01	>0.50	negligible
Collimator A Ni foil mass (g)	1.162E-02	-1.009E-02	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				9.023E-01
Total experimental uncertainty relative				0.0628

ALARM-TRAN-AIR-SHIELD-001

Table I-10. Case 1 Collimator A Al₂O₃ TLD Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	5.000%			3.305E-01
Number of fissions	6.000%			3.966E-01
SILENE room concrete density (g/cm ³)	2.000E-01	-1.338E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	7.472E+00	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	6.249E+05	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-8.126E-01	0.2457	-2.346E-02
SILENE assembly wall density (g/cm ³)	4.500E-01	-3.366E-02	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-3.443E-01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	2.570E-01	>0.50	negligible
Critical height (cm)	5.000E-04	2.572E-02	0.0882	1.286E-05
Solution concentration (g/L)	5.000E-02	5.025E-02	>0.50	negligible
Solution density (g/cm ³)	5.456E-03	7.363E-01	>0.50	negligible
Solution uranium enrichment (wf)	1.500E-05	4.890E-03	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-3.124E-03	>0.50	negligible
Collimator A inner stainless steel thickness (cm)	2.887E-02	8.278E-02	>0.50	negligible
Collimator A inner stainless steel density (g/cm ³)	3.900E-01	1.726E-02	>0.50	negligible
Collimator A inner stainless steel Cr content (wf)	5.774E-03	-1.168E-01	>0.50	negligible
Collimator A inner stainless steel Ni content (wf)	5.774E-03	-2.332E-02	>0.50	negligible
Collimator A copper thickness (cm)	2.887E-02	4.732E-01	0.3385	1.366E-02
Collimator A copper density (g/cm ³)	4.600E-01	2.127E-02	>0.50	negligible
Collimator A lead thickness (cm)	2.887E-02	-2.941E-02	>0.50	negligible
Collimator A lead density (g/cm ³)	1.720E-01	-2.173E-03	>0.50	negligible
Collimator A PPB9 density (g/cm ³)	6.282E-02	1.867E-01	>0.50	negligible
Collimator A PPB9 H content (wf)	1.744E-03	1.003E+00	>0.50	negligible
Collimator A PPB9 B content (wf)	6.158E-04	-2.884E+00	>0.50	negligible
Collimator A X position in room (cm)	1.000E+00	-4.115E-02	0.0730	-4.115E-02
Collimator A Y position in room (cm)	1.000E+00	-2.760E-01	>0.50	negligible
Collimator A Z position in room (cm)	1.000E+00	-2.074E-03	>0.50	negligible
Collimator A foil holder base thickness (cm)	2.887E-02	6.365E-02	>0.50	negligible
Collimator A foil holder base density (g/cm ³)	3.425E-01	2.983E-02	>0.50	negligible
Collimator A foil holder base Mg content (wf)	2.887E-03	3.319E-01	>0.50	negligible
Collimator A foil back plate thickness (cm)	2.887E-02	2.891E-02	>0.50	negligible
Collimator A foil back plate density (g/cm ³)	3.425E-01	1.403E-02	>0.50	negligible
Collimator A foil back plate Mg content (wf)	2.887E-03	1.900E-02	>0.50	negligible
Collimator A foil cover thickness (cm)	2.887E-02	5.102E-02	>0.50	negligible
Collimator A foil cover density (g/cm ³)	3.425E-01	-1.211E-02	>0.50	negligible
Collimator A foil cover Mg content (wf)	2.887E-03	3.501E-02	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				5.186E-01
Total experimental uncertainty relative				0.0785

ALARM-TRAN-AIR-SHIELD-001

I.2 Case 2 Collimator B Uncertainties

Table I-11. Case 2 Collimator B $^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.316%			2.950E-01
Number of fissions	6.000%			1.345E+00
SILENE room concrete density (g/cm ³)	2.000E-01	1.227E-01	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-6.357E+01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	3.002E+05	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-2.709E+00	0.1209	-7.821E-02
SILENE assembly wall density (g/cm ³)	4.500E-01	-2.184E-01	0.3041	-9.826E-02
SILENE assembly wall Cr content (wf)	5.774E-03	2.200E-01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	1.489E+00	>0.50	negligible
Critical height (cm)	5.000E-04	-1.056E-01	0.0301	-5.278E-05
Solution concentration (g/L)	5.000E-02	-1.576E-01	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-2.626E+01	0.0888	-1.431E-01
Solution uranium enrichment (wf)	1.500E-05	-1.618E-02	0.3492	-2.427E-07
Solution temperature (deg C)	7.861E+00	-1.180E-04	>0.50	negligible
Collimator B inner stainless steel thickness (cm)	2.887E-02	3.706E+00	0.1767	1.070E-01
Collimator B inner stainless steel density (g/cm ³)	3.900E-01	-5.243E-02	>0.50	negligible
Collimator B inner stainless steel Cr content (wf)	5.774E-03	-2.505E+00	>0.50	negligible
Collimator B inner stainless steel Ni content (wf)	5.774E-03	2.814E+00	>0.50	negligible
Collimator B copper thickness (cm)	2.887E-02	-6.084E+00	0.0432	-1.756E-01
Collimator B copper density (g/cm ³)	4.600E-01	-1.800E-01	0.3262	-8.281E-02
Collimator B lead thickness (cm)	2.887E-02	1.689E+00	0.0776	4.875E-02
Collimator B lead density (g/cm ³)	1.720E-01	1.071E-01	0.4312	1.841E-02
Collimator B PPB9 density (g/cm ³)	6.282E-02	3.049E+00	0.0703	1.915E-01
Collimator B PPB9 H content (wf)	1.744E-03	2.005E+01	0.3511	3.496E-02
Collimator B PPB9 B content (wf)	6.158E-04	-4.293E+02	0.1090	-2.644E-01
Collimator B X position in room (cm)	1.000E+00	-1.625E-01	0.0366	-1.625E-01
Collimator B Y position in room (cm)	1.000E+00	-1.711E-01	0.0376	-1.711E-01
Collimator B Z position in room (cm)	1.000E+00	-3.242E-02	0.2091	-3.242E-02
Collimator B foil holder base thickness (cm)	2.887E-02	-1.373E-02	>0.50	negligible
Collimator B foil holder base density (g/cm ³)	3.425E-01	-3.905E-02	>0.50	negligible
Collimator B foil holder base Mg content (wf)	2.887E-03	6.013E+00	>0.50	negligible
Collimator B foil holder back plate thickness (cm)	2.887E-02	-9.199E-01	>0.50	negligible
Collimator B foil holder back plate density (g/cm ³)	3.425E-01	-3.873E-02	>0.50	negligible
Collimator B foil holder back plate Mg content (wf)	2.887E-03	-1.130E+00	>0.50	negligible
Collimator B foil holder cover thickness (cm)	2.887E-02	-1.429E+00	>0.50	negligible
Collimator B foil holder cover density (g/cm ³)	3.425E-01	-8.088E-02	>0.50	negligible
Collimator B foil holder cover Mg content (wf)	2.887E-03	6.202E-01	>0.50	negligible
Collimator B Co foil thickness (cm)	1.155E-02	-4.046E+01	0.0324	-4.671E-01
Collimator B Co foil radius (cm)	1.443E-02	-7.846E-01	>0.50	negligible
Collimator B Co foil mass (g)	1.163E-02	-9.305E-01	0.0608	-1.082E-02
Barite concrete thickness (cm)	2.887E-02	-6.516E-02	0.1498	-1.881E-03
Barite concrete density (g/cm ³)	1.625E-01	-6.193E+00	0.0261	-1.006E+00
Barite concrete H content (wf)	5.000E-05	4.359E+02	0.3005	2.179E-02
Barite concrete Si content (wf)	5.000E-05	1.712E+00	>0.50	negligible
Barite concrete Al content (wf)	5.000E-05	3.038E+01	>0.50	negligible
Barite concrete Fe content (wf)	5.000E-05	6.468E+00	>0.50	negligible
Barite concrete C content (wf)	5.000E-05	7.495E+01	>0.50	negligible
Barite concrete Ca content (wf)	5.000E-05	9.215E+00	>0.50	negligible
Barite concrete Mg content (wf)	5.000E-05	-1.316E+02	>0.50	negligible
Barite concrete Sr content (wf)	5.000E-05	-2.326E+01	>0.50	negligible
Barite concrete K content (wf)	5.000E-05	-2.297E+02	>0.50	negligible
Barite concrete Ba content (wf)	1.000E-02	-1.834E+00	>0.50	negligible
Barite concrete S content (wf)	1.000E-02	-4.634E+00	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.839E+00
Total experimental uncertainty relative				0.0820

ALARM-TRAN-AIR-SHIELD-001

Table I-12. Case 2 Collimator B $^{197}\text{Au}(n,\gamma)^{198}\text{Au}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.546%			3.750E+02
Number of fissions	6.000%			1.456E+03
SILENE room concrete density (g/cm^3)	2.000E-01	1.061E+02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-6.165E+04	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	1.887E+09	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-3.616E+03	0.1439	-1.044E+02
SILENE assembly wall density (g/cm^3)	4.500E-01	-2.504E+02	0.4088	-1.127E+02
SILENE assembly wall Cr content (wf)	5.774E-03	2.603E+02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	8.865E+02	>0.50	negligible
Critical height (cm)	5.000E-04	-1.150E+02	0.0439	-5.752E-02
Solution concentration (g/L)	5.000E-02	-4.777E+01	>0.50	negligible
Solution density (g/cm^3)	5.451E-03	-2.805E+04	0.1284	-1.529E+02
Solution uranium enrichment (wf)	1.500E-05	-9.366E+00	>0.50	negligible
Solution temperature (deg C)	7.861E+00	2.051E+00	>0.50	negligible
Collimator B inner stainless steel thickness (cm)	2.887E-02	3.744E+03	0.2708	1.081E+02
Collimator B inner stainless steel density (g/cm^3)	3.900E-01	7.176E+01	>0.50	negligible
Collimator B inner stainless steel Cr content (wf)	5.774E-03	-1.914E+03	>0.50	negligible
Collimator B inner stainless steel Ni content (wf)	5.774E-03	3.254E+03	>0.50	negligible
Collimator B copper thickness (cm)	2.887E-02	-4.569E+03	0.0913	-1.319E+02
Collimator B copper density (g/cm^3)	4.600E-01	-7.766E+01	>0.50	negligible
Collimator B lead thickness (cm)	2.887E-02	1.605E+03	0.1265	4.634E+01
Collimator B lead density (g/cm^3)	1.720E-01	2.415E+02	0.3038	4.153E+01
Collimator B PPB9 density (g/cm^3)	6.282E-02	1.648E+03	0.2066	1.035E+02
Collimator B PPB9 H content (wf)	1.744E-03	2.835E+02	>0.50	negligible
Collimator B PPB9 B content (wf)	6.158E-04	-2.650E+05	0.2730	-1.632E+02
Collimator B X position in room (cm)	1.000E+00	-2.055E+02	0.0729	-2.055E+02
Collimator B Y position in room (cm)	1.000E+00	-1.882E+02	0.0531	-1.882E+02
Collimator B Z position in room (cm)	1.000E+00	-1.375E+01	>0.50	negligible
Collimator B foil holder base thickness (cm)	2.887E-02	7.780E+02	>0.50	negligible
Collimator B foil holder base density (g/cm^3)	3.425E-01	1.421E+02	>0.50	negligible
Collimator B foil holder base Mg content (wf)	2.887E-03	3.073E+03	>0.50	negligible
Collimator B foil holder back plate thickness (cm)	2.887E-02	1.912E+03	>0.50	negligible
Collimator B foil holder back plate density (g/cm^3)	3.425E-01	3.688E+01	>0.50	negligible
Collimator B foil holder back plate Mg content (wf)	2.887E-03	1.240E+03	>0.50	negligible
Collimator B foil holder cover thickness (cm)	2.887E-02	-8.410E+02	>0.50	negligible
Collimator B foil holder cover density (g/cm^3)	3.425E-01	2.462E+01	>0.50	negligible
Collimator B foil holder cover Mg content (wf)	2.887E-03	3.339E+03	>0.50	negligible
Collimator B Au foil thickness (cm)	1.443E-03	-2.905E+05	0.0573	-4.191E+02
Collimator B Au foil radius (cm)	5.774E-03	-1.081E+03	>0.50	negligible
Collimator B Au foil mass (g)	3.074E-03	-3.774E+02	0.1095	-1.160E+00
Barite concrete thickness (cm)	2.887E-02	-1.141E+02	0.1288	-3.293E+00
Barite concrete density (g/cm^3)	1.625E-01	-7.500E+03	0.0332	-1.219E+03
Barite concrete H content (wf)	5.000E-05	-4.671E+05	0.4561	-2.335E+01
Barite concrete Si content (wf)	5.000E-05	1.358E+04	>0.50	negligible
Barite concrete Al content (wf)	5.000E-05	-6.067E+04	>0.50	negligible
Barite concrete Fe content (wf)	5.000E-05	-4.411E+04	>0.50	negligible
Barite concrete C content (wf)	5.000E-05	-3.068E+05	>0.50	negligible
Barite concrete Ca content (wf)	5.000E-05	-5.883E+03	>0.50	negligible
Barite concrete Mg content (wf)	5.000E-05	4.312E+05	>0.50	negligible
Barite concrete Sr content (wf)	5.000E-05	8.195E+04	>0.50	negligible
Barite concrete K content (wf)	5.000E-05	1.841E+05	>0.50	negligible
Barite concrete Ba content (wf)	1.000E-02	9.947E+03	0.4080	9.947E+01
Barite concrete S content (wf)	1.000E-02	-3.920E+03	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				2.031E+03
Total experimental uncertainty relative				0.0837

ALARM-TRAN-AIR-SHIELD-001

Table I-13. Case 2 Collimator B $^{115}\text{In}(n,\gamma)^{116}\text{In}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.833%			5.500E+04
Number of fissions	6.000%			1.800E+05
SILENE room concrete density (g/cm ³)	2.000E-01	3.216E+04	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-1.118E+07	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-4.678E+11	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-3.458E+05	0.1396	-9.983E+03
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.720E+04	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	1.767E+05	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-1.930E+05	>0.50	negligible
Critical height (cm)	5.000E-04	-1.398E+04	0.0336	-6.992E+00
Solution concentration (g/L)	5.000E-02	-5.309E+03	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-3.489E+06	0.0987	-1.901E+04
Solution uranium enrichment (wf)	1.500E-05	-9.135E+02	>0.50	negligible
Solution temperature (deg C)	7.861E+00	5.252E+02	>0.50	negligible
Collimator B inner stainless steel thickness (cm)	2.887E-02	3.792E+05	0.2552	1.095E+04
Collimator B inner stainless steel density (g/cm ³)	3.900E-01	5.461E+03	>0.50	negligible
Collimator B inner stainless steel Cr content (wf)	5.774E-03	-4.732E+05	>0.50	negligible
Collimator B inner stainless steel Ni content (wf)	5.774E-03	2.395E+05	>0.50	negligible
Collimator B copper thickness (cm)	2.887E-02	-6.254E+05	0.0620	-1.805E+04
Collimator B copper density (g/cm ³)	4.600E-01	-1.822E+04	0.4759	-8.382E+03
Collimator B lead thickness (cm)	2.887E-02	2.174E+05	0.0890	6.276E+03
Collimator B lead density (g/cm ³)	1.720E-01	3.886E+03	>0.50	negligible
Collimator B PPB9 density (g/cm ³)	6.282E-02	2.441E+05	0.1461	1.534E+04
Collimator B PPB9 H content (wf)	1.744E-03	1.017E+06	>0.50	negligible
Collimator B PPB9 B content (wf)	6.158E-04	-3.911E+07	0.1766	-2.409E+04
Collimator B X position in room (cm)	1.000E+00	-2.006E+04	0.0432	-2.006E+04
Collimator B Y position in room (cm)	1.000E+00	-2.119E+04	0.0450	-2.119E+04
Collimator B Z position in room (cm)	1.000E+00	-2.731E+03	0.3930	-2.731E+03
Collimator B foil holder base thickness (cm)	2.887E-02	-1.302E+04	>0.50	negligible
Collimator B foil holder base density (g/cm ³)	3.425E-01	1.654E+04	>0.50	negligible
Collimator B foil holder base Mg content (wf)	2.887E-03	6.284E+05	>0.50	negligible
Collimator B foil holder back plate thickness (cm)	2.887E-02	-2.113E+05	>0.50	negligible
Collimator B foil holder back plate density (g/cm ³)	3.425E-01	-8.420E+03	>0.50	negligible
Collimator B foil holder back plate Mg content (wf)	2.887E-03	2.981E+05	>0.50	negligible
Collimator B foil holder cover thickness (cm)	2.887E-02	-3.931E+05	>0.50	negligible
Collimator B foil holder cover density (g/cm ³)	3.425E-01	-1.638E+04	>0.50	negligible
Collimator B foil holder cover Mg content (wf)	2.887E-03	7.001E+04	>0.50	negligible
Collimator B In foil thickness (cm)	5.773E-03	-1.513E+07	0.0248	-8.733E+04
Collimator B In foil radius (cm)	1.443E-02	-1.281E+05	>0.50	negligible
Collimator B In foil mass (g)	4.666E-03	-2.107E+05	0.0494	-9.832E+02
Barite concrete thickness (cm)	2.887E-02	-3.939E+02	>0.50	negligible
Barite concrete density (g/cm ³)	1.625E-01	-8.423E+05	0.0283	-1.369E+05
Barite concrete H content (wf)	5.000E-05	-1.191E+07	>0.50	negligible
Barite concrete Si content (wf)	5.000E-05	3.911E+05	>0.50	negligible
Barite concrete Al content (wf)	5.000E-05	-1.429E+07	>0.50	negligible
Barite concrete Fe content (wf)	5.000E-05	-6.900E+06	>0.50	negligible
Barite concrete C content (wf)	5.000E-05	1.117E+07	>0.50	negligible
Barite concrete Ca content (wf)	5.000E-05	4.397E+05	>0.50	negligible
Barite concrete Mg content (wf)	5.000E-05	-1.357E+07	>0.50	negligible
Barite concrete Sr content (wf)	5.000E-05	1.902E+05	>0.50	negligible
Barite concrete K content (wf)	5.000E-05	-2.867E+07	>0.50	negligible
Barite concrete Ba content (wf)	1.000E-02	8.487E+05	0.4553	8.487E+03
Barite concrete S content (wf)	1.000E-02	-1.163E+05	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				2.541E+05
Total experimental uncertainty relative				0.0847

ALARM-TRAN-AIR-SHIELD-001

Table I-14. Case 2 Collimator B $^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i^d)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.672%			2.000E+01
Number of fissions	6.000%			7.176E+01
SILENE room concrete density (g/cm^3)	2.000E-01	7.537E+00	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	9.206E+02	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	4.092E+08	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.668E+02	0.1388	-4.816E+00
SILENE assembly wall density (g/cm^3)	4.500E-01	-5.899E+00	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	3.286E+01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-1.943E+01	>0.50	negligible
Critical height (cm)	5.000E-04	-2.635E+00	0.0826	-1.317E-03
Solution concentration (g/L)	5.000E-02	5.395E+00	>0.50	negligible
Solution density (g/cm^3)	5.451E-03	-1.251E+03	0.1318	-6.818E+00
Solution uranium enrichment (wf)	1.500E-05	3.498E-01	>0.50	negligible
Solution temperature (deg C)	7.861E+00	1.030E-01	>0.50	negligible
Collimator B inner stainless steel thickness (cm)	2.887E-02	5.386E+01	>0.50	negligible
Collimator B inner stainless steel density (g/cm^3)	3.900E-01	-1.179E+00	>0.50	negligible
Collimator B inner stainless steel Cr content (wf)	5.774E-03	-1.860E+02	>0.50	negligible
Collimator B inner stainless steel Ni content (wf)	5.774E-03	-1.600E+02	>0.50	negligible
Collimator B copper thickness (cm)	2.887E-02	-6.017E+01	0.3075	-1.737E+00
Collimator B copper density (g/cm^3)	4.600E-01	2.927E+00	>0.50	negligible
Collimator B lead thickness (cm)	2.887E-02	7.065E+01	0.1309	2.040E+00
Collimator B lead density (g/cm^3)	1.720E-01	3.950E+00	>0.50	negligible
Collimator B PPB9 density (g/cm^3)	6.282E-02	-1.997E+02	0.0743	-1.255E+01
Collimator B PPB9 H content (wf)	1.744E-03	-2.829E+03	0.1762	-4.934E+00
Collimator B PPB9 B content (wf)	6.158E-04	8.488E+00	>0.50	negligible
Collimator B X position in room (cm)	1.000E+00	-7.437E+00	0.0408	-7.437E+00
Collimator B Y position in room (cm)	1.000E+00	-7.040E+00	0.0406	-7.040E+00
Collimator B Z position in room (cm)	1.000E+00	-9.912E-01	0.4085	-9.912E-01
Collimator B foil holder base thickness (cm)	2.887E-02	6.392E+01	0.3618	1.845E+00
Collimator B foil holder base density (g/cm^3)	3.425E-01	2.362E+01	>0.50	negligible
Collimator B foil holder base Mg content (wf)	2.887E-03	-2.588E+02	>0.50	negligible
Collimator B foil holder back plate thickness (cm)	2.887E-02	1.705E+02	>0.50	negligible
Collimator B foil holder back plate density (g/cm^3)	3.425E-01	7.668E+00	>0.50	negligible
Collimator B foil holder back plate Mg content (wf)	2.887E-03	-6.787E+01	>0.50	negligible
Collimator B foil holder cover thickness (cm)	2.887E-02	6.168E+01	>0.50	negligible
Collimator B foil holder cover density (g/cm^3)	3.425E-01	1.599E+00	>0.50	negligible
Collimator B foil holder cover Mg content (wf)	2.887E-03	5.990E+00	>0.50	negligible
Collimator B In foil thickness (cm)	5.773E-03	1.975E+02	>0.50	negligible
Collimator B In foil radius (cm)	1.443E-02	7.492E+00	>0.50	negligible
Collimator B In foil mass (g)	4.666E-03	4.035E-01	>0.50	negligible
Barite concrete thickness (cm)	2.887E-02	3.341E+01	0.0192	9.644E-01
Barite concrete density (g/cm^3)	1.625E-01	-6.797E+02	0.0167	-1.104E+02
Barite concrete H content (wf)	5.000E-05	-9.880E+04	0.0936	-4.940E+00
Barite concrete Si content (wf)	5.000E-05	2.525E+02	>0.50	negligible
Barite concrete Al content (wf)	5.000E-05	2.860E+03	>0.50	negligible
Barite concrete Fe content (wf)	5.000E-05	9.727E+02	>0.50	negligible
Barite concrete C content (wf)	5.000E-05	3.772E+03	>0.50	negligible
Barite concrete Ca content (wf)	5.000E-05	-1.053E+02	>0.50	negligible
Barite concrete Mg content (wf)	5.000E-05	-5.169E+03	>0.50	negligible
Barite concrete Sr content (wf)	5.000E-05	-4.672E+03	>0.50	negligible
Barite concrete K content (wf)	5.000E-05	5.121E+03	>0.50	negligible
Barite concrete Ba content (wf)	1.000E-02	2.021E+03	0.0916	2.021E+01
Barite concrete S content (wf)	1.000E-02	7.267E+01	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.362E+02
Total experimental uncertainty relative				0.1139

ALARM-TRAN-AIR-SHIELD-001

Table I-15. Case 2 Collimator B $^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.929%			6.000E-04
Number of fissions	6.000%			1.866E-03
SILENE room concrete density (g/cm ³)	2.000E-01	1.703E-04	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	9.854E-02	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	4.294E+02	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-4.961E-03	0.1284	-1.432E-04
SILENE assembly wall density (g/cm ³)	4.500E-01	-2.395E-04	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	1.108E-03	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	1.605E-03	>0.50	negligible
Critical height (cm)	5.000E-04	-5.325E-05	0.1189	-2.662E-08
Solution concentration (g/L)	5.000E-02	7.251E-05	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-3.680E-02	0.1266	-2.006E-04
Solution uranium enrichment (wf)	1.500E-05	4.425E-07	>0.50	negligible
Solution temperature (deg C)	7.861E+00	2.173E-05	>0.50	negligible
Collimator B inner stainless steel thickness (cm)	2.887E-02	-4.414E-04	>0.50	negligible
Collimator B inner stainless steel density (g/cm ³)	3.900E-01	-8.540E-05	>0.50	negligible
Collimator B inner stainless steel Cr content (wf)	5.774E-03	1.626E-04	>0.50	negligible
Collimator B inner stainless steel Ni content (wf)	5.774E-03	-4.613E-03	>0.50	negligible
Collimator B copper thickness (cm)	2.887E-02	-7.702E-04	>0.50	negligible
Collimator B copper density (g/cm ³)	4.600E-01	4.373E-06	>0.50	negligible
Collimator B lead thickness (cm)	2.887E-02	7.570E-04	0.3372	2.185E-05
Collimator B lead density (g/cm ³)	1.720E-01	8.017E-05	>0.50	negligible
Collimator B PPB9 density (g/cm ³)	6.282E-02	-2.664E-03	0.1582	-1.674E-04
Collimator B PPB9 H content (wf)	1.744E-03	-4.931E-02	0.2853	-8.599E-05
Collimator B PPB9 B content (wf)	6.158E-04	-1.050E-01	>0.50	negligible
Collimator B X position in room (cm)	1.000E+00	-1.973E-04	0.0351	-1.973E-04
Collimator B Y position in room (cm)	1.000E+00	-1.952E-04	0.0412	-1.952E-04
Collimator B Z position in room (cm)	1.000E+00	-2.689E-05	0.3537	-2.689E-05
Collimator B foil holder base thickness (cm)	2.887E-02	5.646E-04	>0.50	negligible
Collimator B foil holder base density (g/cm ³)	3.425E-01	-8.653E-05	>0.50	negligible
Collimator B foil holder base Mg content (wf)	2.887E-03	-3.694E-03	>0.50	negligible
Collimator B foil holder back plate thickness (cm)	2.887E-02	2.218E-03	>0.50	negligible
Collimator B foil holder back plate density (g/cm ³)	3.425E-01	1.538E-04	>0.50	negligible
Collimator B foil holder back plate Mg content (wf)	2.887E-03	-1.578E-03	>0.50	negligible
Collimator B foil holder cover thickness (cm)	2.887E-02	-1.630E-03	>0.50	negligible
Collimator B foil holder cover density (g/cm ³)	3.425E-01	-1.584E-04	>0.50	negligible
Collimator B foil holder cover Mg content (wf)	2.887E-03	-7.895E-04	>0.50	negligible
Collimator B Fe foil thickness (cm)	1.732E-02	-2.547E-03	>0.50	negligible
Collimator B Fe foil radius (cm)	1.443E-02	-1.563E-03	>0.50	negligible
Collimator B Fe foil mass (g)	1.459E-02	-6.809E-05	>0.50	negligible
Barite concrete thickness (cm)	2.887E-02	5.536E-04	0.0360	1.598E-05
Barite concrete density (g/cm ³)	1.625E-01	-1.927E-02	0.0164	-3.131E-03
Barite concrete H content (wf)	5.000E-05	-2.008E+00	0.1305	-1.004E-04
Barite concrete Si content (wf)	5.000E-05	8.619E-03	>0.50	negligible
Barite concrete Al content (wf)	5.000E-05	1.086E-01	>0.50	negligible
Barite concrete Fe content (wf)	5.000E-05	1.001E-01	>0.50	negligible
Barite concrete C content (wf)	5.000E-05	-2.153E-01	>0.50	negligible
Barite concrete Ca content (wf)	5.000E-05	4.356E-02	0.3619	2.178E-06
Barite concrete Mg content (wf)	5.000E-05	-8.630E-02	>0.50	negligible
Barite concrete Sr content (wf)	5.000E-05	1.510E-02	>0.50	negligible
Barite concrete K content (wf)	5.000E-05	3.610E-03	>0.50	negligible
Barite concrete Ba content (wf)	1.000E-02	6.543E-02	0.0800	6.543E-04
Barite concrete S content (wf)	1.000E-02	3.332E-03	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				3.776E-03
Total experimental uncertainty relative				0.1214

ALARM-TRAN-AIR-SHIELD-001

Table I- 16. Case 2 Collimator B $^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn}$ + $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.412%			1.100E+01
Number of fissions	6.000%			4.674E+01
SILENE room concrete density (g/cm ³)	2.000E-01	7.862E+00	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-6.802E+03	0.4428	-7.142E-01
SILENE room concrete B content (wf)	5.450E-07	8.561E+07	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-9.820E+01	0.1376	-2.835E+00
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.030E+01	0.2651	-4.633E+00
SILENE assembly wall Cr content (wf)	5.774E-03	4.739E+01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-3.164E+00	>0.50	negligible
Critical height (cm)	5.000E-04	-3.618E+00	0.0362	-1.809E-03
Solution concentration (g/L)	5.000E-02	-3.490E+00	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-9.376E+02	0.1025	-5.111E+00
Solution uranium enrichment (wf)	1.500E-05	-3.014E-01	>0.50	negligible
Solution temperature (deg C)	7.861E+00	3.311E-01	0.3123	2.603E+00
Collimator B inner stainless steel thickness (cm)	2.887E-02	8.396E+01	0.3206	2.424E+00
Collimator B inner stainless steel density (g/cm ³)	3.900E-01	-8.586E-01	>0.50	negligible
Collimator B inner stainless steel Cr content (wf)	5.774E-03	-1.629E+02	>0.50	negligible
Collimator B inner stainless steel Ni content (wf)	5.774E-03	1.492E+02	>0.50	negligible
Collimator B copper thickness (cm)	2.887E-02	-2.114E+02	0.0496	-6.103E+00
Collimator B copper density (g/cm ³)	4.600E-01	-6.677E+00	0.3618	-3.072E+00
Collimator B lead thickness (cm)	2.887E-02	4.804E+01	0.1123	1.387E+00
Collimator B lead density (g/cm ³)	1.720E-01	4.963E+00	0.3824	8.536E-01
Collimator B PPB9 density (g/cm ³)	6.282E-02	9.343E+01	0.0944	5.869E+00
Collimator B PPB9 H content (wf)	1.744E-03	8.702E+02	0.3328	1.518E+00
Collimator B PPB9 B content (wf)	6.158E-04	-1.553E+04	0.1238	-9.566E+00
Collimator B X position in room (cm)	1.000E+00	-5.207E+00	0.0470	-5.207E+00
Collimator B Y position in room (cm)	1.000E+00	-5.318E+00	0.0441	-5.318E+00
Collimator B Z position in room (cm)	1.000E+00	-8.973E-01	0.2841	-8.973E-01
Collimator B foil holder base thickness (cm)	2.887E-02	3.680E+01	0.3666	1.062E+00
Collimator B foil holder base density (g/cm ³)	3.425E-01	8.466E+00	>0.50	negligible
Collimator B foil holder base Mg content (wf)	2.887E-03	1.161E+01	>0.50	negligible
Collimator B foil holder back plate thickness (cm)	2.887E-02	1.129E+01	>0.50	negligible
Collimator B foil holder back plate density (g/cm ³)	3.425E-01	-1.542E+00	>0.50	negligible
Collimator B foil holder back plate Mg content (wf)	2.887E-03	-1.590E+01	>0.50	negligible
Collimator B foil holder cover thickness (cm)	2.887E-02	-6.489E+01	>0.50	negligible
Collimator B foil holder cover density (g/cm ³)	3.425E-01	2.481E+00	>0.50	negligible
Collimator B foil holder cover Mg content (wf)	2.887E-03	6.023E+01	>0.50	negligible
Collimator B Fe foil thickness (cm)	1.732E-02	-4.400E+01	>0.50	negligible
Collimator B Fe foil radius (cm)	1.443E-02	2.017E+01	>0.50	negligible
Collimator B Fe foil mass (g)	1.459E-02	5.137E-01	>0.50	negligible
Collimator B Fe foil Mn content (wf)	5.000E-05	-3.028E+01	>0.50	negligible
Barite concrete thickness (cm)	2.887E-02	2.003E+00	0.1824	5.782E-02
Barite concrete density (g/cm ³)	1.625E-01	-2.031E+02	0.0327	-3.300E+01
Barite concrete H content (wf)	5.000E-05	1.643E+04	0.3280	8.216E-01
Barite concrete Si content (wf)	5.000E-05	-6.661E+01	>0.50	negligible
Barite concrete Al content (wf)	5.000E-05	-1.740E+02	>0.50	negligible
Barite concrete Fe content (wf)	5.000E-05	-2.830E+03	>0.50	negligible
Barite concrete C content (wf)	5.000E-05	1.079E+03	>0.50	negligible
Barite concrete Ca content (wf)	5.000E-05	2.448E+02	>0.50	negligible
Barite concrete Mg content (wf)	5.000E-05	-2.940E+04	>0.50	negligible
Barite concrete Sr content (wf)	5.000E-05	-7.677E+02	>0.50	negligible
Barite concrete K content (wf)	5.000E-05	-4.818E+03	>0.50	negligible
Barite concrete Ba content (wf)	1.000E-02	-6.128E+00	>0.50	negligible
Barite concrete S content (wf)	1.000E-02	-2.528E+02	0.4275	-2.528E+00
Total experimental uncertainty absolute (σ_{tot}^d)				6.087E+01
Total experimental uncertainty relative				0.0781

ALARM-TRAN-AIR-SHIELD-001

Table I-17. Case 2 Collimator B $^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	3.700%			3.700E-01
Number of fissions	6.000%			6.000E-01
SILENE room concrete density (g/cm^3)	2.000E-01	-8.896E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	1.375E+02	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-3.747E+06	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.984E+00	0.3226	-5.728E-02
SILENE assembly wall density (g/cm^3)	4.500E-01	1.059E-01	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-1.178E-01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	2.406E-01	>0.50	negligible
Critical height (cm)	5.000E-04	-1.161E-02	>0.50	negligible
Solution concentration (g/L)	5.000E-02	5.336E-03	>0.50	negligible
Solution density (g/cm^3)	5.451E-03	-8.779E+00	>0.50	negligible
Solution uranium enrichment (wf)	1.500E-05	-2.158E-03	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-2.485E-03	>0.50	negligible
Collimator B inner stainless steel thickness (cm)	2.887E-02	-3.588E-01	>0.50	negligible
Collimator B inner stainless steel density (g/cm^3)	3.900E-01	5.612E-02	>0.50	negligible
Collimator B inner stainless steel Cr content (wf)	5.774E-03	-3.621E-01	>0.50	negligible
Collimator B inner stainless steel Ni content (wf)	5.774E-03	-7.242E+00	>0.50	negligible
Collimator B copper thickness (cm)	2.887E-02	8.217E-01	>0.50	negligible
Collimator B copper density (g/cm^3)	4.600E-01	-1.071E-01	>0.50	negligible
Collimator B lead thickness (cm)	2.887E-02	2.061E-01	>0.50	negligible
Collimator B lead density (g/cm^3)	1.720E-01	-3.266E-02	>0.50	negligible
Collimator B PPB9 density (g/cm^3)	6.282E-02	-9.605E-01	0.4259	-6.034E-02
Collimator B PPB9 H content (wf)	1.744E-03	1.085E+01	>0.50	negligible
Collimator B PPB9 B content (wf)	6.158E-04	8.653E+01	>0.50	negligible
Collimator B X position in room (cm)	1.000E+00	-6.214E-02	0.0797	-6.214E-02
Collimator B Y position in room (cm)	1.000E+00	-6.455E-02	0.0757	-6.455E-02
Collimator B Z position in room (cm)	1.000E+00	-2.559E-03	>0.50	negligible
Collimator B foil holder base thickness (cm)	2.887E-02	7.025E-01	>0.50	negligible
Collimator B foil holder base density (g/cm^3)	3.425E-01	2.244E-01	>0.50	negligible
Collimator B foil holder base Mg content (wf)	2.887E-03	2.071E+00	>0.50	negligible
Collimator B foil holder back plate thickness (cm)	2.887E-02	5.760E-01	>0.50	negligible
Collimator B foil holder back plate density (g/cm^3)	3.425E-01	-4.996E-02	>0.50	negligible
Collimator B foil holder back plate Mg content (wf)	2.887E-03	3.804E-01	>0.50	negligible
Collimator B foil holder cover thickness (cm)	2.887E-02	1.098E+00	>0.50	negligible
Collimator B foil holder cover density (g/cm^3)	3.425E-01	-1.227E-01	>0.50	negligible
Collimator B foil holder cover Mg content (wf)	2.887E-03	-9.008E-02	>0.50	negligible
Collimator B Mg foil thickness (cm)	1.155E-02	-3.435E-01	>0.50	negligible
Collimator B Mg foil radius (cm)	1.443E-02	-4.261E-01	>0.50	negligible
Collimator B Mg foil mass (g)	2.168E-03	5.166E-02	>0.50	negligible
Barite concrete thickness (cm)	2.887E-02	5.330E-02	0.3816	1.539E-03
Barite concrete density (g/cm^3)	1.625E-01	-6.771E+00	0.0468	-1.100E+00
Barite concrete H content (wf)	5.000E-05	-7.578E+00	>0.50	negligible
Barite concrete Si content (wf)	5.000E-05	-3.339E+00	>0.50	negligible
Barite concrete Al content (wf)	5.000E-05	-1.541E+02	>0.50	negligible
Barite concrete Fe content (wf)	5.000E-05	-6.091E+01	>0.50	negligible
Barite concrete C content (wf)	5.000E-05	-2.582E+02	>0.50	negligible
Barite concrete Ca content (wf)	5.000E-05	1.460E+00	>0.50	negligible
Barite concrete Mg content (wf)	5.000E-05	3.607E+02	>0.50	negligible
Barite concrete Sr content (wf)	5.000E-05	-1.367E+02	>0.50	negligible
Barite concrete K content (wf)	5.000E-05	2.053E+02	>0.50	negligible
Barite concrete Ba content (wf)	1.000E-02	2.574E+01	0.2042	2.574E-01
Barite concrete S content (wf)	1.000E-02	3.198E+00	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.337E+00
Total experimental uncertainty relative				0.1337

ALARM-TRAN-AIR-SHIELD-001

Table I-18. Case 2 Collimator B $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.651%			3.500E-02
Number of fissions	6.000%			1.272E-01
SILENE room concrete density (g/cm ³)	2.000E-01	1.059E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	6.091E+00	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-7.626E+04	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.978E-02	0.4209	-5.711E-04
SILENE assembly wall density (g/cm ³)	4.500E-01	-7.105E-03	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-7.011E-03	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	9.014E-02	>0.50	negligible
Critical height (cm)	5.000E-04	-3.725E-03	0.1040	-1.862E-06
Solution concentration (g/L)	5.000E-02	-3.736E-03	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-1.671E+00	0.1753	-9.108E-03
Solution uranium enrichment (wf)	1.500E-05	-1.954E-04	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-5.353E-04	>0.50	negligible
Collimator B inner stainless steel thickness (cm)	2.887E-02	1.438E-01	>0.50	negligible
Collimator B inner stainless steel density (g/cm ³)	3.900E-01	-6.489E-03	>0.50	negligible
Collimator B inner stainless steel Cr content (wf)	5.774E-03	2.484E-01	>0.50	negligible
Collimator B inner stainless steel Ni content (wf)	5.774E-03	3.714E-03	>0.50	negligible
Collimator B copper thickness (cm)	2.887E-02	-9.058E-02	0.3627	-2.615E-03
Collimator B copper density (g/cm ³)	4.600E-01	4.855E-03	>0.50	negligible
Collimator B lead thickness (cm)	2.887E-02	6.921E-02	0.2371	1.998E-03
Collimator B lead density (g/cm ³)	1.720E-01	8.612E-03	>0.50	negligible
Collimator B PPB9 density (g/cm ³)	6.282E-02	-2.253E-01	0.1174	-1.416E-02
Collimator B PPB9 H content (wf)	1.744E-03	-2.997E+00	0.2943	-5.226E-03
Collimator B PPB9 B content (wf)	6.158E-04	-4.052E+00	>0.50	negligible
Collimator B X position in room (cm)	1.000E+00	-1.274E-02	0.0346	-1.274E-02
Collimator B Y position in room (cm)	1.000E+00	-1.285E-02	0.0406	-1.285E-02
Collimator B Z position in room (cm)	1.000E+00	-2.403E-03	0.2737	-2.403E-03
Collimator B foil holder base thickness (cm)	2.887E-02	1.467E-02	>0.50	negligible
Collimator B foil holder base density (g/cm ³)	3.425E-01	-3.582E-03	>0.50	negligible
Collimator B foil holder base Mg content (wf)	2.887E-03	3.174E-01	>0.50	negligible
Collimator B foil holder back plate thickness (cm)	2.887E-02	-2.551E-02	>0.50	negligible
Collimator B foil holder back plate density (g/cm ³)	3.425E-01	-4.807E-03	>0.50	negligible
Collimator B foil holder back plate Mg content (wf)	2.887E-03	-2.102E-02	>0.50	negligible
Collimator B foil holder cover thickness (cm)	2.887E-02	-1.445E-01	>0.50	negligible
Collimator B foil holder cover density (g/cm ³)	3.425E-01	4.174E-03	>0.50	negligible
Collimator B foil holder cover Mg content (wf)	2.887E-03	-7.281E-02	>0.50	negligible
Collimator B Ni foil thickness (cm)	1.155E-02	-5.903E-02	>0.50	negligible
Collimator B Ni foil radius (cm)	1.443E-02	5.077E-02	>0.50	negligible
Collimator B Ni foil mass (g)	1.154E-02	-2.603E-03	>0.50	negligible
Barite concrete thickness (cm)	2.887E-02	4.391E-02	0.0281	1.268E-03
Barite concrete density (g/cm ³)	1.625E-01	-1.258E+00	0.0157	-2.044E-01
Barite concrete H content (wf)	5.000E-05	-1.300E+02	0.1264	-6.502E-03
Barite concrete Si content (wf)	5.000E-05	4.304E-01	>0.50	negligible
Barite concrete Al content (wf)	5.000E-05	2.048E+00	>0.50	negligible
Barite concrete Fe content (wf)	5.000E-05	2.879E-01	>0.50	negligible
Barite concrete C content (wf)	5.000E-05	1.602E+00	>0.50	negligible
Barite concrete Ca content (wf)	5.000E-05	-2.343E+00	0.4212	-1.172E-04
Barite concrete Mg content (wf)	5.000E-05	1.846E+01	>0.50	negligible
Barite concrete Sr content (wf)	5.000E-05	8.354E+00	>0.50	negligible
Barite concrete K content (wf)	5.000E-05	-2.576E+01	>0.50	negligible
Barite concrete Ba content (wf)	1.000E-02	3.839E+00	0.0857	3.839E-02
Barite concrete S content (wf)	1.000E-02	-4.116E-02	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				2.477E-01
Total experimental uncertainty relative				0.1168

ALARM-TRAN-AIR-SHIELD-001

Table I-19. Case 2 Collimator B Al₂O₃ TLD Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity Value (S_i^d)	Unc	σ_i^d
Measurement uncertainty	5.000%			4.100E-02
Number of fissions	6.000%			4.920E-02
SILENE room concrete density (g/cm ³)	2.000E-01	9.020E-03	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-5.526E+00	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	2.151E+05	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.009E-01	0.3576	-2.912E-03
SILENE assembly wall density (g/cm ³)	4.500E-01	-2.241E-03	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-1.535E-02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-2.531E-02	>0.50	negligible
Critical height (cm)	5.000E-04	9.429E-04	0.4878	4.715E-07
Solution concentration (g/L)	5.000E-02	-9.256E-03	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-7.511E-01	>0.50	negligible
Solution uranium enrichment (wf)	1.500E-05	3.529E-04	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-3.115E-04	>0.50	negligible
Collimator B inner stainless steel thickness (cm)	2.887E-02	-3.081E-03	>0.50	negligible
Collimator B inner stainless steel density (g/cm ³)	3.900E-01	-4.353E-03	>0.50	negligible
Collimator B inner stainless steel Cr content (wf)	5.774E-03	1.314E-01	>0.50	negligible
Collimator B inner stainless steel Ni content (wf)	5.774E-03	1.854E-01	>0.50	negligible
Collimator B copper thickness (cm)	2.887E-02	1.241E-01	0.2434	3.582E-03
Collimator B copper density (g/cm ³)	4.600E-01	9.264E-03	>0.50	negligible
Collimator B lead thickness (cm)	2.887E-02	-6.434E-02	0.3614	-1.857E-03
Collimator B lead density (g/cm ³)	1.720E-01	-1.612E-03	>0.50	negligible
Collimator B PPB9 density (g/cm ³)	6.282E-02	1.391E-02	>0.50	negligible
Collimator B PPB9 H content (wf)	1.744E-03	1.379E+00	>0.50	negligible
Collimator B PPB9 B content (wf)	6.158E-04	-8.443E+00	>0.50	negligible
Collimator B X position in room (cm)	1.000E+00	-2.569E-03	0.1935	-2.569E-03
Collimator B Y position in room (cm)	1.000E+00	-3.083E-03	0.1897	-3.083E-03
Collimator B Z position in room (cm)	1.000E+00	-4.007E-04	>0.50	negligible
Collimator B foil holder base thickness (cm)	2.887E-02	2.243E-02	>0.50	negligible
Collimator B foil holder base density (g/cm ³)	3.425E-01	8.511E-03	>0.50	negligible
Collimator B foil holder base Mg content (wf)	2.887E-03	-2.429E-01	>0.50	negligible
Collimator B foil holder back plate thickness (cm)	2.887E-02	6.409E-04	>0.50	negligible
Collimator B foil holder back plate density (g/cm ³)	3.425E-01	2.489E-03	>0.50	negligible
Collimator B foil holder back plate Mg content (wf)	2.887E-03	-2.957E-02	>0.50	negligible
Collimator B foil holder cover thickness (cm)	2.887E-02	-3.777E-02	>0.50	negligible
Collimator B foil holder cover density (g/cm ³)	3.425E-01	7.511E-03	>0.50	negligible
Collimator B foil holder cover Mg content (wf)	2.887E-03	1.026E-02	>0.50	negligible
Barite concrete thickness (cm)	2.887E-02	-3.114E-03	0.4585	-8.988E-05
Barite concrete density (g/cm ³)	1.625E-01	-2.960E-01	0.0651	-4.809E-02
Barite concrete H content (wf)	5.000E-05	-8.040E-02	>0.50	negligible
Barite concrete Si content (wf)	5.000E-05	-1.303E-01	>0.50	negligible
Barite concrete Al content (wf)	5.000E-05	9.030E-02	>0.50	negligible
Barite concrete Fe content (wf)	5.000E-05	-3.843E-01	>0.50	negligible
Barite concrete C content (wf)	5.000E-05	1.622E+01	>0.50	negligible
Barite concrete Ca content (wf)	5.000E-05	-6.747E-01	>0.50	negligible
Barite concrete Mg content (wf)	5.000E-05	2.362E+01	>0.50	negligible
Barite concrete Sr content (wf)	5.000E-05	1.775E+00	>0.50	negligible
Barite concrete K content (wf)	5.000E-05	1.252E+01	>0.50	negligible
Barite concrete Ba content (wf)	1.000E-02	-2.785E-01	>0.50	negligible
Barite concrete S content (wf)	1.000E-02	7.672E-02	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				8.035E-02
Total experimental uncertainty relative				0.0980

ALARM-TRAN-AIR-SHIELD-001

I.3 Case 3 Free Field Location Uncertainties

Table I-20. Case 3 Free Field $^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.208%			8.000E-01
Number of fissions	6.000%			3.972E+00
SILENE room concrete density (g/cm ³)	2.000E-01	9.724E-01	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	1.232E+03	0.2750	1.294E-01
SILENE room concrete B content (wf)	5.450E-07	-8.246E+05	0.1204	-4.494E-01
SILENE assembly wall thickness (cm)	2.887E-02	-1.367E+01	0.1132	-3.947E-01
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.490E+00	0.2057	-6.705E-01
SILENE assembly wall Cr content (wf)	5.774E-03	4.602E+00	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-1.351E+01	>0.50	negligible
Critical height (cm)	5.000E-04	-5.394E-01	0.0266	-2.697E-04
Solution concentration (g/L)	5.000E-02	-8.344E-01	0.4943	-4.172E-02
Solution density (g/cm ³)	5.451E-03	-7.903E+01	0.1367	-4.307E-01
Solution uranium enrichment (wf)	1.500E-05	-2.299E-01	0.1137	-3.449E-06
Solution temperature (deg C)	7.861E+00	8.479E-02	>0.50	negligible
Free Field X position in room (cm)	1.000E+00	1.211E-01	0.1716	1.211E-01
Free Field Y position in room (cm)	1.000E+00	2.503E-01	0.0694	2.503E-01
Free Field Z position in room (cm)	1.000E+00	-2.409E-02	>0.50	negligible
Free Field foil holder base thickness (cm)	2.887E-02	6.471E-01	>0.50	negligible
Free Field foil holder base density (g/cm ³)	3.425E-01	4.265E-01	>0.50	negligible
Free Field foil holder base Mg content (wf)	2.887E-03	2.431E+00	>0.50	negligible
Free Field foil holder back plate thickness (cm)	2.887E-02	5.902E-01	>0.50	negligible
Free Field foil holder back plate density (g/cm ³)	3.425E-01	1.005E-02	>0.50	negligible
Free Field foil holder back plate Mg content (wf)	2.887E-03	1.500E+00	>0.50	negligible
Free Field foil holder cover thickness (cm)	2.887E-02	-4.001E+00	>0.50	negligible
Free Field foil holder cover density (g/cm ³)	3.425E-01	-1.449E-01	>0.50	negligible
Free Field foil holder cover Mg content (wf)	2.887E-03	-1.201E-01	>0.50	negligible
Free Field Co foil thickness (cm)	1.155E-02	-1.182E+02	0.0526	-1.365E+00
Free Field Co foil radius (cm)	1.443E-02	-3.096E+00	>0.50	negligible
Free Field Co foil mass (g)	1.163E-02	-2.920E+00	0.0918	-3.395E-02
Total experimental uncertainty absolute (σ_{tot}^d)				4.401E+00
Total experimental uncertainty relative				0.0665

ALARM-TRAN-AIR-SHIELD-001

Table I-21. Case 3 Free Field $^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.511%			1.050E+03
Number of fissions	6.000%			4.170E+03
SILENE room concrete density (g/cm ³)	2.000E-01	1.253E+03	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	5.842E+05	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	9.879E+10	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.223E+04	0.2156	-3.530E+02
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.601E+03	0.3205	-7.204E+02
SILENE assembly wall Cr content (wf)	5.774E-03	4.020E+03	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-8.976E+03	>0.50	negligible
Critical height (cm)	5.000E-04	-5.346E+02	0.0498	-2.673E-01
Solution concentration (g/L)	5.000E-02	-1.368E+03	0.4663	-6.842E+01
Solution density (g/cm ³)	5.451E-03	-5.488E+04	0.3330	-2.991E+02
Solution uranium enrichment (wf)	1.500E-05	-1.490E+02	0.2975	-2.235E-03
Solution temperature (deg C)	7.861E+00	-6.683E+01	>0.50	negligible
Free Field X position in room (cm)	1.000E+00	7.629E+01	0.4536	7.629E+01
Free Field Y position in room (cm)	1.000E+00	2.745E+02	0.0986	2.745E+02
Free Field Z position in room (cm)	1.000E+00	-1.348E+01	>0.50	negligible
Free Field foil holder base thickness (cm)	2.887E-02	2.011E+03	>0.50	negligible
Free Field foil holder base density (g/cm ³)	3.425E-01	3.398E+02	>0.50	negligible
Free Field foil holder base Mg content (wf)	2.887E-03	-2.120E+03	>0.50	negligible
Free Field foil holder back plate thickness (cm)	2.887E-02	3.118E+03	>0.50	negligible
Free Field foil holder back plate density (g/cm ³)	3.425E-01	1.177E+02	>0.50	negligible
Free Field foil holder back plate Mg content (wf)	2.887E-03	6.900E+02	>0.50	negligible
Free Field foil holder cover thickness (cm)	2.887E-02	1.077E+03	>0.50	negligible
Free Field foil holder cover density (g/cm ³)	3.425E-01	2.978E+02	>0.50	negligible
Free Field foil holder cover Mg content (wf)	2.887E-03	3.040E+03	>0.50	negligible
Free Field Au foil thickness (cm)	1.443E-03	-7.041E+05	0.1188	-1.016E+03
Free Field Au foil radius (cm)	5.774E-03	-3.719E+02	>0.50	negligible
Free Field Au foil mass (g)	3.086E-03	-9.190E+02	0.2280	-2.836E+00
Total experimental uncertainty absolute (σ_{tot}^d)				4.510E+03
Total experimental uncertainty relative				0.0649

ALARM-TRAN-AIR-SHIELD-001

Table I-22. Case 3 Free Field $^{115}\text{In}(n,\gamma)^{116}\text{In}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	2.449%			2.150E+05
Number of fissions	6.000%			5.268E+05
SILENE room concrete density (g/cm ³)	2.000E-01	1.937E+04	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	1.488E+08	0.3715	1.562E+04
SILENE room concrete B content (wf)	5.450E-07	-9.216E+10	0.1834	-5.023E+04
SILENE assembly wall thickness (cm)	2.887E-02	-1.584E+06	0.1527	-4.571E+04
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.634E+05	0.3048	-7.353E+04
SILENE assembly wall Cr content (wf)	5.774E-03	-1.282E+06	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-2.601E+05	>0.50	negligible
Critical height (cm)	5.000E-04	-5.781E+04	0.0436	-2.891E+01
Solution concentration (g/L)	5.000E-02	-1.126E+05	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-7.146E+06	0.2496	-3.895E+04
Solution uranium enrichment (wf)	1.500E-05	-2.179E+04	0.1954	-3.268E-01
Solution temperature (deg C)	7.861E+00	-1.358E+04	>0.50	negligible
Free Field X position in room (cm)	1.000E+00	1.880E+04	0.1674	1.880E+04
Free Field Y position in room (cm)	1.000E+00	3.594E+04	0.0751	3.594E+04
Free Field Z position in room (cm)	1.000E+00	-2.976E+03	>0.50	negligible
Free Field foil holder base thickness (cm)	2.887E-02	6.084E+04	>0.50	negligible
Free Field foil holder base density (g/cm ³)	3.425E-01	1.734E+04	>0.50	negligible
Free Field foil holder base Mg content (wf)	2.887E-03	5.398E+04	>0.50	negligible
Free Field foil holder back plate thickness (cm)	2.887E-02	4.249E+04	>0.50	negligible
Free Field foil holder back plate density (g/cm ³)	3.425E-01	-1.117E+02	>0.50	negligible
Free Field foil holder back plate Mg content (wf)	2.887E-03	4.600E+04	>0.50	negligible
Free Field foil holder cover thickness (cm)	2.887E-02	-3.178E+05	>0.50	negligible
Free Field foil holder cover density (g/cm ³)	3.425E-01	-5.513E+03	>0.50	negligible
Free Field foil holder cover Mg content (wf)	2.887E-03	2.280E+05	>0.50	negligible
Free Field In foil thickness (cm)	5.773E-03	-3.942E+07	0.0495	-2.276E+05
Free Field In foil radius (cm)	1.443E-02	-6.652E+04	>0.50	negligible
Free Field In foil mass (g)	4.670E-03	-5.682E+05	0.0918	-2.654E+03
Total experimental uncertainty absolute (σ_{tot}^d)				6.237E+05
Total experimental uncertainty relative				0.0710

ALARM-TRAN-AIR-SHIELD-001

Table I-23. Case 3 Free Field $^{115}\text{In}(\text{n},\text{n}'\gamma)^{115m}\text{In}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.603%			1.100E+02
Number of fissions	6.000%			4.116E+02
SILENE room concrete density (g/cm ³)	2.000E-01	2.869E+01	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-6.417E+04	0.4172	-6.738E+00
SILENE room concrete B content (wf)	5.450E-07	8.623E+08	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-6.835E+02	0.1755	-1.973E+01
SILENE assembly wall density (g/cm ³)	4.500E-01	-4.054E+01	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	3.349E+01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-3.576E+02	>0.50	negligible
Critical height (cm)	5.000E-04	-1.429E+01	0.0792	-7.147E-03
Solution concentration (g/L)	5.000E-02	-6.350E+00	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-7.047E+03	0.1184	-3.841E+01
Solution uranium enrichment (wf)	1.500E-05	-5.722E-02	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-8.782E+00	>0.50	negligible
Free Field X position in room (cm)	1.000E+00	1.753E+01	0.0928	1.753E+01
Free Field Y position in room (cm)	1.000E+00	4.018E+01	0.0375	4.018E+01
Free Field Z position in room (cm)	1.000E+00	-3.839E+00	>0.50	negligible
Free Field foil holder base thickness (cm)	2.887E-02	3.040E+02	0.3842	8.775E+00
Free Field foil holder base density (g/cm ³)	3.425E-01	9.626E+01	>0.50	negligible
Free Field foil holder base Mg content (wf)	2.887E-03	-4.399E+01	>0.50	negligible
Free Field foil holder back plate thickness (cm)	2.887E-02	2.024E+02	>0.50	negligible
Free Field foil holder back plate density (g/cm ³)	3.425E-01	1.222E+01	>0.50	negligible
Free Field foil holder back plate Mg content (wf)	2.887E-03	1.100E+01	>0.50	negligible
Free Field foil holder cover thickness (cm)	2.887E-02	3.200E+02	>0.50	negligible
Free Field foil holder cover density (g/cm ³)	3.425E-01	1.251E+01	>0.50	negligible
Free Field foil holder cover Mg content (wf)	2.887E-03	-4.300E+01	>0.50	negligible
Free Field In foil thickness (cm)	5.773E-03	8.828E+01	>0.50	negligible
Free Field In foil radius (cm)	1.443E-02	-2.053E-01	>0.50	negligible
Free Field In foil mass (g)	4.670E-03	5.652E-01	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				4.306E+02
Total experimental uncertainty relative				0.0628

ALARM-TRAN-AIR-SHIELD-001

Table I-24. Case 3 Free Field $^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	2.065%			4.050E-03
Number of fissions	6.000%			1.177E-02
SILENE room concrete density (g/cm ³)	2.000E-01	6.289E-04	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-5.910E-01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	1.250E+03	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-2.905E-02	0.0949	-8.386E-04
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.749E-03	0.3192	-7.872E-04
SILENE assembly wall Cr content (wf)	5.774E-03	-1.600E-03	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-2.000E-03	>0.50	negligible
Critical height (cm)	5.000E-04	-2.667E-04	0.0998	-1.333E-07
Solution concentration (g/L)	5.000E-02	-2.568E-04	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-1.653E-01	0.1188	-9.007E-04
Solution uranium enrichment (wf)	1.500E-05	-1.090E-05	>0.50	negligible
Solution temperature (deg C)	7.861E+00	5.774E-05	>0.50	negligible
Free Field X position in room (cm)	1.000E+00	5.385E-04	0.0618	5.385E-04
Free Field Y position in room (cm)	1.000E+00	1.193E-03	0.0246	1.193E-03
Free Field Z position in room (cm)	1.000E+00	-1.516E-04	0.2787	-1.516E-04
Free Field foil holder base thickness (cm)	2.887E-02	3.832E-03	>0.50	negligible
Free Field foil holder base density (g/cm ³)	3.425E-01	1.140E-03	>0.50	negligible
Free Field foil holder base Mg content (wf)	2.887E-03	-9.282E-16	>0.50	negligible
Free Field foil holder back plate thickness (cm)	2.887E-02	1.750E-03	>0.50	negligible
Free Field foil holder back plate density (g/cm ³)	3.425E-01	4.097E-05	>0.50	negligible
Free Field foil holder back plate Mg content (wf)	2.887E-03	1.000E-04	>0.50	negligible
Free Field foil holder cover thickness (cm)	2.887E-02	-2.700E-03	>0.50	negligible
Free Field foil holder cover density (g/cm ³)	3.425E-01	-7.076E-05	>0.50	negligible
Free Field foil holder cover Mg content (wf)	2.887E-03	1.000E-04	>0.50	negligible
Free Field Fe foil thickness (cm)	1.732E-02	-6.667E-03	>0.50	negligible
Free Field Fe foil radius (cm)	1.443E-02	3.100E-03	>0.50	negligible
Free Field Fe foil mass (g)	1.458E-02	-1.190E-04	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.260E-02
Total experimental uncertainty relative				0.0642

ALARM-TRAN-AIR-SHIELD-001

Table I-25. Case 3 Free Field $^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn}$ + $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity Value (S_i^d)	Unc	σ_i^d
Measurement uncertainty	1.394%			3.350E+01
Number of fissions	6.000%			1.442E+02
SILENE room concrete density (g/cm ³)	2.000E-01	5.688E+01	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	6.284E+04	0.2449	6.598E+00
SILENE room concrete B content (wf)	5.450E-07	-2.840E+07	0.1839	-1.548E+01
SILENE assembly wall thickness (cm)	2.887E-02	-6.100E+02	0.1132	-1.761E+01
SILENE assembly wall density (g/cm ³)	4.500E-01	-4.666E+01	0.3288	-2.100E+01
SILENE assembly wall Cr content (wf)	5.774E-03	2.377E+02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-1.770E+02	>0.50	negligible
Critical height (cm)	5.000E-04	-1.861E+01	0.0352	-9.307E-03
Solution concentration (g/L)	5.000E-02	-3.345E+01	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-3.068E+03	0.1657	-1.672E+01
Solution uranium enrichment (wf)	1.500E-05	-7.188E+00	0.1712	-1.078E-04
Solution temperature (deg C)	7.861E+00	5.501E+00	>0.50	negligible
Free Field X position in room (cm)	1.000E+00	2.226E+00	>0.50	negligible
Free Field Y position in room (cm)	1.000E+00	8.218E+00	0.0934	8.218E+00
Free Field Z position in room (cm)	1.000E+00	-6.407E-02	>0.50	negligible
Free Field foil holder base thickness (cm)	2.887E-02	6.715E+01	>0.50	negligible
Free Field foil holder base density (g/cm ³)	3.425E-01	9.920E+00	>0.50	negligible
Free Field foil holder base Mg content (wf)	2.887E-03	1.605E+02	>0.50	negligible
Free Field foil holder back plate thickness (cm)	2.887E-02	-1.108E+02	>0.50	negligible
Free Field foil holder back plate density (g/cm ³)	3.425E-01	-3.240E+00	>0.50	negligible
Free Field foil holder back plate Mg content (wf)	2.887E-03	3.900E+00	>0.50	negligible
Free Field foil holder cover thickness (cm)	2.887E-02	-2.240E+01	>0.50	negligible
Free Field foil holder cover density (g/cm ³)	3.425E-01	-7.777E+00	>0.50	negligible
Free Field foil holder cover Mg content (wf)	2.887E-03	1.859E+01	>0.50	negligible
Free Field Fe foil thickness (cm)	1.732E-02	-2.552E+02	>0.50	negligible
Free Field Fe foil radius (cm)	1.443E-02	7.151E+01	>0.50	negligible
Free Field Fe foil mass (g)	1.458E-02	-9.635E+00	>0.50	negligible
Free Field Fe foil Mn content (wf)	5.000E-05	-3.800E+01	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.526E+02
Total experimental uncertainty relative				0.0635

ALARM-TRAN-AIR-SHIELD-001

Table I-26. Case 3 Free Field $^{24}\text{Mg}(\text{n},\text{p})^{24}\text{Na}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	2.030%			1.200E+00
Number of fissions	6.000%			3.546E+00
SILENE room concrete density (g/cm ³)	2.000E-01	-1.425E-01	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-8.496E+01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-1.038E+06	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.153E+01	0.2180	-3.327E-01
SILENE assembly wall density (g/cm ³)	4.500E-01	-7.619E-01	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-4.250E-01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-3.451E-01	>0.50	negligible
Critical height (cm)	5.000E-04	-5.557E-02	0.4356	-2.779E-05
Solution concentration (g/L)	5.000E-02	-4.118E-02	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-5.447E+01	0.3254	-2.969E-01
Solution uranium enrichment (wf)	1.500E-05	-2.036E-04	>0.50	negligible
Solution temperature (deg C)	7.861E+00	1.539E-01	>0.50	negligible
Free Field X position in room (cm)	1.000E+00	2.060E-01	0.1034	2.060E-01
Free Field Y position in room (cm)	1.000E+00	4.226E-01	0.0346	4.226E-01
Free Field Z position in room (cm)	1.000E+00	-3.135E-02	>0.50	negligible
Free Field foil holder base thickness (cm)	2.887E-02	2.881E-01	>0.50	negligible
Free Field foil holder base density (g/cm ³)	3.425E-01	1.743E-01	>0.50	negligible
Free Field foil holder base Mg content (wf)	2.887E-03	-1.100E-01	>0.50	negligible
Free Field foil holder back plate thickness (cm)	2.887E-02	4.900E-01	>0.50	negligible
Free Field foil holder back plate density (g/cm ³)	3.425E-01	4.469E-03	>0.50	negligible
Free Field foil holder back plate Mg content (wf)	2.887E-03	6.000E-02	>0.50	negligible
Free Field foil holder cover thickness (cm)	2.887E-02	-3.316E+00	>0.50	negligible
Free Field foil holder cover density (g/cm ³)	3.425E-01	-1.687E-01	>0.50	negligible
Free Field foil holder cover Mg content (wf)	2.887E-03	-2.900E-01	>0.50	negligible
Free Field Mg foil thickness (cm)	1.155E-02	-1.325E+00	>0.50	negligible
Free Field Mg foil radius (cm)	1.443E-02	-1.966E+00	>0.50	negligible
Free Field Mg foil mass (g)	2.178E-03	-1.415E-01	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				3.799E+00
Total experimental uncertainty relative				0.0643

ALARM-TRAN-AIR-SHIELD-001

Table I-27. Case 3 Free Field $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.578%			2.050E-01
Number of fissions	6.000%			7.794E-01
SILENE room concrete density (g/cm ³)	2.000E-01	-4.996E-03	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-3.126E+01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	1.749E+05	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.923E+00	0.0935	-5.552E-02
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.190E-01	0.3062	-5.354E-02
SILENE assembly wall Cr content (wf)	5.774E-03	2.999E-02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-3.998E-02	>0.50	negligible
Critical height (cm)	5.000E-04	-1.826E-02	0.0951	-9.130E-06
Solution concentration (g/L)	5.000E-02	-1.349E-02	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-1.182E+01	0.1084	-6.443E-02
Solution uranium enrichment (wf)	1.500E-05	1.620E-04	>0.50	negligible
Solution temperature (deg C)	7.861E+00	4.198E-03	>0.50	negligible
Free Field X position in room (cm)	1.000E+00	3.965E-02	0.0576	3.965E-02
Free Field Y position in room (cm)	1.000E+00	7.709E-02	0.0256	7.709E-02
Free Field Z position in room (cm)	1.000E+00	-9.393E-03	0.3274	-9.393E-03
Free Field foil holder base thickness (cm)	2.887E-02	2.594E-01	>0.50	negligible
Free Field foil holder base density (g/cm ³)	3.425E-01	8.488E-02	>0.50	negligible
Free Field foil holder base Mg content (wf)	2.887E-03	-1.200E-01	>0.50	negligible
Free Field foil holder back plate thickness (cm)	2.887E-02	9.000E-02	>0.50	negligible
Free Field foil holder back plate density (g/cm ³)	3.425E-01	6.704E-03	>0.50	negligible
Free Field foil holder back plate Mg content (wf)	2.887E-03	1.528E-13	>0.50	negligible
Free Field foil holder cover thickness (cm)	2.887E-02	-1.267E-01	>0.50	negligible
Free Field foil holder cover density (g/cm ³)	3.425E-01	3.352E-03	>0.50	negligible
Free Field foil holder cover Mg content (wf)	2.887E-03	-1.000E-02	>0.50	negligible
Free Field Ni foil thickness (cm)	5.773E-03	-2.350E-01	>0.50	negligible
Free Field Ni foil radius (cm)	1.443E-02	-9.606E-03	>0.50	negligible
Free Field Ni foil mass (g)	5.614E-03	8.981E-04	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				8.168E-01
Total experimental uncertainty relative				0.0629

ALARM-TRAN-AIR-SHIELD-001

Table I-28. Case 3 Free Field Al₂O₃ TLD Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	5.000%			1.860E-01
Number of fissions	6.000%			2.232E-01
SILENE room concrete density (g/cm ³)	2.000E-01	-1.693E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	2.293E+01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	1.546E+06	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-6.898E-01	0.2530	-1.991E-02
SILENE assembly wall density (g/cm ³)	4.500E-01	-2.141E-02	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-3.283E-01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	3.656E-01	>0.50	negligible
Critical height (cm)	5.000E-04	1.983E-02	0.0865	9.913E-06
Solution concentration (g/L)	5.000E-02	6.187E-03	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-5.952E-02	>0.50	negligible
Solution uranium enrichment (wf)	1.500E-05	6.224E-03	0.3479	9.335E-08
Solution temperature (deg C)	7.861E+00	-1.852E-03	>0.50	negligible
Free Field X position in room (cm)	1.000E+00	1.392E-02	0.1251	1.392E-02
Free Field Y position in room (cm)	1.000E+00	2.740E-02	0.0473	2.740E-02
Free Field Z position in room (cm)	1.000E+00	-7.195E-03	0.2890	-7.195E-03
Free Field foil holder base thickness (cm)	2.887E-02	5.331E-02	>0.50	negligible
Free Field foil holder base density (g/cm ³)	3.425E-01	-6.294E-03	>0.50	negligible
Free Field foil holder base Mg content (wf)	2.887E-03	-2.900E-02	>0.50	negligible
Free Field foil holder back plate thickness (cm)	2.887E-02	4.500E-03	>0.50	negligible
Free Field foil holder back plate density (g/cm ³)	3.425E-01	9.683E-04	>0.50	negligible
Free Field foil holder back plate Mg content (wf)	2.887E-03	-6.999E-03	>0.50	negligible
Free Field foil holder cover thickness (cm)	2.887E-02	4.200E-02	>0.50	negligible
Free Field foil holder cover density (g/cm ³)	3.425E-01	3.352E-04	>0.50	negligible
Free Field foil holder cover Mg content (wf)	2.887E-03	-4.500E-02	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				2.929E-01
Total experimental uncertainty relative				0.0787

ALARM-TRAN-AIR-SHIELD-001

I.4 Case 4 Scattering Box Position 1 Uncertainties

Table I-29. Case 4 Scattering Box 1 $^{59}\text{Co}(n,\gamma)^{60}\text{Co}$ Experimental Uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.190%			2.650E-01
Number of fissions	6.000%			1.336E+00
Scattering Box plastic bags	2.000%			4.454E-01
SILENE room concrete density (g/cm ³)	2.000E-01	3.972E-01	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	7.902E+00	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-3.515E+05	0.0641	-1.916E-01
SILENE assembly wall thickness (cm)	2.887E-02	-3.903E+00	0.0901	-1.127E-01
SILENE assembly wall density (g/cm ³)	4.500E-01	-3.211E-01	0.2222	-1.445E-01
SILENE assembly wall Cr content (wf)	5.774E-03	6.003E-01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-1.926E+00	>0.50	negligible
Critical height (cm)	5.000E-04	-2.739E-01	0.0125	-1.370E-04
Solution concentration (g/L)	5.000E-02	-1.790E-01	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-2.276E+01	0.1140	-1.241E-01
Solution uranium enrichment (wf)	1.500E-05	-2.835E-02	0.2224	-4.252E-07
Solution temperature (deg C)	7.861E+00	7.886E-02	0.3785	6.199E-01
Scattering Box 1 X position in room (cm)	1.000E+00	-2.036E-02	0.2470	-2.036E-02
Scattering Box 1 Y position in room (cm)	1.000E+00	-2.844E-02	0.1296	-2.844E-02
Scattering Box 1 Z position in room (cm)	1.000E+00	1.710E-03	>0.50	negligible
Scattering Box 1 Al mounting plate thickness (cm)	2.887E-02	-2.733E+00	>0.50	negligible
Scattering Box 1 Al mounting plate density (g/cm ³)	3.500E-01	2.961E-03	>0.50	negligible
Scattering Box 1 Co foil thickness (cm)	1.155E-02	-4.923E+01	0.0287	-5.685E-01
Scattering Box 1 Co foil radius (cm)	1.443E-02	-2.786E+00	>0.50	negligible
Scattering Box 1 Co foil mass (g)	1.161E-02	-1.279E+00	0.0494	-1.485E-02
Scattering Box S235JR density (g/cm ³)	4.250E-01	-7.738E-02	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	-1.800E+01	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-1.253E+02	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-6.276E+00	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	-9.250E-02	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-2.004E-01	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	2.168E+02	0.4061	1.084E-02
Standard concrete Si content (wf)	5.000E-05	-5.193E+00	0.4161	-2.597E-04
Standard concrete Al content (wf)	5.000E-05	-1.533E+01	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-2.633E+01	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	3.400E+02	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-1.166E+01	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	3.122E+02	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	5.830E-02	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-1.604E+00	0.0900	-3.128E-01
Magnetite concrete H content (wf)	5.000E-05	4.338E+02	0.4355	2.169E-02
Magnetite concrete Si content (wf)	5.000E-05	-2.315E+01	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	-1.161E+02	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-1.243E+01	0.0856	-6.216E-04
Magnetite concrete Cl content (wf)	5.000E-05	1.073E+04	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	-8.353E+00	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	-9.169E+01	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.717E+00
Total experimental uncertainty relative				0.0771

ALARM-TRAN-AIR-SHIELD-001

Table I-30. Case 4 scattering box 1 $^{197}\text{Au}(\text{n},\gamma)^{198}\text{Au}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.512%			3.650E+02
Number of fissions	6.000%			1.448E+03
Scattering Box plastic bags	2.000%			4.828E+02
SILENE room concrete density (g/cm ³)	2.000E-01	8.751E+01	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-3.306E+05	0.3072	-3.471E+01
SILENE room concrete B content (wf)	5.450E-07	-2.975E+08	0.1007	-1.621E+02
SILENE assembly wall thickness (cm)	2.887E-02	-3.931E+03	0.1122	-1.135E+02
SILENE assembly wall density (g/cm ³)	4.500E-01	-2.142E+02	0.4173	-9.638E+01
SILENE assembly wall Cr content (wf)	5.774E-03	2.317E+03	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-2.951E+02	>0.50	negligible
Critical height (cm)	5.000E-04	-2.701E+02	0.0167	-1.350E-01
Solution concentration (g/L)	5.000E-02	-4.084E+01	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-2.257E+04	0.1393	-1.230E+02
Solution uranium enrichment (wf)	1.500E-05	-1.819E+01	0.4317	-2.728E-04
Solution temperature (deg C)	7.861E+00	3.398E+01	>0.50	negligible
Scattering Box 1 X position in room (cm)	1.000E+00	-1.831E+01	0.3573	-1.831E+01
Scattering Box 1 Y position in room (cm)	1.000E+00	-2.692E+01	0.1800	-2.692E+01
Scattering Box 1 Z position in room (cm)	1.000E+00	-4.649E+00	>0.50	negligible
Scattering Box 1 Al mounting plate thickness (cm)	2.887E-02	-4.200E+02	>0.50	negligible
Scattering Box 1 Al mounting plate density (g/cm ³)	3.500E-01	4.251E+01	>0.50	negligible
Scattering Box 1 Au foil thickness (cm)	1.443E-03	-7.489E+05	0.0013	-1.081E+03
Scattering Box 1 Au foil radius (cm)	1.443E-02	4.634E+02	>0.50	negligible
Scattering Box 1 Au foil mass (g)	3.168E-03	-3.587E+02	0.1007	-1.136E+00
Scattering Box S235JR density (g/cm ³)	4.250E-01	-6.859E+01	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	2.317E+04	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	1.942E+04	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-6.967E+04	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	-3.880E+01	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-3.612E+02	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	2.218E+05	0.4968	1.109E+01
Standard concrete Si content (wf)	5.000E-05	-1.240E+03	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	8.979E+04	0.2224	4.489E+00
Standard concrete Fe content (wf)	5.000E-05	-2.189E+04	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	-1.800E+05	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-6.117E+02	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-2.932E+05	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	6.520E+01	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-1.856E+03	0.0973	-3.619E+02
Magnetite concrete H content (wf)	5.000E-05	-1.296E+05	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	4.110E+03	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	4.039E+03	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-8.415E+03	0.1621	-4.208E-01
Magnetite concrete Cl content (wf)	5.000E-05	-5.059E+06	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	1.777E+04	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	1.416E+05	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.957E+03
Total experimental uncertainty relative				0.0811

ALARM-TRAN-AIR-SHIELD-001

Table I-31. Case 4 scattering box 1 $^{115}\text{In}(n,\gamma)^{116}\text{In}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.845%			5.000E+04
Number of fissions	6.000%			1.626E+05
Scattering Box plastic bags	2.000%			5.420E+04
SILENE room concrete density (g/cm ³)	2.000E-01	5.604E+04	0.4940	1.121E+04
SILENE room concrete H content (wf)	1.050E-04	-1.445E+07	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-3.688E+10	0.0697	-2.010E+04
SILENE assembly wall thickness (cm)	2.887E-02	-4.848E+05	0.0889	-1.400E+04
SILENE assembly wall density (g/cm ³)	4.500E-01	-2.495E+04	0.3369	-1.123E+04
SILENE assembly wall Cr content (wf)	5.774E-03	6.909E+04	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-8.100E+04	>0.50	negligible
Critical height (cm)	5.000E-04	-3.088E+04	0.0131	-1.544E+01
Solution concentration (g/L)	5.000E-02	-7.499E+03	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-2.857E+06	0.1036	-1.557E+04
Solution uranium enrichment (wf)	1.500E-05	-1.932E+03	0.3713	-2.899E-02
Solution temperature (deg C)	7.861E+00	2.470E+03	>0.50	negligible
Scattering Box 1 X position in room (cm)	1.000E+00	-3.254E+03	0.1893	-3.254E+03
Scattering Box 1 Y position in room (cm)	1.000E+00	-3.148E+03	0.1409	-3.148E+03
Scattering Box 1 Z position in room (cm)	1.000E+00	6.003E+02	>0.50	negligible
Scattering Box 1 Al mounting plate thickness (cm)	2.887E-02	-2.655E+05	>0.50	negligible
Scattering Box 1 Al mounting plate density (g/cm ³)	3.500E-01	4.625E+03	>0.50	negligible
Scattering Box 1 In foil thickness (cm)	5.773E-03	-1.563E+07	0.0213	-9.025E+04
Scattering Box 1 In foil radius (cm)	5.774E-03	-2.135E+05	>0.50	negligible
Scattering Box 1 In foil mass (g)	4.896E-03	-2.196E+05	0.0389	-1.075E+03
Scattering Box S235JR density (g/cm ³)	4.250E-01	-1.611E+04	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	-4.176E+05	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-4.767E+06	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-1.172E+06	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	-7.660E+03	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-3.344E+04	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	1.642E+07	>0.50	negligible
Standard concrete Si content (wf)	5.000E-05	-2.491E+05	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	4.879E+05	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-3.063E+06	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	1.399E+07	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-1.290E+05	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-4.596E+07	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	-1.230E+03	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-1.889E+05	0.0902	-3.683E+04
Magnetite concrete H content (wf)	5.000E-05	-9.007E+06	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	-1.835E+05	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	6.740E+06	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-1.114E+06	0.1088	-5.568E+01
Magnetite concrete Cl content (wf)	5.000E-05	-1.100E+08	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	1.535E+05	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	-2.767E+07	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				2.061E+05
Total experimental uncertainty relative				0.0761

ALARM-TRAN-AIR-SHIELD-001

Table I-32. Case 4 scattering box 1 $^{115}\text{In}(n,n'\gamma)^{115m}\text{In}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.619%			8.500E+00
Number of fissions	6.000%			3.150E+01
Scattering Box plastic bags	2.000%			1.050E+01
SILENE room concrete density (g/cm ³)	2.000E-01	1.363E+00	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-1.256E+04	0.3399	-1.318E+00
SILENE room concrete B content (wf)	5.450E-07	7.790E+07	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-5.437E+01	0.3564	-1.569E+00
SILENE assembly wall density (g/cm ³)	4.500E-01	-6.844E+00	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	8.290E+00	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	5.947E+01	>0.50	negligible
Critical height (cm)	5.000E-04	-1.743E+00	0.1018	-8.717E-04
Solution concentration (g/L)	5.000E-02	-2.894E+00	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-5.955E+02	0.2228	-3.246E+00
Solution uranium enrichment (wf)	1.500E-05	5.117E-02	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-8.145E-01	>0.50	negligible
Scattering Box 1 X position in room (cm)	1.000E+00	-7.299E-01	0.2700	-7.299E-01
Scattering Box 1 Y position in room (cm)	1.000E+00	-1.375E+00	0.1102	-1.375E+00
Scattering Box 1 Z position in room (cm)	1.000E+00	-2.294E-01	>0.50	negligible
Scattering Box 1 Al mounting plate thickness (cm)	2.887E-02	6.585E+00	>0.50	negligible
Scattering Box 1 Al mounting plate density (g/cm ³)	3.500E-01	-1.308E+00	>0.50	negligible
Scattering Box 1 In foil thickness (cm)	5.773E-03	-6.140E+00	>0.50	negligible
Scattering Box 1 In foil radius (cm)	5.774E-03	3.038E+01	>0.50	negligible
Scattering Box 1 In foil mass (g)	4.896E-03	-6.332E-01	>0.50	negligible
Scattering Box S235JR density (g/cm ³)	4.250E-01	-9.138E-01	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	1.044E+03	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-1.022E+04	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	1.470E+03	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	-3.130E+00	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	6.630E+00	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	-7.545E+03	>0.50	negligible
Standard concrete Si content (wf)	5.000E-05	-7.841E+01	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	-5.952E+01	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	7.200E+02	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	-9.223E+04	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-1.885E+01	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	1.127E+04	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	-7.620E-01	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-2.074E+02	0.0374	-4.045E+01
Magnetite concrete H content (wf)	5.000E-05	-4.638E+04	0.2036	-2.319E+00
Magnetite concrete Si content (wf)	5.000E-05	3.868E+02	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	-5.862E+03	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	3.261E+02	0.1665	1.630E-02
Magnetite concrete Cl content (wf)	5.000E-05	-3.055E+04	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	1.764E+02	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	-1.298E+04	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				5.323E+01
Total experimental uncertainty relative				0.1014

ALARM-TRAN-AIR-SHIELD-001

Table I-33. Case 4 scattering box 1 $^{54}\text{Fe}(\text{n},\text{p})^{54}\text{Mn}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	3.686%			3.900E-04
Number of fissions	6.000%			6.348E-04
Scattering Box plastic bags	2.000%			2.116E-04
SILENE room concrete density (g/cm ³)	2.000E-01	1.502E-04	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-5.120E-02	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-1.462E+03	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.596E-03	0.2208	-4.607E-05
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.237E-04	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-7.502E-05	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-4.001E-04	>0.50	negligible
Critical height (cm)	5.000E-04	-2.014E-05	0.1649	-1.007E-08
Solution concentration (g/L)	5.000E-02	2.495E-06	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-1.189E-02	0.2084	-6.479E-05
Solution uranium enrichment (wf)	1.500E-05	6.584E-07	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-8.945E-07	>0.50	negligible
Scattering Box 1 X position in room (cm)	1.000E+00	-2.403E-05	0.1380	-2.403E-05
Scattering Box 1 Y position in room (cm)	1.000E+00	-3.234E-05	0.0802	-3.234E-05
Scattering Box 1 Z position in room (cm)	1.000E+00	1.796E-06	>0.50	negligible
Scattering Box 1 Al mounting plate thickness (cm)	2.887E-02	-1.612E-03	>0.50	negligible
Scattering Box 1 Al mounting plate density (g/cm ³)	3.500E-01	1.995E-05	>0.50	negligible
Scattering Box 1 Fe foil thickness (cm)	1.732E-02	-3.537E-04	>0.50	negligible
Scattering Box 1 Fe foil radius (cm)	1.443E-02	2.961E-04	>0.50	negligible
Scattering Box 1 Fe foil mass (g)	1.456E-02	-1.348E-05	>0.50	negligible
Scattering Box S235JR density (g/cm ³)	4.250E-01	-1.375E-05	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	-5.160E-03	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	9.133E-02	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-1.281E-02	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	2.610E-05	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-6.257E-05	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	1.300E-02	>0.50	negligible
Standard concrete Si content (wf)	5.000E-05	-2.332E-04	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	-1.143E-02	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	4.527E-04	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	-2.000E-02	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	5.119E-03	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	2.250E-02	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	-9.500E-06	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-5.227E-03	0.0280	-1.019E-03
Magnetite concrete H content (wf)	5.000E-05	-7.614E-01	0.2318	-3.807E-05
Magnetite concrete Si content (wf)	5.000E-05	-1.761E-03	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	-8.733E-02	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	7.491E-03	0.1351	3.745E-07
Magnetite concrete Cl content (wf)	5.000E-05	2.838E+00	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	5.329E-03	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	7.029E-02	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.284E-03
Total experimental uncertainty relative				0.1213

ALARM-TRAN-AIR-SHIELD-001

Table I-34. Case 4 scattering box 1 $^{56}\text{Fe}(\text{n},\text{p})^{56}\text{Mn}$ + $^{55}\text{Mn}(\text{n},\gamma)^{56}\text{Mn}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.297%			1.100E+01
Number of fissions	6.000%			5.088E+01
Scattering Box plastic bags	2.000%			1.696E+01
SILENE room concrete density (g/cm ³)	2.000E-01	-7.910E+00	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	3.356E+03	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-1.438E+07	0.0729	-7.839E+00
SILENE assembly wall thickness (cm)	2.887E-02	-1.708E+02	0.0955	-4.931E+00
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.100E+01	0.3011	-4.950E+00
SILENE assembly wall Cr content (wf)	5.774E-03	-6.592E+01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-2.759E+01	>0.50	negligible
Critical height (cm)	5.000E-04	-9.788E+00	0.0158	-4.894E-03
Solution concentration (g/L)	5.000E-02	-8.780E+00	0.4965	-4.390E-01
Solution density (g/cm ³)	5.451E-03	-8.051E+02	0.1662	-4.388E+00
Solution uranium enrichment (wf)	1.500E-05	-9.293E-01	0.3037	-1.394E-05
Solution temperature (deg C)	7.861E+00	6.746E-01	>0.50	negligible
Scattering Box 1 X position in room (cm)	1.000E+00	-7.439E-01	0.2574	-7.439E-01
Scattering Box 1 Y position in room (cm)	1.000E+00	-1.238E+00	0.1149	-1.238E+00
Scattering Box 1 Z position in room (cm)	1.000E+00	1.791E-01	>0.50	negligible
Scattering Box 1 Al mounting plate thickness (cm)	2.887E-02	3.056E+00	>0.50	negligible
Scattering Box 1 Al mounting plate density (g/cm ³)	3.500E-01	2.387E+00	>0.50	negligible
Scattering Box 1 Fe foil thickness (cm)	1.732E-02	-1.449E+02	0.2954	-2.510E+00
Scattering Box 1 Fe foil radius (cm)	1.443E-02	-6.981E+01	>0.50	negligible
Scattering Box 1 Fe foil mass (g)	1.456E-02	-7.805E+00	0.4343	-1.136E-01
Scattering Box 1 Fe foil Mn content (wf)	5.000E-05	3.945E+00	>0.50	negligible
Scattering Box S235JR density (g/cm ³)	4.250E-01	-7.170E+00	0.4649	-3.047E+00
Scattering Box S235JR Mn content (wf)	3.300E-03	3.329E+02	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-7.553E+03	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	3.459E+01	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	2.020E+00	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-2.631E+01	0.4318	-3.026E+00
Standard concrete H content (wf)	5.000E-05	1.312E+04	0.3113	6.562E-01
Standard concrete Si content (wf)	5.000E-05	-1.737E+02	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	-1.523E+02	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-4.475E+02	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	1.217E+05	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-3.768E+02	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	1.851E+04	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	-3.200E-01	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-4.257E+01	0.1529	-8.301E+00
Magnetite concrete H content (wf)	5.000E-05	1.072E+04	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	3.618E+02	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	1.045E+03	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-3.885E+02	0.1190	-1.942E-02
Magnetite concrete Cl content (wf)	5.000E-05	-9.643E+04	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	2.161E+02	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	-9.224E+03	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				5.677E+01
Total experimental uncertainty relative				0.0670

ALARM-TRAN-AIR-SHIELD-001

Table I-35. Case 4 scattering box 1 $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.771%			1.250E-02
Number of fissions	6.000%			4.236E-02
Scattering Box plastic bags	2.000%			1.412E-02
SILENE room concrete density (g/cm ³)	2.000E-01	-5.256E-03	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-4.232E+00	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-5.504E+04	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.229E-01	0.1872	-3.549E-03
SILENE assembly wall density (g/cm ³)	4.500E-01	-7.897E-03	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-6.738E-02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	6.305E-02	>0.50	negligible
Critical height (cm)	5.000E-04	-1.350E-03	0.1633	-6.748E-07
Solution concentration (g/L)	5.000E-02	-1.486E-04	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-6.158E-01	0.2659	-3.356E-03
Solution uranium enrichment (wf)	1.500E-05	-5.402E-07	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-3.468E-04	>0.50	negligible
Scattering Box 1 X position in room (cm)	1.000E+00	-1.572E-03	0.1431	-1.572E-03
Scattering Box 1 Y position in room (cm)	1.000E+00	-2.573E-03	0.0667	-2.573E-03
Scattering Box 1 Z position in room (cm)	1.000E+00	-7.583E-04	>0.50	negligible
Scattering Box 1 Al mounting plate thickness (cm)	2.887E-02	3.971E-02	>0.50	negligible
Scattering Box 1 Al mounting plate density (g/cm ³)	3.500E-01	1.480E-03	>0.50	negligible
Scattering Box 1 Ni foil thickness (cm)	1.155E-02	-6.237E-02	>0.50	negligible
Scattering Box 1 Ni foil radius (cm)	1.443E-02	1.006E-02	>0.50	negligible
Scattering Box 1 Ni foil mass (g)	1.151E-02	-1.860E-03	>0.50	negligible
Scattering Box S235JR density (g/cm ³)	4.250E-01	-3.137E-04	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	8.654E-01	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	2.056E+00	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-2.619E-01	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	8.220E-04	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-8.081E-03	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	-1.048E+01	>0.50	negligible
Standard concrete Si content (wf)	5.000E-05	-1.358E-02	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	-3.999E-01	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-9.503E-01	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	-2.800E+01	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	8.196E-02	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-1.649E+00	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	5.785E-03	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-3.386E-01	0.0278	-6.603E-02
Magnetite concrete H content (wf)	5.000E-05	-5.696E+01	0.2024	-2.848E-03
Magnetite concrete Si content (wf)	5.000E-05	-6.302E-01	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	-3.868E+00	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	4.055E-01	0.1622	2.028E-05
Magnetite concrete Cl content (wf)	5.000E-05	4.469E+02	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	1.305E+00	0.4781	6.526E-05
Magnetite concrete Mn content (wf)	5.000E-05	3.724E+00	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				8.094E-02
Total experimental uncertainty relative				0.1146

ALARM-TRAN-AIR-SHIELD-001

Table I-36. Case 4 scattering box 1 Al₂O₃ TLD experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	5.000%			2.900E-02
Number of fissions	6.000%			3.480E-02
SILENE room concrete density (g/cm ³)	2.000E-01	1.294E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	1.617E+00	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	2.399E+05	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-5.850E-02	>0.50	negligible
SILENE assembly wall density (g/cm ³)	4.500E-01	-2.395E-03	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-1.256E-01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	3.498E-02	>0.50	negligible
Critical height (cm)	5.000E-04	-1.516E-03	0.2084	-7.580E-07
Solution concentration (g/L)	5.000E-02	-9.800E-04	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-3.065E-01	>0.50	negligible
Solution uranium enrichment (wf)	1.500E-05	-1.121E-04	>0.50	negligible
Solution temperature (deg C)	7.861E+00	1.107E-03	>0.50	negligible
Scattering Box 1 X position in room (cm)	1.000E+00	-6.755E-04	0.4751	-6.755E-04
Scattering Box 1 Y position in room (cm)	1.000E+00	-6.864E-04	>0.50	negligible
Scattering Box 1 Z position in room (cm)	1.000E+00	-5.587E-04	>0.50	negligible
Scattering Box 1 Al mounting plate thickness (cm)	2.887E-02	2.395E-02	>0.50	negligible
Scattering Box 1 Al mounting plate density (g/cm ³)	3.500E-01	-4.273E-03	>0.50	negligible
Scattering Box S235JR density (g/cm ³)	4.250E-01	1.918E-03	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	-1.114E+00	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	3.519E+00	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-3.889E+00	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	3.032E-03	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-7.789E-03	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	-4.551E+00	>0.50	negligible
Standard concrete Si content (wf)	5.000E-05	1.539E-01	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	1.583E-01	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-1.817E-01	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	2.335E+01	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-3.091E-01	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-3.550E+01	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	5.592E-03	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-9.712E-02	0.1351	-1.894E-02
Magnetite concrete H content (wf)	5.000E-05	6.842E+00	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	-2.725E+00	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	1.315E+01	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	4.540E-02	>0.50	negligible
Magnetite concrete Cl content (wf)	5.000E-05	-2.197E+02	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	-1.035E-01	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	3.588E+00	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				4.910E-02
Total experimental uncertainty relative				0.0847

ALARM-TRAN-AIR-SHIELD-001

I.5 Case 5 Scattering Box Position 2 Uncertainties

Table I-37. Case 5 scattering box 2 $^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.094%			2.800E-01
Number of fissions	6.000%			1.535E+00
Scattering Box plastic bags	2.000%			5.118E-01
SILENE room concrete density (g/cm ³)	2.000E-01	4.181E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-6.439E+01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-4.064E+05	5.322E-02	-2.215E-01
SILENE assembly wall thickness (cm)	2.887E-02	-4.878E+00	6.464E-02	-1.408E-01
SILENE assembly wall density (g/cm ³)	4.500E-01	-3.681E-01	0.1733	-1.656E-01
SILENE assembly wall Cr content (wf)	5.774E-03	1.305E+00	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-1.653E+00	>0.50	negligible
Critical height (cm)	5.000E-04	-4.289E-01	7.304E-03	-2.145E-04
Solution concentration (g/L)	5.000E-02	-1.254E-01	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-2.425E+01	0.0880	-1.322E-01
Solution uranium enrichment (wf)	1.500E-05	-2.947E-02	1.759E-01	-4.421E-07
Solution temperature (deg C)	7.861E+00	-6.725E-03	>0.50	negligible
Scattering Box 2 X position in room (cm)	1.000E+00	-2.013E-02	2.024E-01	-2.013E-02
Scattering Box 2 Y position in room (cm)	1.000E+00	-2.004E-02	2.010E-01	-2.004E-02
Scattering Box 2 Z position in room (cm)	1.000E+00	-1.155E-02	>0.50	negligible
Scattering Box 2 block orientation (deg)	1.000E+00	3.300E-03	>0.50	negligible
Scattering Box 2 Al mounting plate thickness (cm)	2.887E-02	2.451E-01	>0.50	negligible
Scattering Box 2 Al mounting plate density (g/cm ³)	3.500E-01	8.433E-02	>0.50	negligible
Scattering Box 2 Co foil thickness (cm)	1.155E-02	-5.688E+01	2.234E-02	-6.568E-01
Scattering Box 2 Co foil radius (cm)	1.443E-02	-2.579E+00	>0.50	negligible
Scattering Box 2 Co foil mass (g)	1.620E-03	-1.494E+00	3.669E-02	-2.420E-03
Scattering Box S235JR density (g/cm ³)	4.250E-01	-1.003E-01	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	-5.901E+00	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-8.879E+01	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	7.096E+01	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	1.247E-01	0.3844	3.600E-03
Standard concrete density (g/cm ³)	1.150E-01	-1.867E+00	1.116E-01	-2.147E-01
Standard concrete H content (wf)	5.000E-05	4.988E+02	1.580E-01	2.494E-02
Standard concrete Si content (wf)	5.000E-05	-4.010E+00	4.653E-01	-2.005E-04
Standard concrete Al content (wf)	5.000E-05	-8.936E+00	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-7.806E+00	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	-1.721E+03	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-6.362E+00	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-6.362E+02	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	2.740E-02	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-8.267E-01	1.562E-01	-1.612E-01
Magnetite concrete H content (wf)	5.000E-05	-1.264E+01	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	2.655E+01	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	2.825E+01	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-5.965E+00	1.613E-01	-2.982E-04
Magnetite concrete Cl content (wf)	5.000E-05	-3.271E+01	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	3.629E-01	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	-2.131E+02	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.821E+00
Total experimental uncertainty relative				0.0712

ALARM-TRAN-AIR-SHIELD-001

Table I-38. Case 5 scattering box 2 $^{197}\text{Au}(n,\gamma)^{198}\text{Au}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.635%			4.150E+02
Number of fissions	6.000%			1.523E+03
Scattering Box plastic bags	2.000%			5.078E+02
SILENE room concrete density (g/cm ³)	2.000E-01	-2.715E+02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-2.517E+05	3.584E-01	-2.643E+01
SILENE room concrete B content (wf)	5.450E-07	-3.611E+08	8.067E-02	-1.968E+02
SILENE assembly wall thickness (cm)	2.887E-02	-5.178E+03	8.371E-02	-1.495E+02
SILENE assembly wall density (g/cm ³)	4.500E-01	-2.619E+02	0.3237	-1.179E+02
SILENE assembly wall Cr content (wf)	5.774E-03	-1.548E+02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	1.301E+02	>0.50	negligible
Critical height (cm)	5.000E-04	-4.232E+02	1.014E-02	-2.116E-01
Solution concentration (g/L)	5.000E-02	-1.419E+02	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-2.836E+04	0.1283	-1.546E+02
Solution uranium enrichment (wf)	1.500E-05	-2.153E+01	3.357E-01	-3.229E-04
Solution temperature (deg C)	7.861E+00	1.369E+01	>0.50	negligible
Scattering Box 2 X position in room (cm)	1.000E+00	1.754E-01	>0.50	negligible
Scattering Box 2 Y position in room (cm)	1.000E+00	-1.398E+01	3.682E-01	-1.398E+01
Scattering Box 2 Z position in room (cm)	1.000E+00	-5.355E+00	>0.50	negligible
Scattering Box 2 block orientation (deg)	1.000E+00	4.120E+01	>0.50	negligible
Scattering Box 2 Al mounting plate thickness (cm)	2.887E-02	-2.690E+03	>0.50	negligible
Scattering Box 2 Al mounting plate density (g/cm ³)	3.500E-01	-1.245E+02	>0.50	negligible
Scattering Box 2 Au foil thickness (cm)	1.443E-03	-2.829E+05	4.745E-02	-4.082E+02
Scattering Box 2 Au foil radius (cm)	5.774E-03	-2.447E+03	>0.50	negligible
Scattering Box 2 Au foil mass (g)	3.090E-03	-3.718E+02	9.466E-02	-1.149E+00
Scattering Box S235JR density (g/cm ³)	4.250E-01	-8.398E+01	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	-7.400E+03	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-8.301E+04	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	9.232E+04	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	1.910E+01	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-1.358E+03	2.219E-01	-1.561E+02
Standard concrete H content (wf)	5.000E-05	3.165E+05	3.302E-01	1.583E+01
Standard concrete Si content (wf)	5.000E-05	-3.578E+03	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	-2.681E+04	4.344E-01	-1.341E+00
Standard concrete Fe content (wf)	5.000E-05	2.100E+04	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	4.584E+06	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-5.028E+03	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-1.101E+06	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	4.210E+01	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-1.154E+03	1.540E-01	-2.250E+02
Magnetite concrete H content (wf)	5.000E-05	-1.371E+05	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	-2.247E+04	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	-5.241E+04	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-4.165E+03	2.824E-01	-2.083E-01
Magnetite concrete Cl content (wf)	5.000E-05	-2.882E+06	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	1.513E+04	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	8.288E+04	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.759E+03
Total experimental uncertainty relative				0.0693

ALARM-TRAN-AIR-SHIELD-001

Table I-39. Case 5 scattering box 2 $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	2.069%			6.000E-03
Number of fissions	6.000%			1.740E-02
Scattering Box plastic bags	2.000%			5.800E-03
SILENE room concrete density (g/cm ³)	2.000E-01	4.994E-05	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-7.577E+00	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-1.082E+05	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-5.604E-02	3.275E-01	-1.618E-03
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.582E-03	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-9.649E-02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	5.937E-02	>0.50	negligible
Critical height (cm)	5.000E-04	-3.099E-03	5.930E-02	-1.550E-06
Solution concentration (g/L)	5.000E-02	4.336E-03	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-4.382E-01	0.2994	-2.389E-03
Solution uranium enrichment (wf)	1.500E-05	7.341E-05	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-1.295E-03	>0.50	negligible
Scattering Box 2 X position in room (cm)	1.000E+00	-9.256E-04	1.495E-01	-9.256E-04
Scattering Box 2 Y position in room (cm)	1.000E+00	-4.213E-04	3.387E-01	-4.213E-04
Scattering Box 2 Z position in room (cm)	1.000E+00	-9.123E-05	>0.50	negligible
Scattering Box 2 block orientation (deg)	1.000E+00	-3.916E-03	0.3751	-3.916E-03
Scattering Box 2 Al mounting plate thickness (cm)	2.887E-02	1.533E-01	>0.50	negligible
Scattering Box 2 Al mounting plate density (g/cm ³)	3.500E-01	4.892E-03	>0.50	negligible
Scattering Box 2 Ni foil thickness (cm)	1.155E-02	-1.541E-02	>0.50	negligible
Scattering Box 2 Ni foil radius (cm)	1.443E-02	2.685E-02	>0.50	negligible
Scattering Box 2 Ni foil mass (g)	1.158E-02	-2.276E-03	>0.50	negligible
Scattering Box S235JR density (g/cm ³)	4.250E-01	-2.284E-03	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	9.157E-01	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-5.123E-01	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-2.201E+00	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	4.670E-04	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-7.107E-03	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	-1.035E-01	>0.50	negligible
Standard concrete Si content (wf)	5.000E-05	6.677E-02	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	1.373E-01	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	4.584E-02	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	-2.201E+00	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-3.129E-01	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	8.561E+00	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	-8.970E-04	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-1.518E-01	4.994E-02	-2.961E-02
Magnetite concrete H content (wf)	5.000E-05	-2.068E+01	4.454E-01	-1.034E-03
Magnetite concrete Si content (wf)	5.000E-05	-2.514E-01	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	5.435E+00	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	2.377E-01	2.280E-01	1.188E-05
Magnetite concrete Cl content (wf)	5.000E-05	-5.959E+01	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	-3.353E-01	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	1.020E+01	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				3.570E-02
Total experimental uncertainty relative				0.1231

ALARM-TRAN-AIR-SHIELD-001

Table I-40. Case 5 scattering box 2 Al₂O₃ TLD experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Unc	σ_i^d
Measurement uncertainty	5.000%			2.200E-02
Number of fissions	6.000%			2.640E-02
SILENE room concrete density (g/cm ³)	2.000E-01	1.195E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-3.729E+00	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	4.502E+05	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-4.130E-02	3.917E-01	-1.192E-03
SILENE assembly wall density (g/cm ³)	4.500E-01	-5.042E-03	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-5.228E-02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	6.109E-02	>0.50	negligible
Critical height (cm)	5.000E-04	-2.757E-03	7.550E-02	-1.379E-06
Solution concentration (g/L)	5.000E-02	4.079E-03	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-1.044E-01	>0.50	negligible
Solution uranium enrichment (wf)	1.500E-05	-2.741E-04	>0.50	negligible
Solution temperature (deg C)	7.861E+00	1.123E-04	>0.50	negligible
Scattering Box 2 X position in room (cm)	1.000E+00	-3.045E-04	>0.50	negligible
Scattering Box 2 Y position in room (cm)	1.000E+00	-5.691E-04	3.514E-01	-5.691E-04
Scattering Box 2 Z position in room (cm)	1.000E+00	-3.515E-04	>0.50	negligible
Scattering Box 2 block orientation (deg)	1.000E+00	-1.971E-03	>0.50	negligible
Scattering Box 2 Al mounting plate thickness (cm)	2.887E-02	2.867E-02	>0.50	negligible
Scattering Box 2 Al mounting plate density (g/cm ³)	3.500E-01	7.151E-03	>0.50	negligible
Scattering Box S235JR density (g/cm ³)	4.250E-01	-6.512E-04	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	-3.145E+00	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-2.307E+00	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-1.217E+00	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	-2.160E-04	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-1.013E-02	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	1.168E+00	>0.50	negligible
Standard concrete Si content (wf)	5.000E-05	-2.226E-02	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	-3.080E-02	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	5.042E-01	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	-1.969E+02	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-1.791E-02	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-4.403E+00	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	6.290E-04	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-5.430E-02	1.188E-01	-1.059E-02
Magnetite concrete H content (wf)	5.000E-05	3.502E+00	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	-3.913E-01	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	-1.749E+00	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	7.541E-03	>0.50	negligible
Magnetite concrete Cl content (wf)	5.000E-05	8.264E+01	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	-3.053E-01	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	1.184E+00	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				3.598E-02
Total experimental uncertainty relative				0.0818

ALARM-TRAN-AIR-SHIELD-001

I.6 Case 6 Scattering Box Position 3 Uncertainties

Table I-41. Case 6 scattering box 3 $^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.124%			4.950E-01
Number of fissions	6.000%			2.642E+00
Scattering Box plastic bags	2.000%			8.808E-01
SILENE room concrete density (g/cm ³)	2.000E-01	2.037E-01	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	1.541E+02	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-5.113E+05	6.043E-02	-2.787E-01
SILENE assembly wall thickness (cm)	2.887E-02	-9.364E+00	5.069E-02	-2.703E-01
SILENE assembly wall density (g/cm ³)	4.500E-01	-6.054E-01	0.1589	-2.724E-01
SILENE assembly wall Cr content (wf)	5.774E-03	1.140E+00	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-2.352E+00	>0.50	negligible
Critical height (cm)	5.000E-04	-4.221E-01	1.098E-02	-2.111E-04
Solution concentration (g/L)	5.000E-02	-2.963E-01	4.279E-01	-1.481E-02
Solution density (g/cm ³)	5.451E-03	-4.695E+01	0.0721	-2.559E-01
Solution uranium enrichment (wf)	1.500E-05	-8.081E-02	1.016E-01	-1.212E-06
Solution temperature (deg C)	7.861E+00	-3.831E-02	>0.50	negligible
Scattering Box 3 X position in room (cm)	1.000E+00	-6.952E-02	1.046E-01	-6.952E-02
Scattering Box 3 Y position in room (cm)	1.000E+00	-5.505E-02	1.154E-01	-5.505E-02
Scattering Box 3 Z position in room (cm)	1.000E+00	-5.582E-03	>0.50	negligible
Scattering Box 3 Al mounting plate thickness (cm)	2.887E-02	-3.021E+00	>0.50	negligible
Scattering Box 3 Al mounting plate density (g/cm ³)	3.500E-01	-9.919E-02	>0.50	negligible
Scattering Box 3 Co foil thickness (cm)	1.155E-02	-8.926E+01	2.133E-02	-1.031E+00
Scattering Box 3 Co foil radius (cm)	1.443E-02	-5.057E+00	>0.50	negligible
Scattering Box 3 Co foil mass (g)	1.163E-02	-2.250E+00	3.654E-02	-2.616E-02
Scattering Box S235JR density (g/cm ³)	4.250E-01	-1.913E-01	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	5.037E+00	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	3.883E+01	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-2.019E+01	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	-1.780E-02	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	9.138E-01	3.611E-01	1.051E-01
Standard concrete H content (wf)	5.000E-05	9.676E+02	1.227E-01	4.838E-02
Standard concrete Si content (wf)	5.000E-05	-9.311E+00	3.023E-01	-4.656E-04
Standard concrete Al content (wf)	5.000E-05	-1.209E+01	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-7.834E+01	4.875E-01	-3.917E-03
Standard concrete Cl content (wf)	5.000E-05	4.584E+03	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-1.450E+01	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-2.426E+02	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	-4.580E-02	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-3.014E-01	>0.50	negligible
Magnetite concrete H content (wf)	5.000E-05	-5.749E+01	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	-6.914E+00	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	1.463E+01	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-2.390E+00	>0.50	negligible
Magnetite concrete Cl content (wf)	5.000E-05	8.001E+01	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	-4.144E-01	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	1.668E+00	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				3.062E+00
Total experimental uncertainty relative				0.0695

ALARM-TRAN-AIR-SHIELD-001

Table I-42. Case 6 scattering box 3 $^{197}\text{Au}(n,\gamma)^{198}\text{Au}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.570%			7.000E+02
Number of fissions	6.000%			2.676E+03
Scattering Box plastic bags	2.000%			8.920E+02
SILENE room concrete density (g/cm ³)	2.000E-01	3.068E+02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	5.163E+04	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-4.536E+08	8.952E-02	-2.472E+02
SILENE assembly wall thickness (cm)	2.887E-02	-8.191E+03	8.021E-02	-2.365E+02
SILENE assembly wall density (g/cm ³)	4.500E-01	-6.982E+02	0.1906	-3.142E+02
SILENE assembly wall Cr content (wf)	5.774E-03	1.326E+03	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-3.151E+02	>0.50	negligible
Critical height (cm)	5.000E-04	-4.169E+02	1.475E-02	-2.085E-01
Solution concentration (g/L)	5.000E-02	-4.749E+02	3.691E-01	-2.374E+01
Solution density (g/cm ³)	5.451E-03	-4.412E+04	0.1061	-2.405E+02
Solution uranium enrichment (wf)	1.500E-05	-6.633E+01	1.711E-01	-9.950E-04
Solution temperature (deg C)	7.861E+00	2.484E+00	>0.50	negligible
Scattering Box 3 X position in room (cm)	1.000E+00	-6.476E+01	1.494E-01	-6.476E+01
Scattering Box 3 Y position in room (cm)	1.000E+00	-5.909E+01	1.469E-01	-5.909E+01
Scattering Box 3 Z position in room (cm)	1.000E+00	-2.275E-01	>0.50	negligible
Scattering Box 3 Al mounting plate thickness (cm)	2.887E-02	-9.858E+02	>0.50	negligible
Scattering Box 3 Al mounting plate density (g/cm ³)	3.500E-01	-6.145E+01	>0.50	negligible
Scattering Box 3 Au foil thickness (cm)	1.443E-03	-4.662E+05	4.362E-02	-6.727E+02
Scattering Box 3 Au foil radius (cm)	5.774E-03	-1.800E+02	>0.50	negligible
Scattering Box 3 Au foil mass (g)	3.114E-03	-6.107E+02	8.688E-02	-1.902E+00
Scattering Box S235JR density (g/cm ³)	4.250E-01	-3.465E+02	3.866E-01	-1.473E+02
Scattering Box S235JR Mn content (wf)	3.300E-03	-1.737E+04	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	9.265E+04	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-2.783E+04	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	-6.100E+01	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	1.323E+02	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	7.044E+05	2.331E-01	3.522E+01
Standard concrete Si content (wf)	5.000E-05	-6.070E+03	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	-2.393E+04	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-6.719E+04	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	1.620E+06	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-1.619E+04	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-1.650E+06	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	4.580E+01	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-2.934E+02	>0.50	negligible
Magnetite concrete H content (wf)	5.000E-05	-8.459E+04	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	-1.978E+04	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	-4.021E+04	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-1.307E+03	>0.50	negligible
Magnetite concrete Cl content (wf)	5.000E-05	-3.601E+05	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	-3.802E+02	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	4.948E+04	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				3.034E+03
Total experimental uncertainty relative				0.0680

ALARM-TRAN-AIR-SHIELD-001

Table I-43. Case 6 scattering box 3 $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ experimental uncertainties

Uncertainty Source	Uncertainty Value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.698%			5.500E-02
Number of fissions	6.000%			1.944E-01
Scattering Box plastic bags	2.000%			6.480E-02
SILENE room concrete density (g/cm ³)	2.000E-01	-1.533E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-1.146E+01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	7.449E+05	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-4.984E-01	1.394E-01	-1.439E-02
SILENE assembly wall density (g/cm ³)	4.500E-01	-3.677E-02	0.3822	-1.655E-02
SILENE assembly wall Cr content (wf)	5.774E-03	-1.651E-02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	6.555E-02	>0.50	negligible
Critical height (cm)	5.000E-04	-5.322E-03	1.258E-01	-2.661E-06
Solution concentration (g/L)	5.000E-02	-1.035E-02	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-2.725E+00	0.1817	-1.485E-02
Solution uranium enrichment (wf)	1.500E-05	-9.638E-04	>0.50	negligible
Solution temperature (deg C)	7.861E+00	-3.831E-02	>0.50	negligible
Scattering Box 3 X position in room (cm)	1.000E+00	-6.959E-03	1.183E-01	-6.959E-03
Scattering Box 3 Y position in room (cm)	1.000E+00	-7.131E-03	1.135E-01	-7.131E-03
Scattering Box 3 Z position in room (cm)	1.000E+00	-5.589E-04	>0.50	negligible
Scattering Box 3 Al mounting plate thickness (cm)	2.887E-02	-3.081E-01	>0.50	negligible
Scattering Box 3 Al mounting plate density (g/cm ³)	3.500E-01	-4.889E-03	>0.50	negligible
Scattering Box 3 Ni foil thickness (cm)	1.155E-02	-1.030E-01	>0.50	negligible
Scattering Box 3 Ni foil radius (cm)	1.443E-02	-3.651E-02	>0.50	negligible
Scattering Box 3 Ni foil mass (g)	1.160E-02	-1.369E-03	>0.50	negligible
Scattering Box S235JR density (g/cm ³)	4.250E-01	-2.130E-03	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	4.393E-01	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-3.882E+00	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-2.724E-02	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	-4.100E-04	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-4.258E-02	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	-2.514E+01	>0.50	negligible
Standard concrete Si content (wf)	5.000E-05	-3.864E-01	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	-3.955E-01	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-2.902E+00	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	5.401E+02	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-1.880E+00	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	4.176E+01	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	3.040E-03	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-3.122E-02	>0.50	negligible
Magnetite concrete H content (wf)	5.000E-05	-1.018E+01	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	7.740E-01	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	7.661E+00	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	5.252E-02	>0.50	negligible
Magnetite concrete Cl content (wf)	5.000E-05	-1.160E+02	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	4.983E-01	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	9.172E+00	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				2.140E-01
Total experimental uncertainty relative				0.0661

ALARM-TRAN-AIR-SHIELD-001

Table I-44. Case 6 scattering box 3 Al₂O₃ TLD experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	5.000%			8.800E-02
Number of fissions	6.000%			1.056E-01
SILENE room concrete density (g/cm ³)	2.000E-01	-4.337E-03	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	-2.536E+00	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-1.552E+05	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-1.248E-01	4.218E-01	-3.603E-03
SILENE assembly wall density (g/cm ³)	4.500E-01	-7.139E-03	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-1.089E-01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	1.352E-01	>0.50	negligible
Critical height (cm)	5.000E-04	2.398E-03	2.659E-01	1.199E-06
Solution concentration (g/L)	5.000E-02	2.518E-02	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-2.998E-01	>0.50	negligible
Solution uranium enrichment (wf)	1.500E-05	2.222E-03	4.201E-01	3.332E-08
Solution temperature (deg C)	7.861E+00	3.970E-04	>0.50	negligible
Scattering Box 3 X position in room (cm)	1.000E+00	-2.499E-03	2.884E-01	-2.499E-03
Scattering Box 3 Y position in room (cm)	1.000E+00	-2.383E-03	2.481E-01	-2.383E-03
Scattering Box 3 Z position in room (cm)	1.000E+00	-1.623E-03	>0.50	negligible
Scattering Box 3 Al mounting plate thickness (cm)	2.887E-02	2.295E-01	>0.50	negligible
Scattering Box 3 Al mounting plate density (g/cm ³)	3.500E-01	5.405E-03	>0.50	negligible
Scattering Box S235JR density (g/cm ³)	4.250E-01	-6.029E-03	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	2.789E-01	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-8.739E+00	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	2.238E+00	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	1.008E-02	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	3.710E-02	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	8.522E+00	>0.50	negligible
Standard concrete Si content (wf)	5.000E-05	-1.424E-01	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	6.666E-01	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	8.404E-01	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	-7.445E+02	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	3.007E-02	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	6.704E+01	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	-1.450E-03	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	8.488E-03	>0.50	negligible
Magnetite concrete H content (wf)	5.000E-05	-2.759E+00	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	4.049E-01	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	1.437E+00	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	8.755E-03	>0.50	negligible
Magnetite concrete Cl content (wf)	5.000E-05	2.824E+02	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	-1.677E-01	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	4.296E+00	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.376E-01
Total experimental uncertainty relative				0.0782

ALARM-TRAN-AIR-SHIELD-001

I.7 Case 7 Scattering Box Position 4 Uncertainties

Table I-45. Case 7 scattering box 4 $^{59}\text{Co}(\text{n},\gamma)^{60}\text{Co}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.089%			4.350E-01
Number of fissions	6.000%			2.396E+00
Scattering Box plastic bags	2.000%			7.986E-01
SILENE room concrete density (g/cm ³)	2.000E-01	3.732E-01	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	6.820E+01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-5.201E+05	6.281E-02	-2.834E-01
SILENE assembly wall thickness (cm)	2.887E-02	-7.848E+00	5.496E-02	-2.266E-01
SILENE assembly wall density (g/cm ³)	4.500E-01	-6.116E-01	0.1428	-2.752E-01
SILENE assembly wall Cr content (wf)	5.774E-03	9.006E-01	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-4.613E+00	>0.50	negligible
Critical height (cm)	5.000E-04	-4.236E-01	9.966E-03	-2.118E-04
Solution concentration (g/L)	5.000E-02	-3.116E-01	3.690E-01	-1.558E-02
Solution density (g/cm ³)	5.451E-03	-3.665E+01	0.0837	-1.998E-01
Solution uranium enrichment (wf)	1.500E-05	-6.693E-02	1.113E-01	-1.004E-06
Solution temperature (deg C)	7.861E+00	-2.124E-02	>0.50	negligible
Scattering Box 4 X position in room (cm)	1.000E+00	-3.482E-02	1.750E-01	-3.482E-02
Scattering Box 4 Y position in room (cm)	1.000E+00	-7.486E-02	7.200E-02	-7.486E-02
Scattering Box 4 Z position in room (cm)	1.000E+00	1.158E-02	>0.50	negligible
Scattering Box 4 block orientation (deg)	1.000E+00	3.064E-01	0.1127	3.064E-01
Scattering Box 4 Al mounting plate thickness (cm)	2.887E-02	-4.322E+00	>0.50	negligible
Scattering Box 4 Al mounting plate density (g/cm ³)	3.500E-01	-7.218E-02	>0.50	negligible
Scattering Box 4 Co foil thickness (cm)	1.155E-02	-8.335E+01	2.075E-02	-9.625E-01
Scattering Box 4 Co foil radius (cm)	1.443E-02	-3.346E+00	>0.50	negligible
Scattering Box 4 Co foil mass (g)	1.158E-02	-2.233E+00	3.358E-02	-2.586E-02
Scattering Box S235JR density (g/cm ³)	4.250E-01	-2.460E-01	3.575E-01	-1.045E-01
Scattering Box S235JR Mn content (wf)	3.300E-03	9.116E+00	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-6.620E+01	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	8.731E+01	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	9.500E-02	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-8.649E-01	3.468E-01	-9.946E-02
Standard concrete H content (wf)	5.000E-05	6.341E+02	1.701E-01	3.171E-02
Standard concrete Si content (wf)	5.000E-05	-6.151E+00	4.153E-01	-3.075E-04
Standard concrete Al content (wf)	5.000E-05	7.592E+00	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-8.373E+01	4.144E-01	-4.187E-03
Standard concrete Cl content (wf)	5.000E-05	-3.120E+03	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-8.664E+00	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-1.974E+02	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	3.950E-02	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-3.011E-01	>0.50	negligible
Magnetite concrete H content (wf)	5.000E-05	2.221E+01	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	-1.107E+01	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	-2.712E+01	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-1.671E+00	>0.50	negligible
Magnetite concrete Cl content (wf)	5.000E-05	-8.001E+01	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	4.628E+00	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	-2.057E+02	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				2.804E+00
Total experimental uncertainty relative				0.0702

ALARM-TRAN-AIR-SHIELD-001

Table I-46. Case 7 scattering box 4 $^{197}\text{Au}(n,\gamma)^{198}\text{Au}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.550%			6.000E+02
Number of fissions	6.000%			2.322E+03
Scattering Box plastic bags	2.000%			7.740E+02
SILENE room concrete density (g/cm ³)	2.000E-01	2.327E+02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	1.076E+05	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	-4.329E+08	8.448E-02	-2.359E+02
SILENE assembly wall thickness (cm)	2.887E-02	-6.976E+03	8.479E-02	-2.014E+02
SILENE assembly wall density (g/cm ³)	4.500E-01	-5.700E+02	0.2101	-2.565E+02
SILENE assembly wall Cr content (wf)	5.774E-03	-6.158E+02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	-1.553E+02	>0.50	negligible
Critical height (cm)	5.000E-04	-4.146E+02	1.387E-02	-2.073E-01
Solution concentration (g/L)	5.000E-02	-2.483E+02	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-3.325E+04	0.1267	-1.812E+02
Solution uranium enrichment (wf)	1.500E-05	-4.821E+01	2.121E-01	-7.232E-04
Solution temperature (deg C)	7.861E+00	4.152E+01	>0.50	negligible
Scattering Box 4 X position in room (cm)	1.000E+00	-2.537E+01	3.028E-01	-2.537E+01
Scattering Box 4 Y position in room (cm)	1.000E+00	-8.086E+01	8.420E-02	-8.086E+01
Scattering Box 4 Z position in room (cm)	1.000E+00	-5.757E+00	>0.50	negligible
Scattering Box 4 block orientation (deg)	1.000E+00	2.978E+02	0.1586	2.978E+02
Scattering Box 4 Al mounting plate thickness (cm)	2.887E-02	-2.042E+03	>0.50	negligible
Scattering Box 4 Al mounting plate density (g/cm ³)	3.500E-01	-5.965E+01	>0.50	negligible
Scattering Box 4 Au foil thickness (cm)	1.443E-03	-4.337E+05	4.230E-02	-6.258E+02
Scattering Box 4 Au foil radius (cm)	5.774E-03	-3.950E+02	>0.50	negligible
Scattering Box 4 Au foil mass (g)	3.114E-03	-5.720E+02	8.073E-02	-1.781E+00
Scattering Box S235JR density (g/cm ³)	4.250E-01	-1.903E+02	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	4.575E+04	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	2.136E+05	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	-2.074E+04	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	1.061E+02	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-6.043E+02	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	3.834E+05	3.859E-01	1.917E+01
Standard concrete Si content (wf)	5.000E-05	-2.821E+03	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	2.019E+04	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-6.125E+04	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	7.565E+06	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-2.115E+04	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-7.477E+05	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	-1.060E+01	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-3.980E+02	>0.50	negligible
Magnetite concrete H content (wf)	5.000E-05	6.882E+04	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	-1.073E+04	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	-1.123E+05	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-8.851E+02	>0.50	negligible
Magnetite concrete Cl content (wf)	5.000E-05	-1.659E+06	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	-1.188E+04	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	3.446E+04	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				2.652E+03
Total experimental uncertainty relative				0.0685

ALARM-TRAN-AIR-SHIELD-001

Table I-47. Case 7 scattering box 4 $^{58}\text{Ni}(\text{n},\text{p})^{58}\text{Co}$ experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	1.652%			5.500E-02
Number of fissions	6.000%			1.998E-01
Scattering Box plastic bags	2.000%			6.660E-02
SILENE room concrete density (g/cm ³)	2.000E-01	-5.881E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	2.576E+01	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	2.841E+04	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-4.304E-01	2.168E-01	-1.243E-02
SILENE assembly wall density (g/cm ³)	4.500E-01	-2.548E-02	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	-8.497E-03	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	2.899E-02	>0.50	negligible
Critical height (cm)	5.000E-04	-7.084E-03	1.274E-01	-3.542E-06
Solution concentration (g/L)	5.000E-02	9.074E-03	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	-2.847E+00	0.2326	-1.552E-02
Solution uranium enrichment (wf)	1.500E-05	4.922E-05	>0.50	negligible
Solution temperature (deg C)	7.861E+00	5.723E-03	>0.50	negligible
Scattering Box 4 X position in room (cm)	1.000E+00	-6.861E-03	1.636E-01	-6.861E-03
Scattering Box 4 Y position in room (cm)	1.000E+00	-9.318E-03	1.146E-01	-9.318E-03
Scattering Box 4 Z position in room (cm)	1.000E+00	6.830E-04	>0.50	negligible
Scattering Box 4 block orientation (deg)	1.000E+00	1.482E-02	>0.50	negligible
Scattering Box 4 Al mounting plate thickness (cm)	2.887E-02	-1.337E-01	>0.50	negligible
Scattering Box 4 Al mounting plate density (g/cm ³)	3.500E-01	-6.022E-03	>0.50	negligible
Scattering Box 4 Ni foil thickness (cm)	1.155E-02	-6.413E-01	>0.50	negligible
Scattering Box 4 Ni foil radius (cm)	1.443E-02	-6.767E-02	>0.50	negligible
Scattering Box 4 Ni foil mass (g)	1.156E-02	-1.070E-02	>0.50	negligible
Scattering Box S235JR density (g/cm ³)	4.250E-01	-1.250E-02	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	-4.897E+00	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-9.090E+00	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	1.689E+01	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	-1.390E-02	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	-6.584E-03	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	-5.919E+00	>0.50	negligible
Standard concrete Si content (wf)	5.000E-05	-1.294E-01	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	-4.982E-03	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	-6.759E-01	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	-2.157E+02	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	6.178E-01	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	-7.299E+01	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	-9.920E-03	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	-2.725E-03	>0.50	negligible
Magnetite concrete H content (wf)	5.000E-05	1.077E+01	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	2.608E-01	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	-1.539E+00	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-3.831E-02	>0.50	negligible
Magnetite concrete Cl content (wf)	5.000E-05	-1.820E+02	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	-7.424E-02	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	1.017E+01	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				2.189E-01
Total experimental uncertainty relative				0.0657

ALARM-TRAN-AIR-SHIELD-001

Table I-48. Case 7 scattering box 4 Al₂O₃ TLD experimental uncertainties

Uncertainty source	Uncertainty value (σ_i)	Sensitivity (S_i^d) Value	Sensitivity (S_i^d) Unc	σ_i^d
Measurement uncertainty	5.000%			9.350E-02
Number of fissions	6.000%			1.122E-01
SILENE room concrete density (g/cm ³)	2.000E-01	2.015E-02	>0.50	negligible
SILENE room concrete H content (wf)	1.050E-04	4.998E+00	>0.50	negligible
SILENE room concrete B content (wf)	5.450E-07	9.929E+04	>0.50	negligible
SILENE assembly wall thickness (cm)	2.887E-02	-2.880E-01	1.750E-01	-8.314E-03
SILENE assembly wall density (g/cm ³)	4.500E-01	-1.937E-02	>0.50	negligible
SILENE assembly wall Cr content (wf)	5.774E-03	4.338E-02	>0.50	negligible
SILENE assembly wall Ni content (wf)	5.774E-03	2.259E-02	>0.50	negligible
Critical height (cm)	5.000E-04	4.075E-03	1.204E-01	2.038E-06
Solution concentration (g/L)	5.000E-02	1.241E-02	>0.50	negligible
Solution density (g/cm ³)	5.451E-03	5.511E-02	>0.50	negligible
Solution uranium enrichment (wf)	1.500E-05	9.465E-04	>0.50	negligible
Solution temperature (deg C)	7.861E+00	1.092E-02	0.4691	8.582E-02
Scattering Box 4 X position in room (cm)	1.000E+00	-1.397E-03	4.961E-01	-1.397E-03
Scattering Box 4 Y position in room (cm)	1.000E+00	-3.422E-03	1.535E-01	-3.422E-03
Scattering Box 4 Z position in room (cm)	1.000E+00	6.770E-04	>0.50	negligible
Scattering Box 4 block orientation (deg)	1.000E+00	-6.915E-03	>0.50	negligible
Scattering Box 4 Al mounting plate thickness (cm)	2.887E-02	-9.324E-02	>0.50	negligible
Scattering Box 4 Al mounting plate density (g/cm ³)	3.500E-01	-4.773E-03	>0.50	negligible
Scattering Box S235JR density (g/cm ³)	4.250E-01	3.820E-05	>0.50	negligible
Scattering Box S235JR Mn content (wf)	3.300E-03	1.362E+00	>0.50	negligible
Scattering Box S235JR C content (wf)	4.007E-04	-4.686E+00	>0.50	negligible
Scattering Box S235JR Cu content (wf)	1.296E-03	4.081E+00	>0.50	negligible
Standard concrete thickness (cm)	2.887E-02	7.200E-04	>0.50	negligible
Standard concrete density (g/cm ³)	1.150E-01	6.893E-03	>0.50	negligible
Standard concrete H content (wf)	5.000E-05	6.035E+00	>0.50	negligible
Standard concrete Si content (wf)	5.000E-05	1.891E-01	>0.50	negligible
Standard concrete Al content (wf)	5.000E-05	-2.178E-01	>0.50	negligible
Standard concrete Fe content (wf)	5.000E-05	1.635E+00	>0.50	negligible
Standard concrete Cl content (wf)	5.000E-05	-4.602E+01	>0.50	negligible
Standard concrete Ca content (wf)	5.000E-05	-3.632E-01	>0.50	negligible
Standard concrete Mn content (wf)	5.000E-05	1.974E+01	>0.50	negligible
Magnetite concrete thickness (cm)	2.887E-02	-1.300E-04	>0.50	negligible
Magnetite concrete density (g/cm ³)	1.950E-01	6.974E-03	>0.50	negligible
Magnetite concrete H content (wf)	5.000E-05	9.882E+00	>0.50	negligible
Magnetite concrete Si content (wf)	5.000E-05	-3.685E-03	>0.50	negligible
Magnetite concrete Al content (wf)	5.000E-05	-1.730E-01	>0.50	negligible
Magnetite concrete Fe content (wf)	5.000E-05	-6.481E-02	>0.50	negligible
Magnetite concrete Cl content (wf)	5.000E-05	-3.999E+00	>0.50	negligible
Magnetite concrete Ca content (wf)	5.000E-05	4.868E-01	>0.50	negligible
Magnetite concrete Mn content (wf)	5.000E-05	-1.612E+00	>0.50	negligible
Total experimental uncertainty absolute (σ_{tot}^d)				1.696E-01
Total experimental uncertainty relative				0.0907